

AGLO D

High-density rebonded foam with perforated PVC facing, combining sound absorption, reduced airborne sound transmission, and cost-effective performance.



The **AKUSTIKABSORBER AGLO D** range consists of **high-density rebonded foam (150 kg/m³)** specifically designed for acoustic applications requiring a balance between **sound absorption and reduced airborne sound transmission**. The material features a **perforated PVC facing** that provides a functional and attractive finish while allowing sound to penetrate into the foam and protecting it against dust and dirt.

Thanks to its **high density**, the rebonded foam adds mass to the system and therefore contributes to **reducing airborne sound transmission**. At the same time, the perforated facing allows sound to reach the foam, providing **effective absorption at medium and high frequencies**. This combination makes AGLO D an effective material for reducing reverberation and controlling noise in **industrial environments, technical cabins, acoustic enclosures, and machinery rooms**, among other applications.

AGLO D is particularly suitable for projects requiring a **good balance between acoustic performance and cost**. It is easy to install using adhesives or mechanical fasteners, while its robust construction makes it suitable for technical and industrial environments.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com

Drawings

AGLO D 150/20

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
AGLO D 150/20	28300	-	23	7

AGLO D A 150/20

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
AGLO D A 150/20	28302	✓	23	7

AGLO D 150/40

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
AGLO D 150/40	28301	-	23	18

AGLO D A 150/40

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
AGLO D A 150/40	28303	✓	23	13



AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain



Tel.: +34 843 74 00 13





sales@amcsa.es



www.mecanocaucho.com

Elastic properties

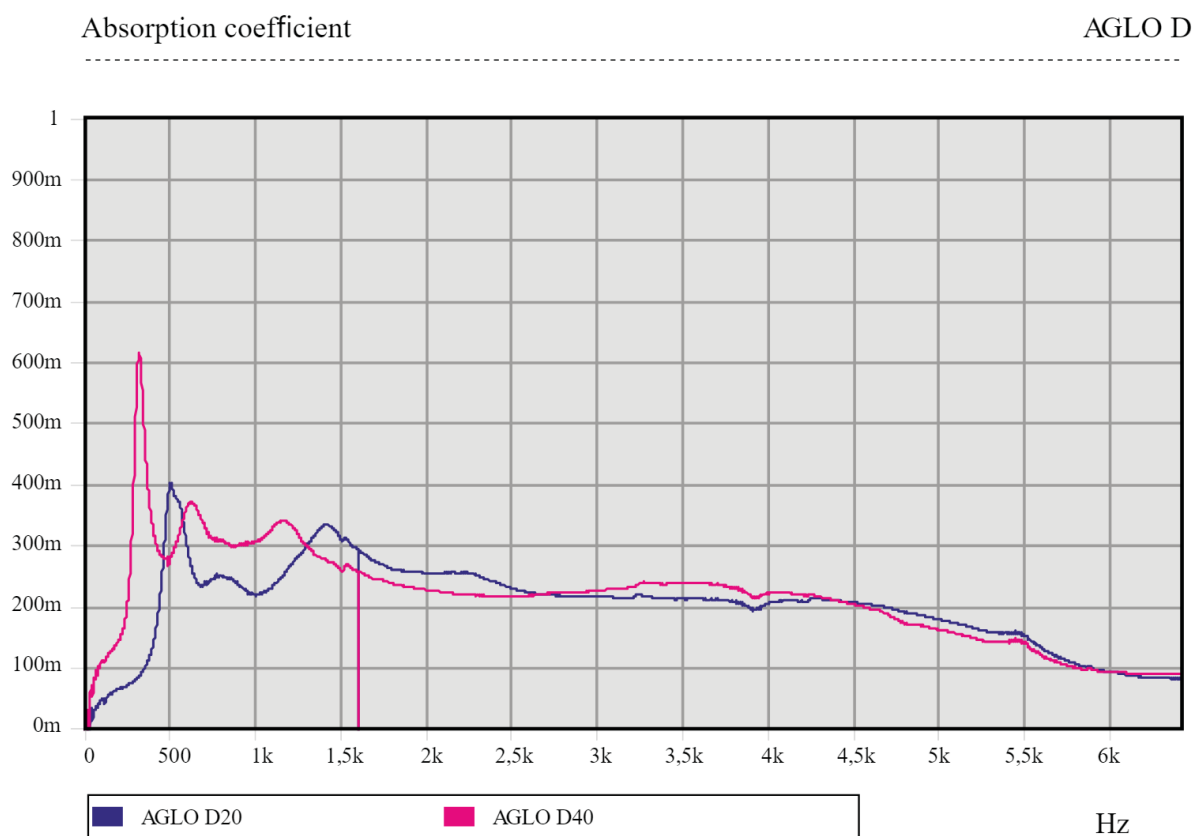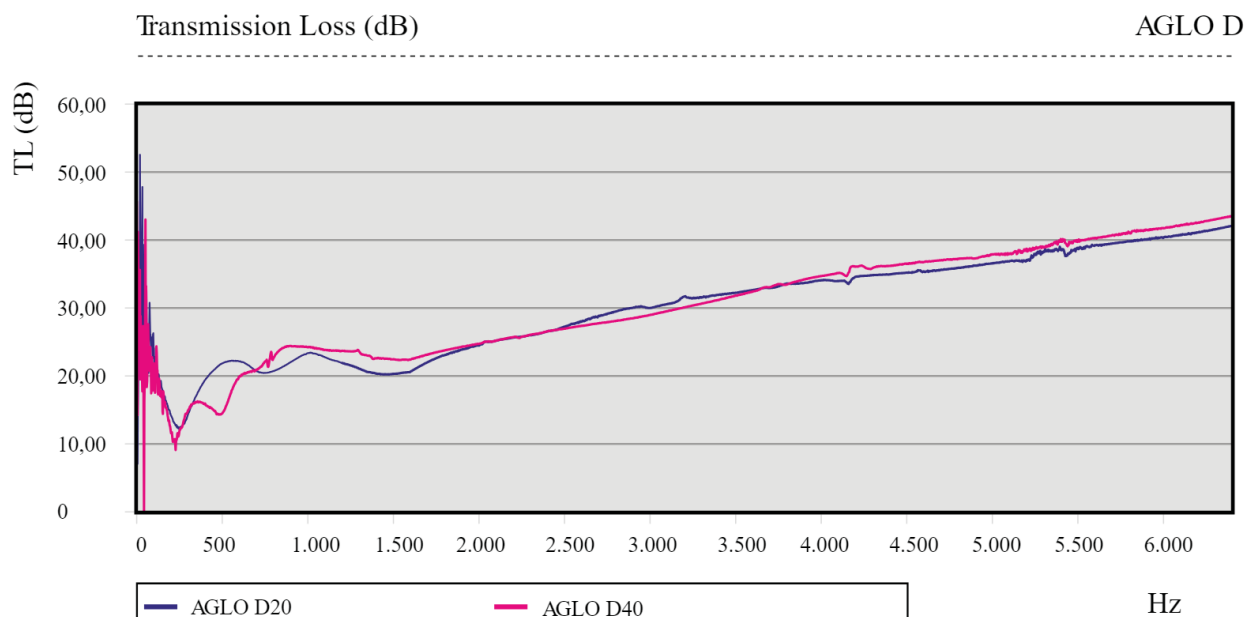

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

Technical characteristics

- Composition Beige perforated PVC facing and bound polyurethane foam with a density of 150 Kg/m³.
- Thicknesses 20mm 40mm

Formats

- Sheets 2000x1000 mm
- Rolls Consult for roll manufacturing.