
Akustik pipe omega +Sylomer®

Resilient pipe support with Sylomer® for the isolation of piping from metal support structures.

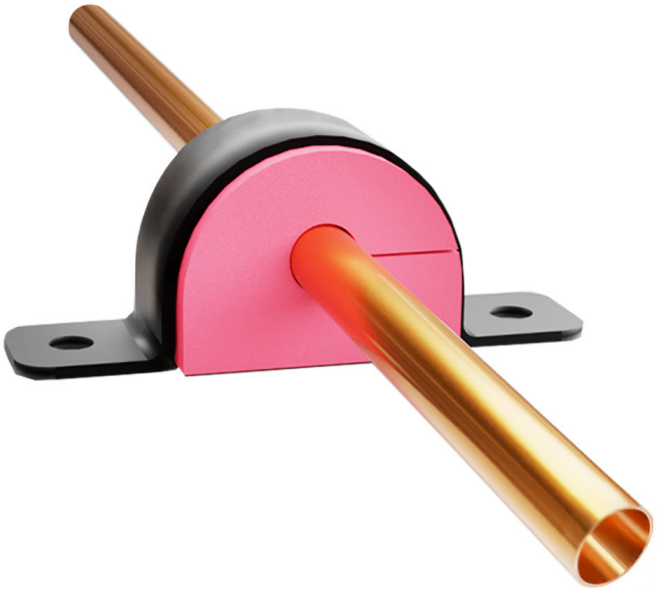

The **Akustik Pipe Omega + Sylomer® support from AMC-MECANOCAUCHO®** is designed to provide resilient isolation between piping and its supporting structure, reducing the transmission of **vibration and structure-borne noise**.

The **Sylomer® element**, integrated into the metal support, prevents rigid contact between the piping and the structure, helping to reduce **acoustic bridges**. Its simple, compact design facilitates installation while providing effective vibration isolation.


Akustik Pipe Omega + Sylomer® is particularly suitable for **piping, HVAC systems and mechanical installations** requiring a simple, reliable and cost-effective isolation system.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Drawings

Type Omega

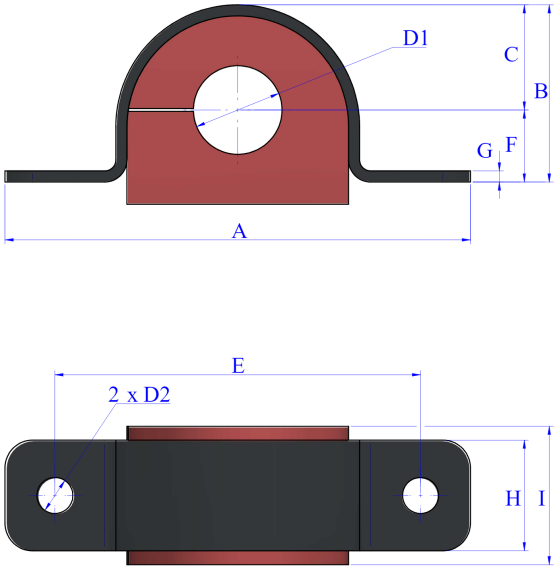


Type	Code	K(N/mm)	A(in)	B(in)	C(in)	E(in)	F(in)	G(in)	H(in)	I(in)	D1	Ext. Diam. pipe D1	D2
Type Omega	23892	28	3.31	1.26	0.75	2.6	0.51	0.08	0.79	0.98	0.39	1/2"	0.26
	23893	54	3.31	1.26	0.75	2.6	0.51	0.08	0.79	0.98	0.55	5/8"	0.26
	23894	43	3.7	1.65	0.94	2.99	0.71	0.08	0.79	0.98	0.79	7/8"	0.26
	23895	61	3.7	1.65	0.94	2.99	0.71	0.08	0.79	0.98	1.02	1-1/8"	0.26
	23896	28	2.72	0.94	0.51	2.01	0.43	0.08	0.79	0.98	0.22	1/4"	0.26
	23897	55	3.31	1.26	0.75	2.6	0.51	0.08	0.79	0.98	0.63	3/4"	0.26
	23898	110	4.09	1.97	1.1	3.39	0.87	0.08	0.79	0.98	1.3	1-3/8"	0.26
	23925	130	5.51	3.03	1.57	4.49	1.46	0.08	1.18	1.18	1.57	1-5/8"	0.32
	23926	203	5.51	3.03	1.57	4.49	1.46	0.08	1.18	1.18	2.05	2-1/8"	0.32

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Elastic properties

LOAD-DEFLECTION

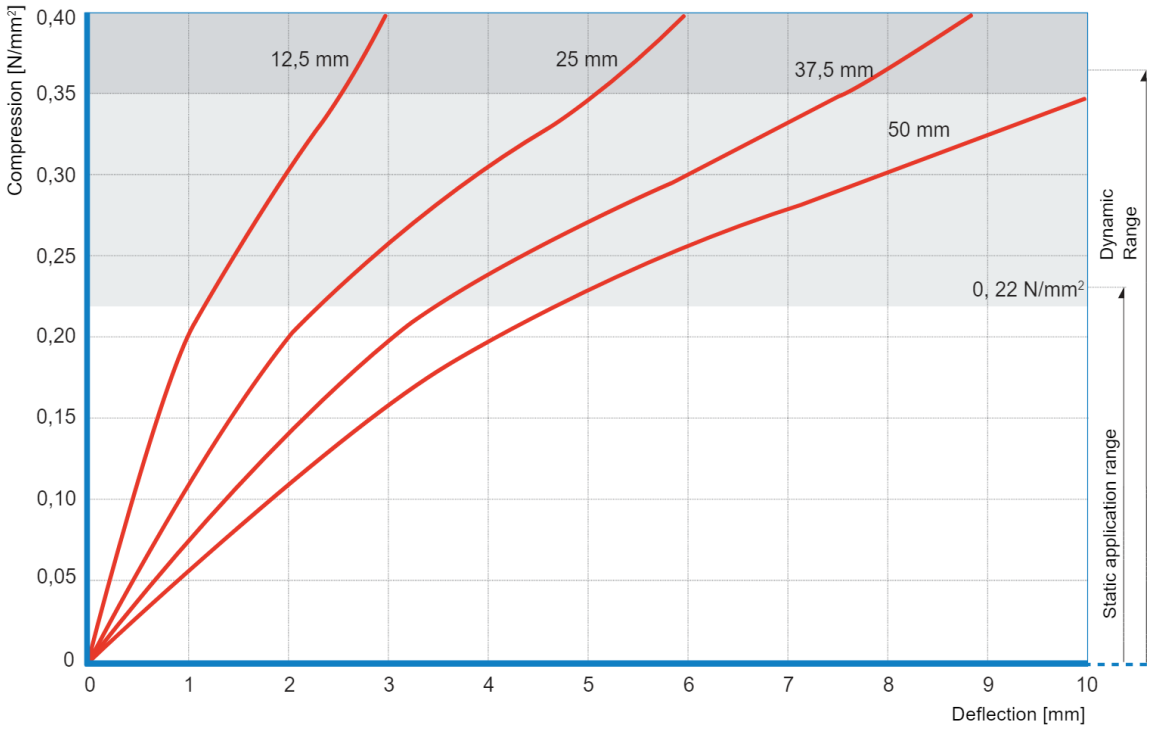

NATURAL FREQUENCY

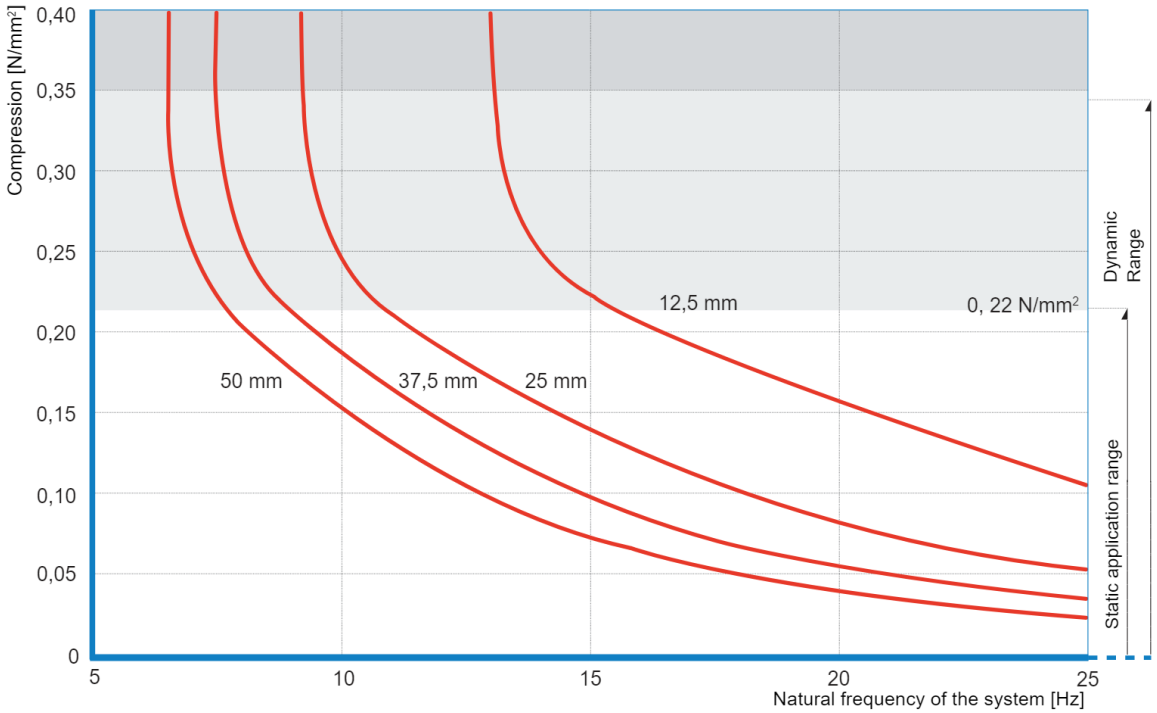

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Technical characteristics

- Compact design
- Fail-safe feature
- Multidirectional mount
- Excellent noise isolation
- Corrosion resistant
- Maintenance-free
- No aging

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Improved isolation

It offers improved isolation compared to conventional anti-vibration mounts of similar geometry.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.