
Akustik pipe

Resilient pipe Anti-vibration mount with Sylomer® for the acoustic isolation of rigid and flexible pipework and the reduction of structure-borne noise.

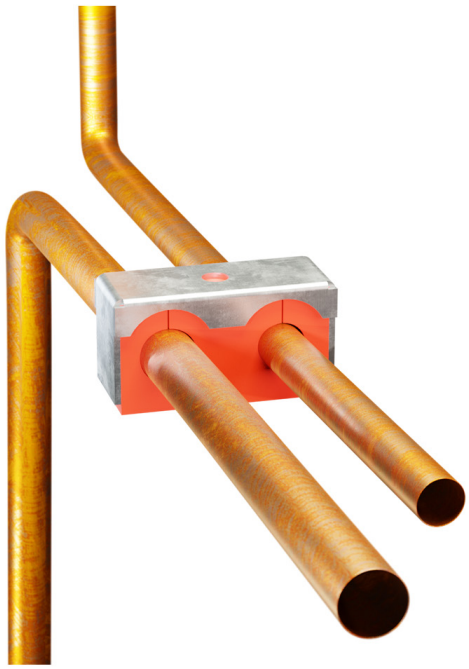

The **Akustik Pipe AMC-MECANOCAUCHO®** is a resilient pipe support designed to **isolate rigid and flexible pipework** from its supporting structure, reducing the transmission of vibration and **structure-borne noise**.

Its **Sylomer® resilient element** provides effective isolation between the pipework and the supporting structure, helping to minimise **acoustic bridges**. Its compact design facilitates installation and allows the Sylomer® preload to be adjusted during mounting.


Akustik Pipe is particularly suitable for **HVAC systems, hydraulic pipework and technical installations**, both for static applications and for pipework subject to vibration.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Drawings

Type A

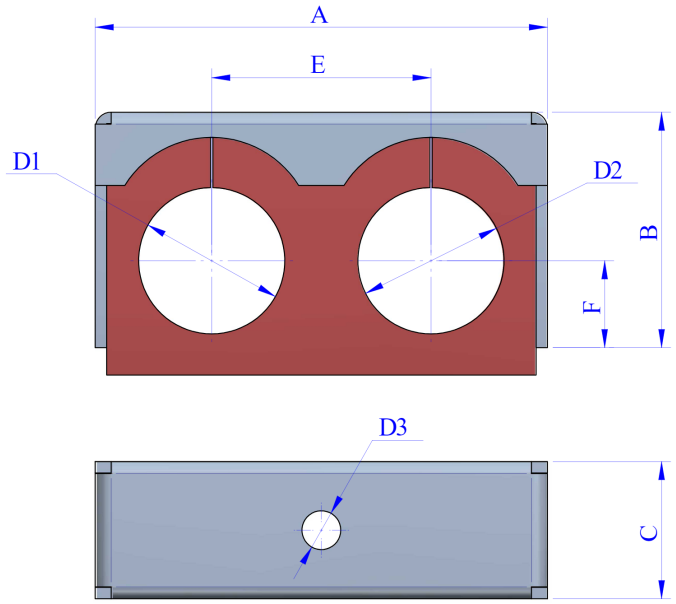


Type	Code	K(N/mm)	A(mm)	B(mm)	C(mm)	E(mm)	F(mm)	D1	Pipe Ext. Diam. D1	D2	Pipe Ext. Diam. D2	D3
Type A	23872	84	70	34,5	29	36	14,5	15	5/8"	18	3/4"	8,5
	23873	100	70	34,5	29	36	14,5	18	3/4"	18	3/4"	8,5
	23874	76	82	42	29	43	16	21,2	7/8"	24,3	1"	8,5
	23871	302	70	34,5	29	36	13	22	7/8"	22	7/8"	8,5
	23876	53	99	51,5	30	48	21	28	1-1/8"	28	1-1/8"	8,5
	23875	106	99	51,5	30	48	21	32	1-3/8"	32	1-3/8"	8,5

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Type B

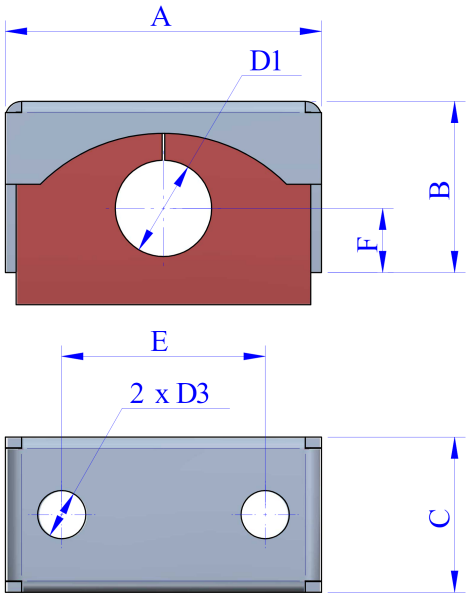



Type	Code	K(N/mm)	A(mm)	B(mm)	C(mm)	E(mm)	F(mm)	D1	Pipe Ext. Diam. D1	D2	D3
Type B	23877	96	59	32	29	38	12	18	3/4"	-	9

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Type Omega

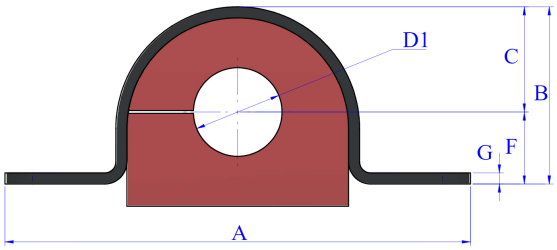

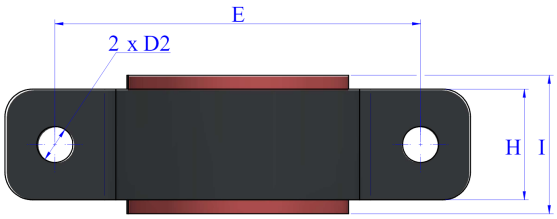


Type	Code	K(N/mm)	A(mm)	B(mm)	C(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)	D1	Pipe Ext. Diam. D1	D2
Type Omega	23892	28	84	32	19	66	13	2	20	25	10	1/2"	6,5
	23893	54	84	32	19	66	13	2	20	25	14	5/8"	6,5
	23894	43	94	42	24	76	18	2	20	25	20	7/8"	6,5
	23895	61	94	42	24	76	18	2	20	25	26	1-1/8"	6,5
	23896	28	69	24	13	51	11	2	20	25	5,5	1/4"	6,5
	23897	55	84	32	19	66	13	2	20	25	16	3/4"	6,5
	23898	110	104	50	28	86	22	2	20	25	33	1-3/8"	6,5
	23925	130	140	77	40	114	37	2	30	30	40	1-5/8"	8,1
	23926	203	140	77	40	114	37	2	30	30	52	2-1/8"	8,1

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Akustik Pipe Maxi

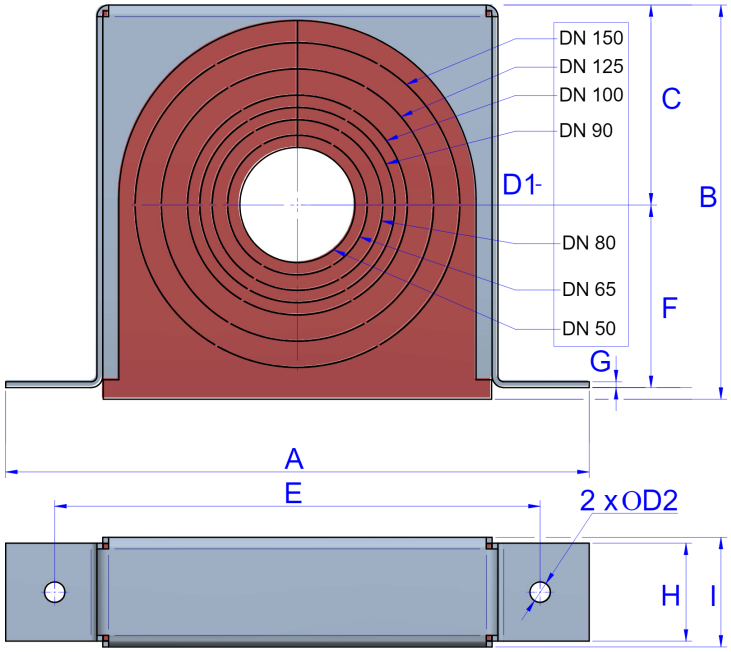


Type	Code	K(N/mm)	A(mm)	B(mm)	C(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)	D1	D2
Akustik Pipe Maxi	23839	-	300,5	203	94	250	94	3	50,5	56,5	DN50 / DN65 / DN80 / DN90 / DN100 / DN125 / DN150	10,5

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Elastic properties

LOAD-DEFLECTION

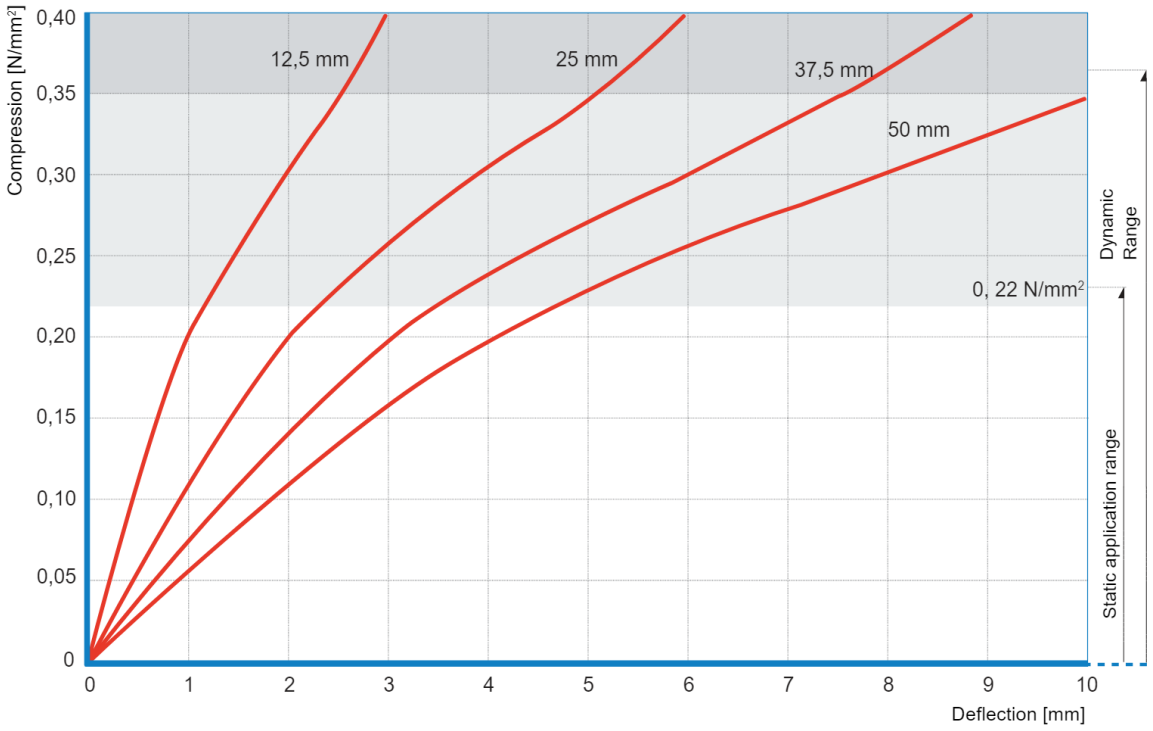

NATURAL FREQUENCY

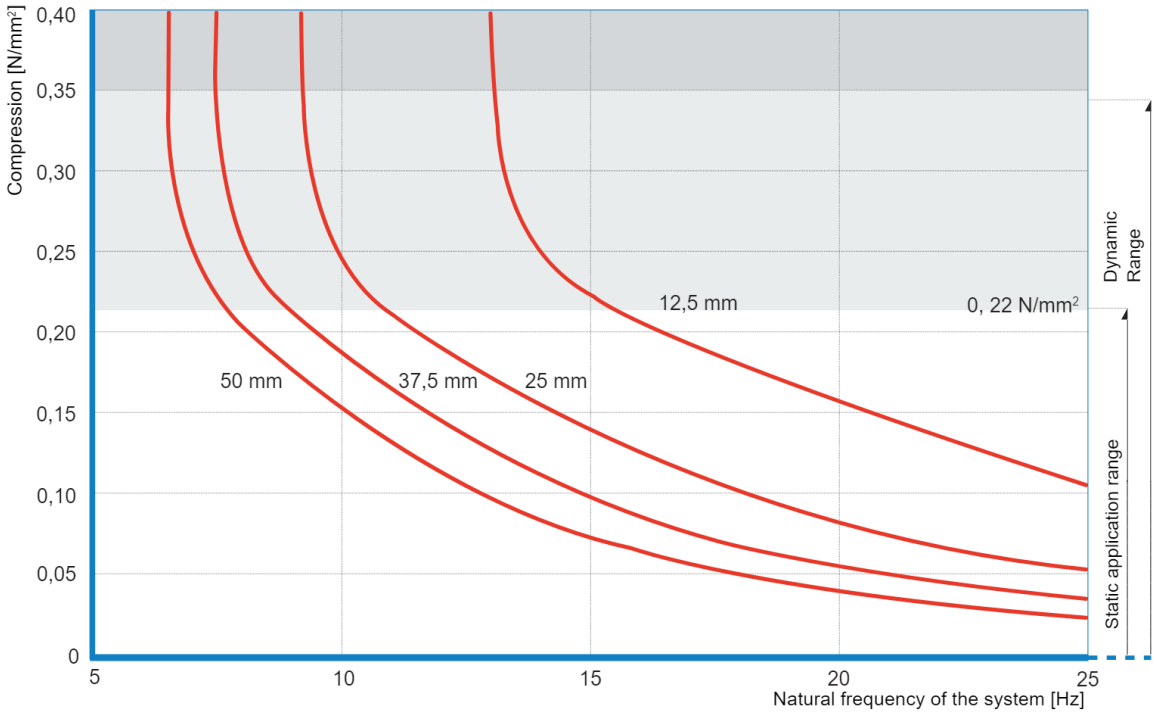

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Technical characteristics

- Compact design
- Fail-safe feature
- Multidirectional mount
- Excellent noise isolation
- Corrosion resistant
- Maintenance-free
- No aging

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.