


Akustik pipe

Sylomer® Vibration Isolator for hydraulic pipes and hoses.
Reduces vibrations and structural noise with quick and adaptable installation.

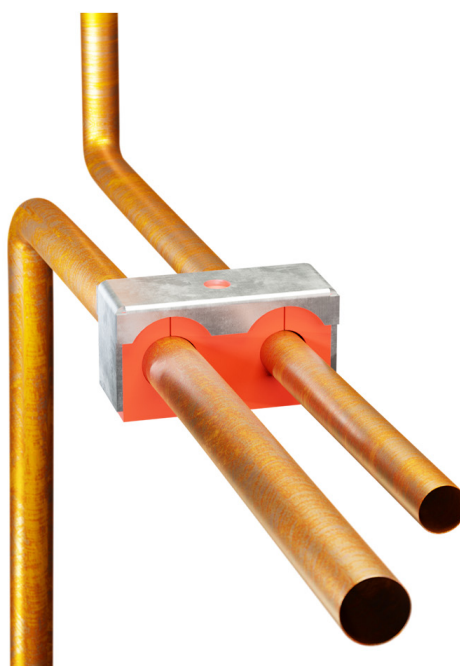

The **Akustik Pipe AMC-MECANOCAUCHO®** is a resilient pipe mount designed to **isolate rigid and flexible pipework** from its supporting structure, reducing the transmission of vibration and **structure-borne noise**.

Its **Sylomer® resilient element** provides effective isolation between the pipework and the supporting structure, helping to minimise **acoustic bridges**. Its compact design facilitates installation and allows the Sylomer® preload to be adjusted during mounting.

Akustik Pipe is particularly suitable for **HVAC systems, hydraulic pipework and technical installations**, both for static applications and for pipework subject to vibration.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13




sales@amcsa.es



www.mecanocaucho.com


Drawings

Type A

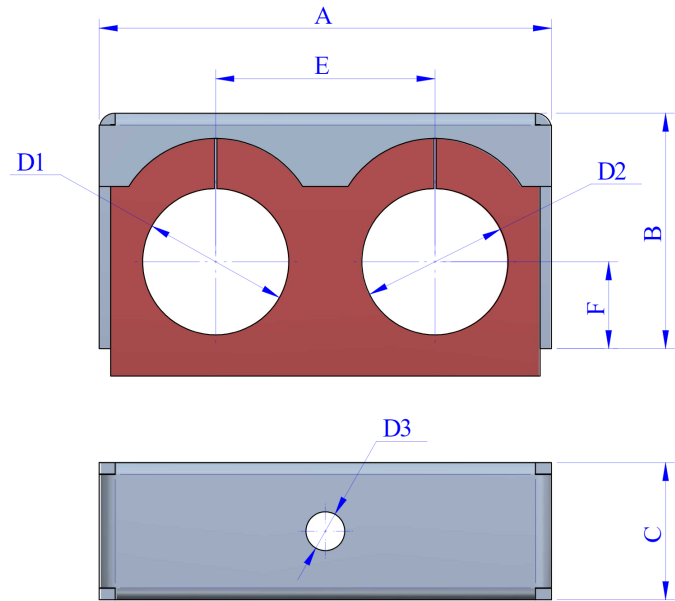


Type	Code	K(N/mm)	A(in)	B(in)	C(in)	E(in)	F(in)	D1	Ext. Diam. pipe D1	D2	Ext. Diam. pipe D2	D3
Type A	23872	84	2.76	1.36	1.14	1.42	0.57	0.59	5/8"	0.71	3/4"	0.33
	23873	100	2.76	1.36	1.14	1.42	0.57	0.71	3/4"	0.71	3/4"	0.33
	23874	76	3.23	1.65	1.14	1.69	0.63	0.83	7/8"	0.96	1"	0.33
	23871	302	2.76	1.36	1.14	1.42	0.51	0.87	7/8"	0.87	7/8"	0.33
	23876	53	3.9	2.03	1.18	1.89	0.83	1.1	1-1/8"	1.1	1-1/8"	0.33
	23875	106	3.9	2.03	1.18	1.89	0.83	1.26	1-3/8"	1.26	1-3/8"	0.33

Type B

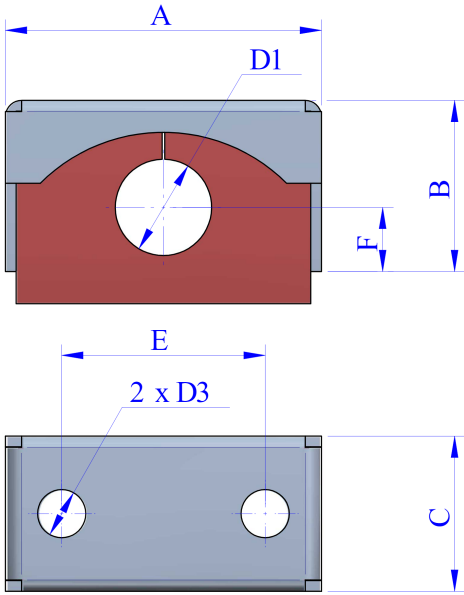


Type	Code	K(N/mm)	A(in)	B(in)	C(in)	E(in)	F(in)	D1	Ext. Diam. pipe D1	D2	D3
Type B	23877	96	2.32	1.26	1.14	1.5	0.47	0.71	3/4"	-	0.35

Type Omega

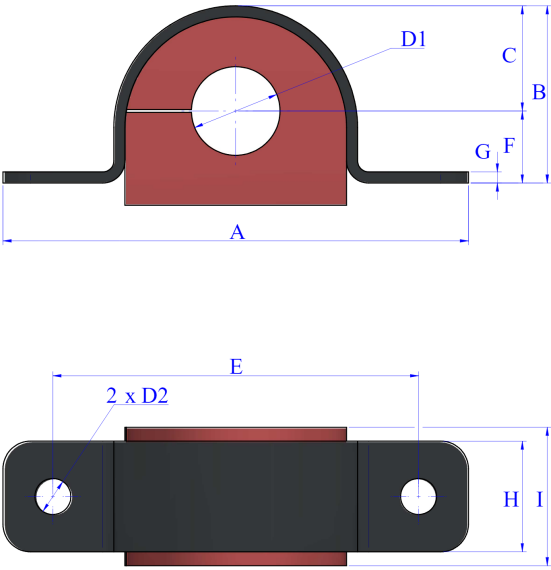

Type	Code	K(N/mm)	A(in)	B(in)	C(in)	E(in)	F(in)	G(in)	H(in)	I(in)	D1	Ext. Diam. pipe D1	D2
Type Omega	23892	28	3.31	1.26	0.75	2.6	0.51	0.08	0.79	0.98	0.39	1/2"	0.26
	23893	54	3.31	1.26	0.75	2.6	0.51	0.08	0.79	0.98	0.55	5/8"	0.26
	23894	43	3.7	1.65	0.94	2.99	0.71	0.08	0.79	0.98	0.79	7/8"	0.26
	23895	61	3.7	1.65	0.94	2.99	0.71	0.08	0.79	0.98	1.02	1-1/8"	0.26
	23896	28	2.72	0.94	0.51	2.01	0.43	0.08	0.79	0.98	0.22	1/4"	0.26
	23897	55	3.31	1.26	0.75	2.6	0.51	0.08	0.79	0.98	0.63	3/4"	0.26
	23898	110	4.09	1.97	1.1	3.39	0.87	0.08	0.79	0.98	1.3	1-3/8"	0.26
	23925	130	5.51	3.03	1.57	4.49	1.46	0.08	1.18	1.18	1.57	1-5/8"	0.32
	23926	203	5.51	3.03	1.57	4.49	1.46	0.08	1.18	1.18	2.05	2-1/8"	0.32

Akustik Pipe Maxi

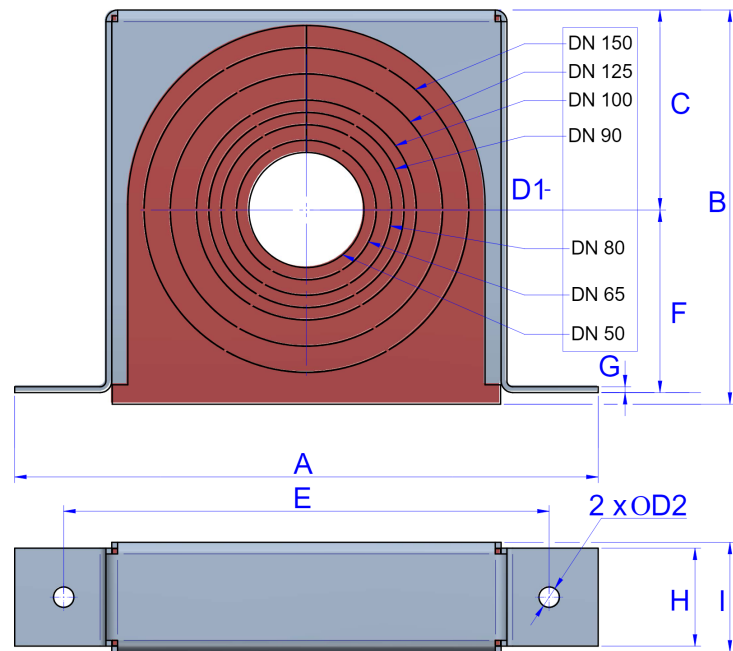

Type	Code	K(N/mm)	A(in)	B(in)	C(in)	E(in)	F(in)	G(in)	H(in)	I(in)	D1	D2
Akustik Pipe Maxi	23839	-	11.83	7.99	3.7	9.84	3.7	0.12	1.99	2.22	DN50 / DN65 / DN80 / DN90 / DN100 / DN125 / DN150	0.41



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13




sales@amcsa.es




www.mecanocaucho.com

Elastic properties

LOAD-DEFLECTION

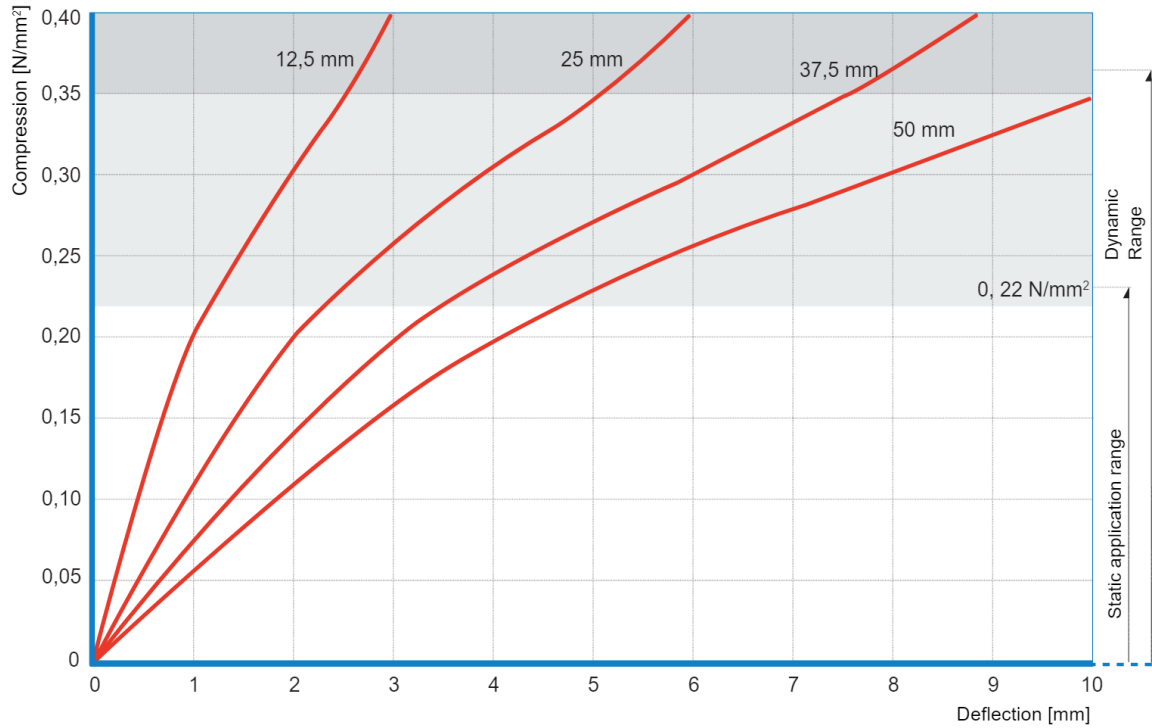

NATURAL FREQUENCY

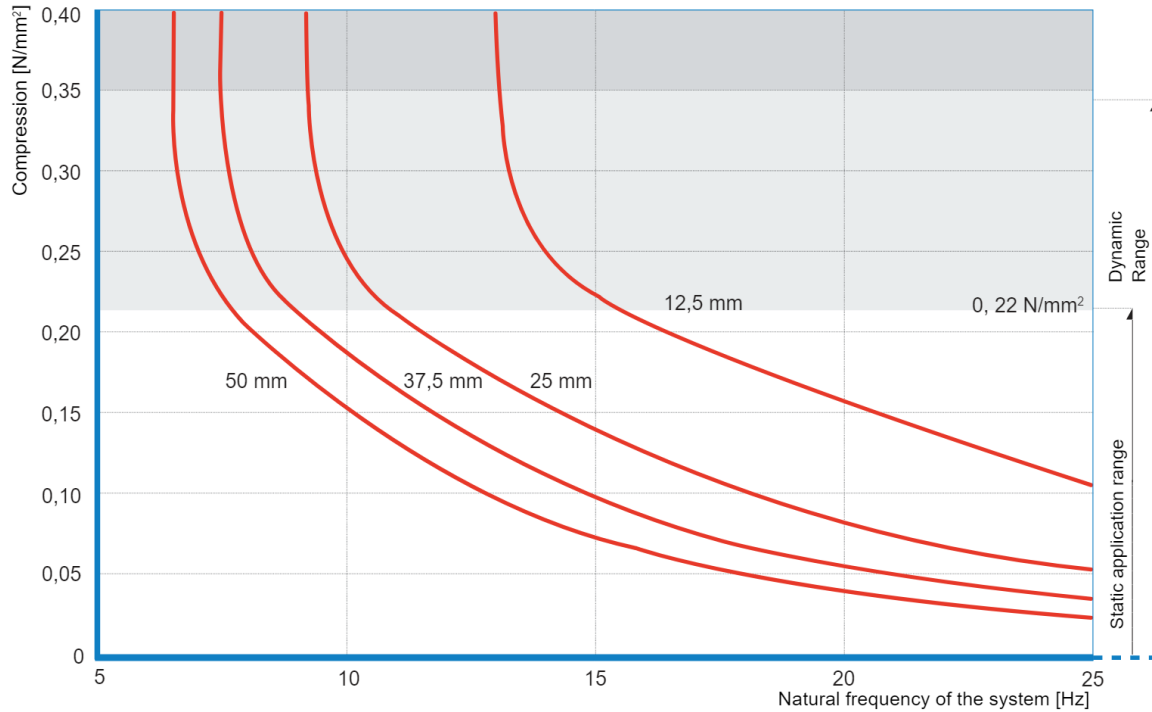

Technical characteristics

- Compact design
- Fail-safe feature
- Multidirectional mount
- Excellent noise isolation
- Corrosion resistant
- Maintenance-free
- No aging