Springtec Super T60

Spring support for ceilings with T-60 profile. Safety guaranteed, even with misaligned profiles. Loads 10–60 kg.




Range designed for suspensions of suspended acoustic ceilings and machinery working at more than 450 r.p.m. Manufactured with piano tail quality spring of great mechanical resistance guided by two rubber plates with integral end stops to prevent contact between spirals when overloading.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Drawings

Springtec Super T-60 Type ST-5 / Springtec Super T-60 Type ST-10 / Springtec Super T-60 Type ST-20 / Springtec Super T-60 Type ST-30 / Springtec Super T-60 Type ST-60

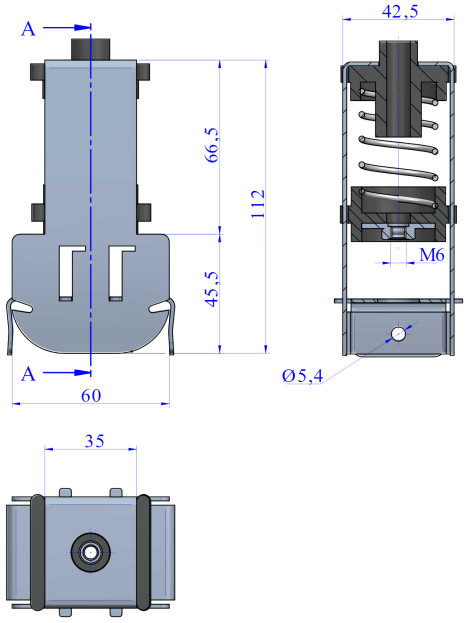


Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec Super T-60 Type ST-5	5	Silver	23427	0.242
Springtec Super T-60 Type ST-10	10	White	23351	0.242
Springtec Super T-60 Type ST-20	20	Yellow	23352	0.242
Springtec Super T-60 Type ST-30	30	Blue	23353	0.236
Springtec Super T-60 Type ST-60	60	Magenta	23354	0.264

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Elastic properties

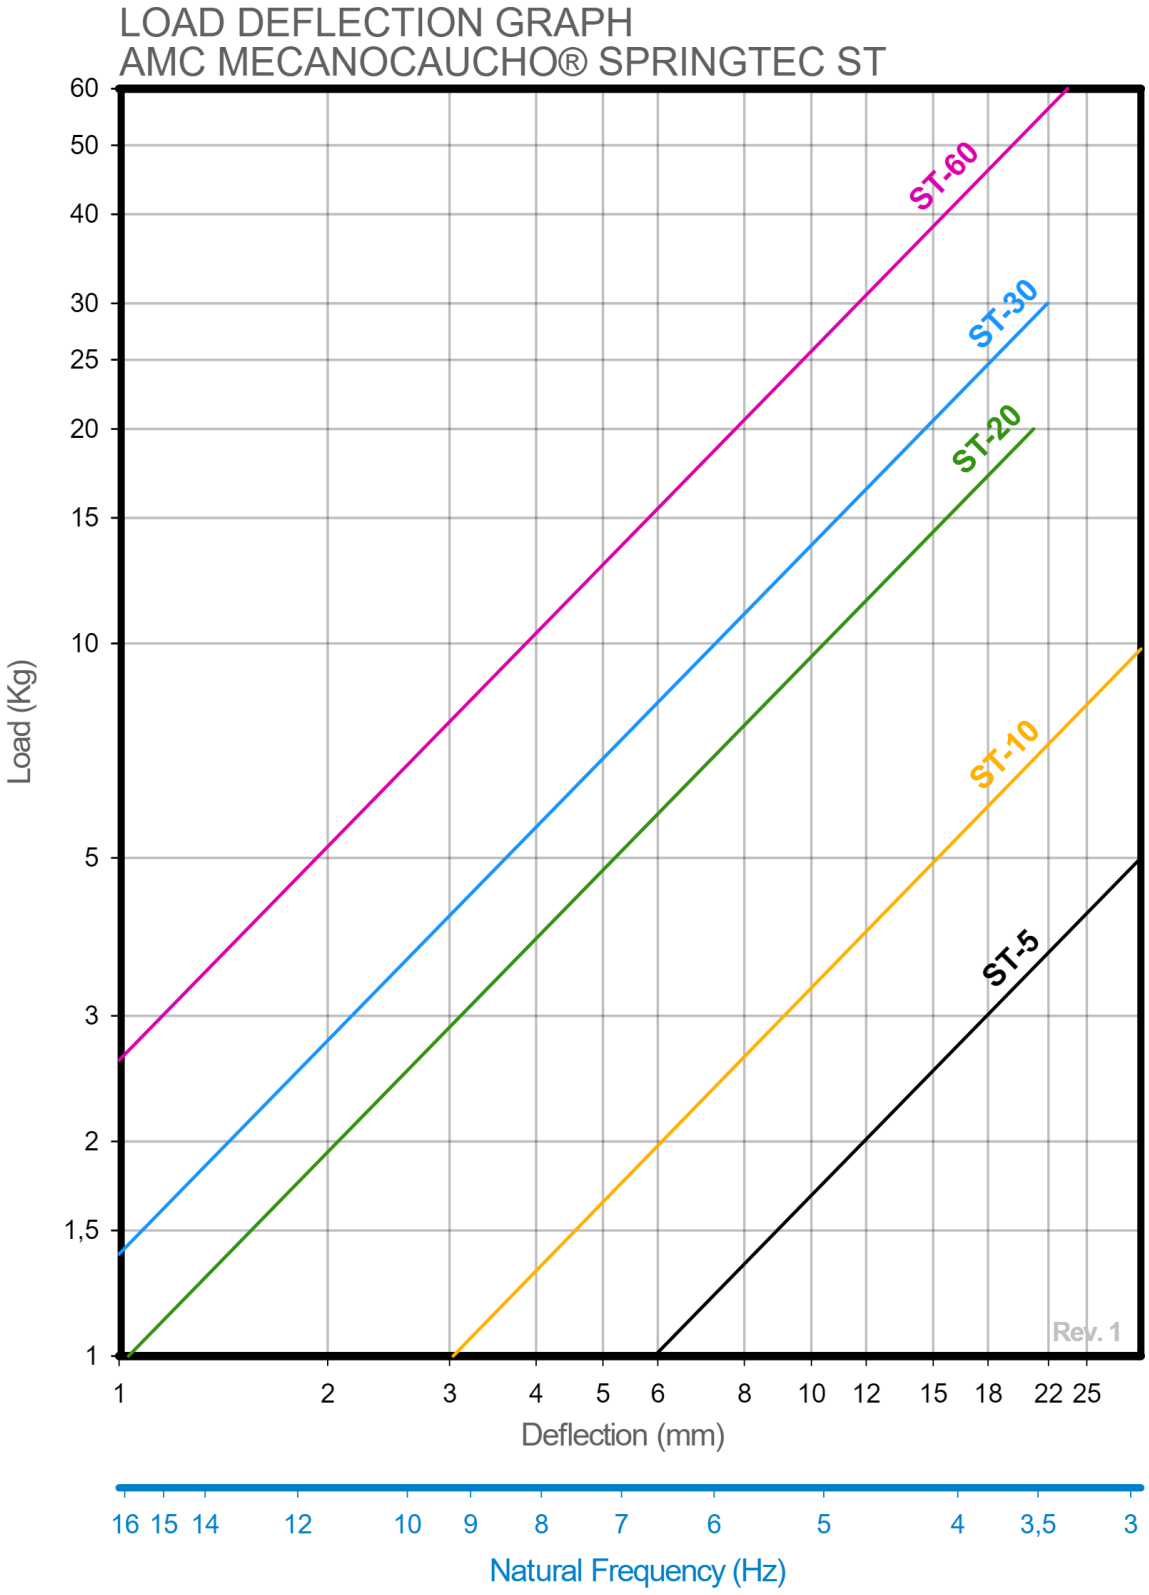

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

Secure ceiling anchorage

With more than one fixing point to the overhead slab, it is particularly reliable for anchorages with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.