

Springtec Super T60

Spring support for ceilings with T-60 profile. Safety guaranteed, even with misaligned profiles. Loads 10–60 kg.




Range designed for suspensions of suspended acoustic ceilings and machinery working at more than 450 r.p.m. Manufactured with piano tail quality spring of great mechanical resistance guided by two rubber plates with integral end stops to prevent contact between spirals when overloading.




Drawings

Springtec Super T-60 Type ST-5 / Springtec Super T-60 Type ST-10 / Springtec Super T-60 Type ST-20 / Springtec Super T-60 Type ST-30 / Springtec Super T-60 Type ST-60

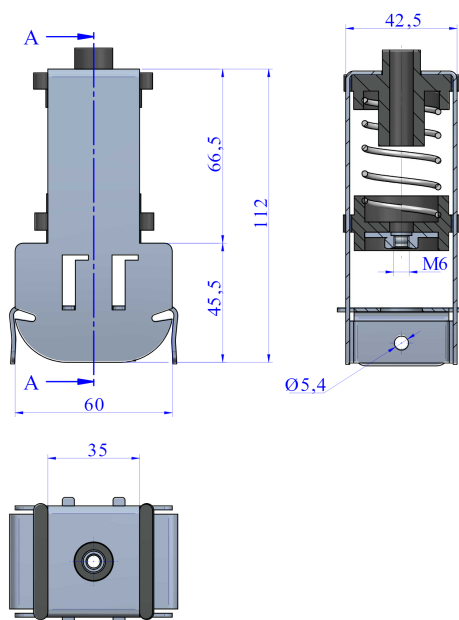

Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec Super T-60 Type ST-5	5	Silver	23427	0.242
	Springtec Super T-60 Type ST-10	10	White	23351
	Springtec Super T-60 Type ST-20	20	Yellow	23352
	Springtec Super T-60 Type ST-30	30	Blue	23353
	Springtec Super T-60 Type ST-60	60	Magenta	23354

Elastic properties

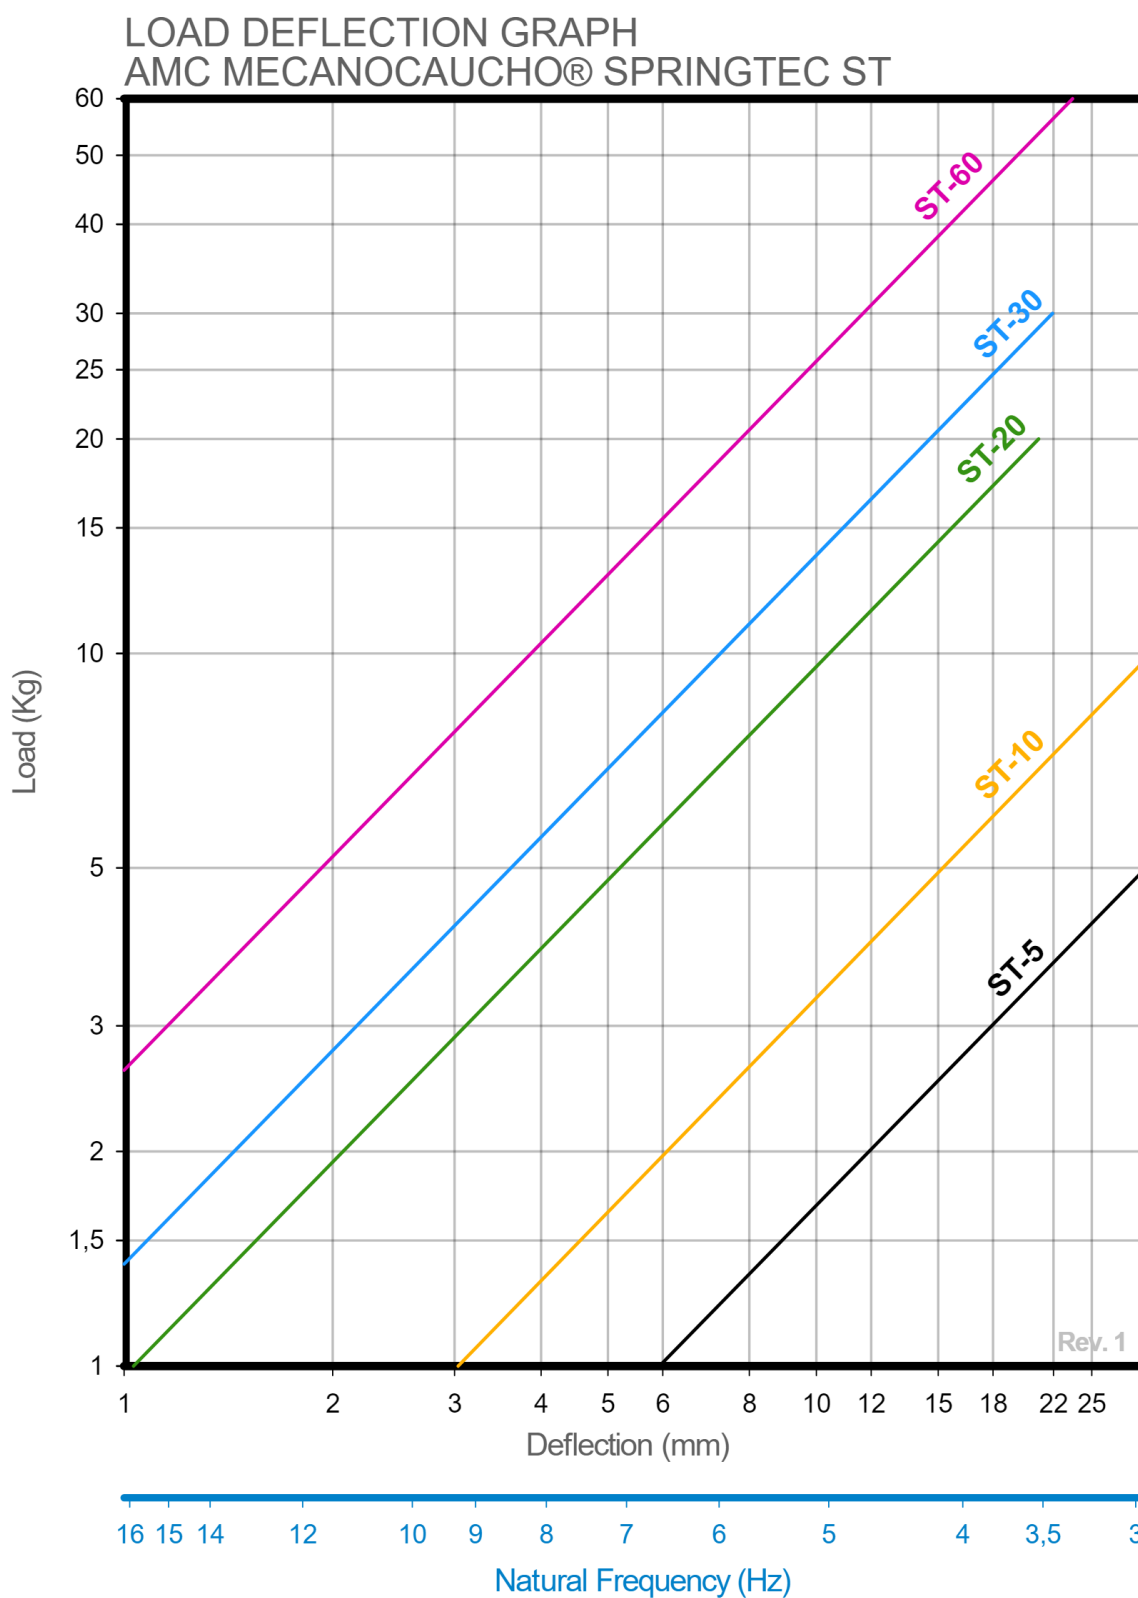

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com