Akustik +Sylomer® WF

Compact Sylomer® anti-vibration mount for lightweight equipment, designed to work in tension, compression and shear, with a fail-safe design.



The **Akustik + Sylomer® WF** mounts are designed for the **resilient isolation of lightweight equipment**, reducing the transmission of vibration and **structure-borne noise** into the building structure.

The **Sylomer® resilient element** allows the mount to work in **tension, compression and shear**, providing considerable flexibility for different installation arrangements. It is particularly suitable for the suspension or mounting of **loudspeakers, electrical panels, HVAC equipment, fans, pipework and lightweight ductwork**.


Its metal structure incorporates a **fail-safe design** that limits excessive movement of the equipment and provides additional mechanical safety. Its **compact design** makes it particularly suitable for installations where available space is limited.


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

Akustik + Sylomer WF 5 / Akustik + Sylomer WF 10 / Akustik + Sylomer WF 15

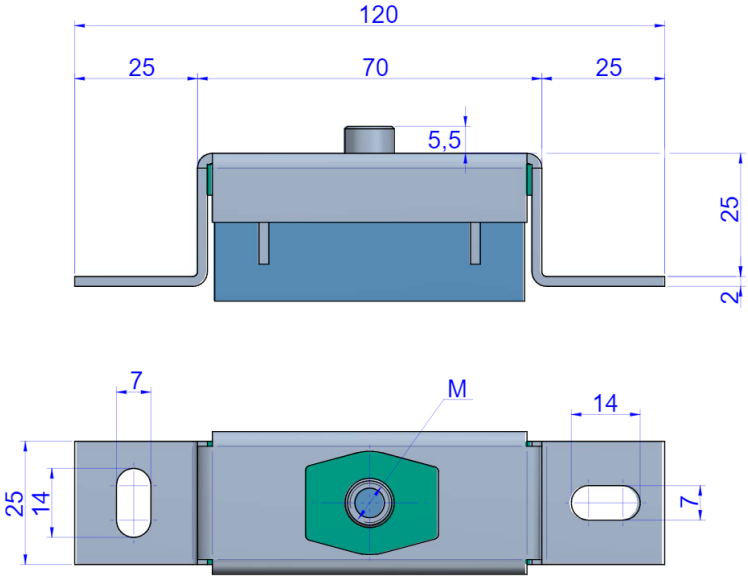

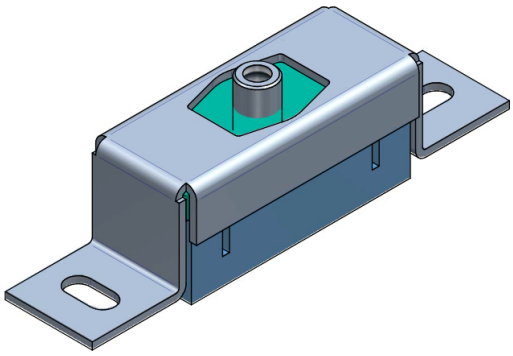


Contact the technical department to select the suitable mount for your case.


Type	Max. Load(kg)	Code	M	Weight(gr)
Akustik + Sylomer WF 5	2.5-5	23805	M6	119
		23806	M8	119
Akustik + Sylomer WF 10	5-10	23807	M6	124
		23808	M8	124
Akustik + Sylomer WF 15	10-15	23809	M6	127
		23810	M8	127

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Elastic properties

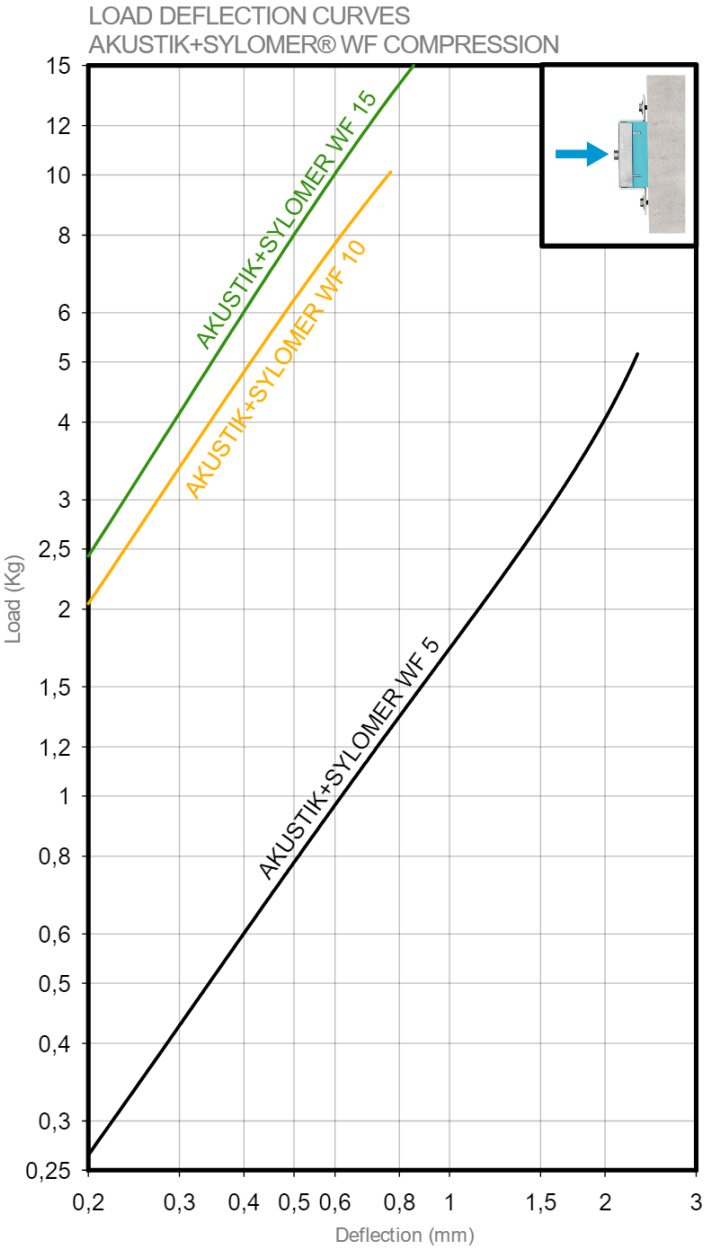

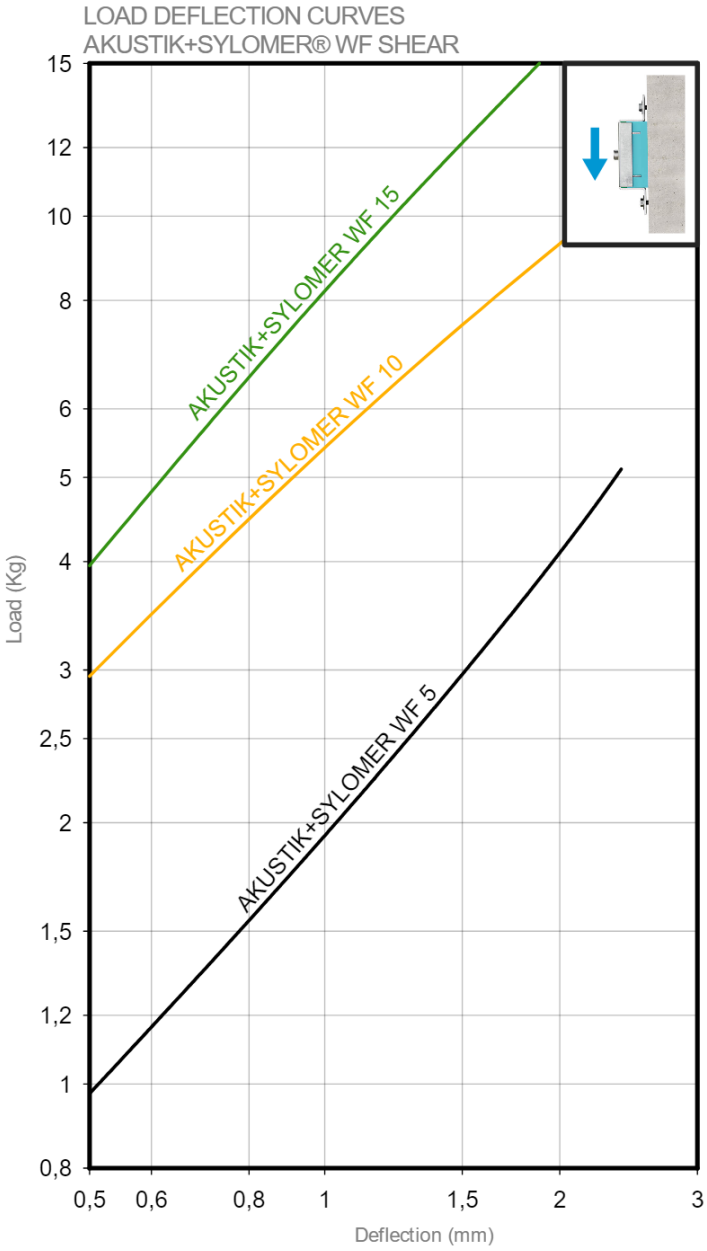

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Technical characteristics

Contact the technical department to select the suitable mount for your case.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Mount offering high stability

Suspensions built with this mount barely move, thanks to a geometry designed to control the movement of the suspended element.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.