

Hi Sec

Sistema di regolazione dell'altezza rinforzato con dado centrale sovradimensionato, ideale per motori propulsori. Supporta spinte e vibrazioni con zincatura anticorrosiva.




Questo sistema di regolazione dell'altezza viene zincato e cromato secondo la norma DIN 50691/ISO 2081 per proteggerlo dalla corrosione.



Disegni

HI SEC

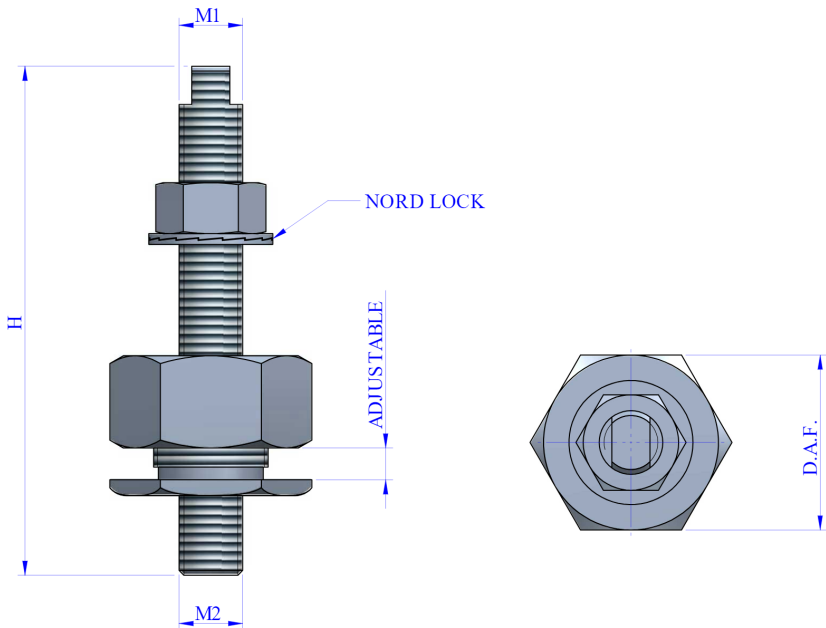

Tipo	Codice	M1	M2	Adjustable(mm)	H(mm)	Machine Head	D.A.F.(mm)	Peso(gr)
HI SEC	708077	M16	M12	+ 5	110	Y	46	357
	708007	M16	M16	+ 5	110	Y	46	490
	708094	M20	M20	+ 5	130	N	46	775
	708079	M20	M16	+ 10	150	Y	55	1095
	708029	M20	M20	+ 10	160	Y	55	1011
	708005	M20	M20	+ 10	160	N	55	1100
	708011	M24	M24	+ 10	200	N	120	3500

Caratteristiche tecniche

DNV rules for ships/ High Speed light craft, Issue Jan 2016 Point 4 Chapter 3 Section1 F202, establishes that standard height adjusters are not acceptable for leveling, due to cyclic bending moments that the studs and bolts are subjected to. This is the reason why leveling of mounts using shims beneath the mounts is the only recommended method for leveling.

AMC-MECANOCAUCHO shares also this method and that is the reason why AMC-MECANOCAUCHO® **Shims** have been developed. In order to achieve a fine leveling **HI-SEC height adjusters** allow a final precise adjusting with security.