3 AMC Spring Isolator

Three-spring isolator for static installations, designed for machinery vibration isolation, with natural frequencies from 3.5 to 8 Hz and a rubber or Sylomer® base.



The **AMC-MECANOCAUCHO® 3 AMC Spring Isolator** is designed for the **vibration isolation of machinery and equipment incorporating rotating or reciprocating components**, which may generate dynamic forces and vibration during operation.

Its **three steel spring configuration** provides a **high load capacity** while maintaining the high elasticity required for effective vibration isolation.

The high elasticity of the springs enables **natural frequencies from 3.5 to 8 Hz**, effectively reducing the transmission of low-frequency vibration and dynamic forces to the supporting structure.

Reducing vibration transmission helps **protect the machine and its components against dynamic stresses and fatigue**, while limiting the propagation of vibration and **structure-borne noise** to adjacent structures.


Depending on the configuration, the spring isolator can incorporate a **rubber or Sylomer® base**, improving decoupling from the supporting structure and further reducing the transmission of frequencies that may propagate through the steel springs.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Drawings

3 AMC + Sylomer®

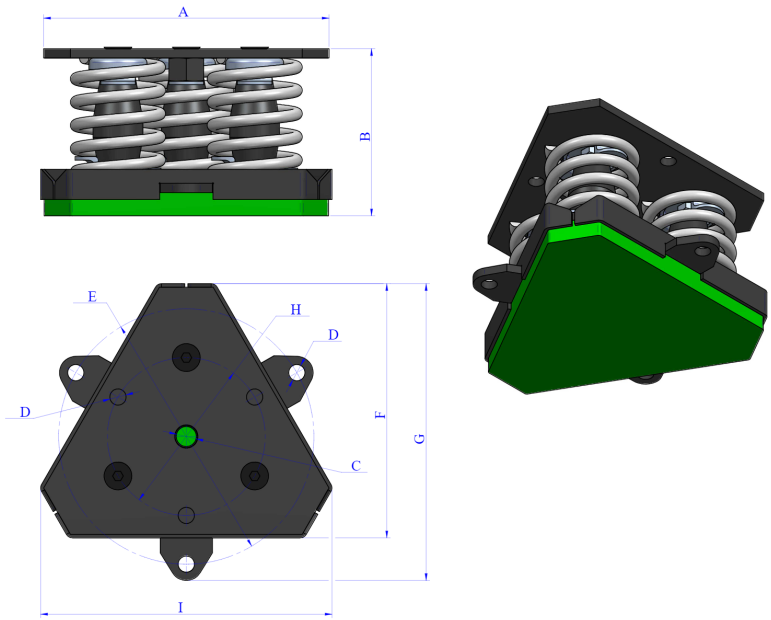


Type	Code	Spring color	Max. Load (lbs)	K(N/mm)	A(in)	B(in)	C(in)	D(in)	E(in)	F(in)	G(in)	H(in)	I(in)	Weight(lbs)
3 AMC + Sylomer®	20571	BLUE	992	155	7.73	5.35	M-16	0.47	7.09	6.93	8.18	4.33	7.93	10
	20572	WHITE	1322	198	7.73	5.35	M-16	0.47	7.09	6.93	8.18	4.33	7.93	10
	20573	BLACK	1653	248	7.73	5.35	M-16	0.47	7.09	6.93	8.18	4.33	7.93	11
	20574	CREAM	2314	341	7.73	5.35	M-16	0.47	7.09	6.93	8.18	4.33	7.93	12
	20575	LIGHT GREY	3306	804	9.69	5.35	M-20	0.55	8.66	8.62	10.07	5.35	9.88	19
	20576	GREEN	4959	1220	9.69	5.35	M-20	0.55	8.66	8.62	10.07	5.35	9.88	22

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

3 AMC

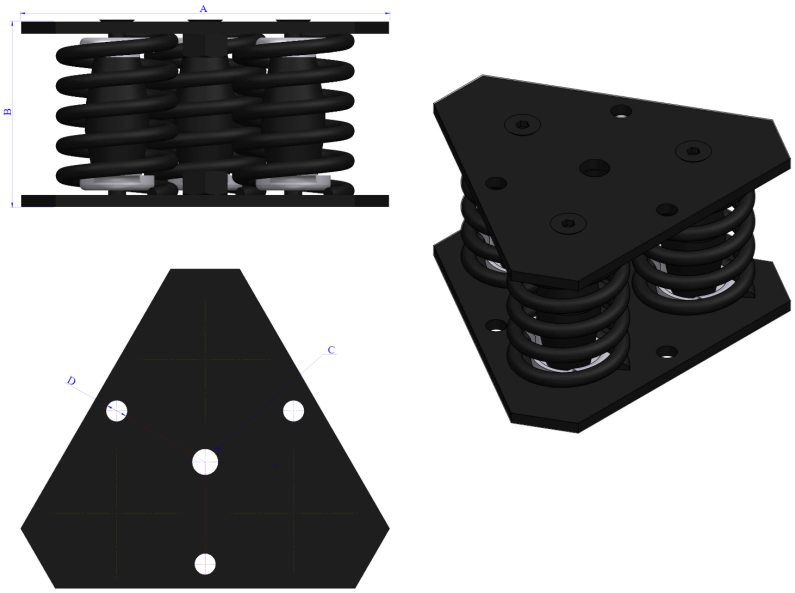


Type	Code	Spring color	Max. Load (lbs)	K(N/mm)	A(in)	B(in)	C(in)	D(in)	E(in)	F(in)	G(in)	H(in)	I(in)	Weight(lbs)
3 AMC	20501	BLUE	992	155	7.73	4.88	M-16	0.47	-	-	-	-	-	10
	20511	WHITE	1322	198	7.73	4.88	M-16	0.47	-	-	-	-	-	10
	20521	BLACK	1653	248	7.73	4.88	M-16	0.47	-	-	-	-	-	11
	20531	CREAM	2314	341	7.73	4.88	M-16	0.47	-	-	-	-	-	12
	20541	LIGHT GREY	3306	804	9.53	4.88	M-20	0.55	-	-	-	-	-	19
	20551	GREEN	4959	1220	9.53	4.88	M-20	0.55	-	-	-	-	-	22

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Elastic properties

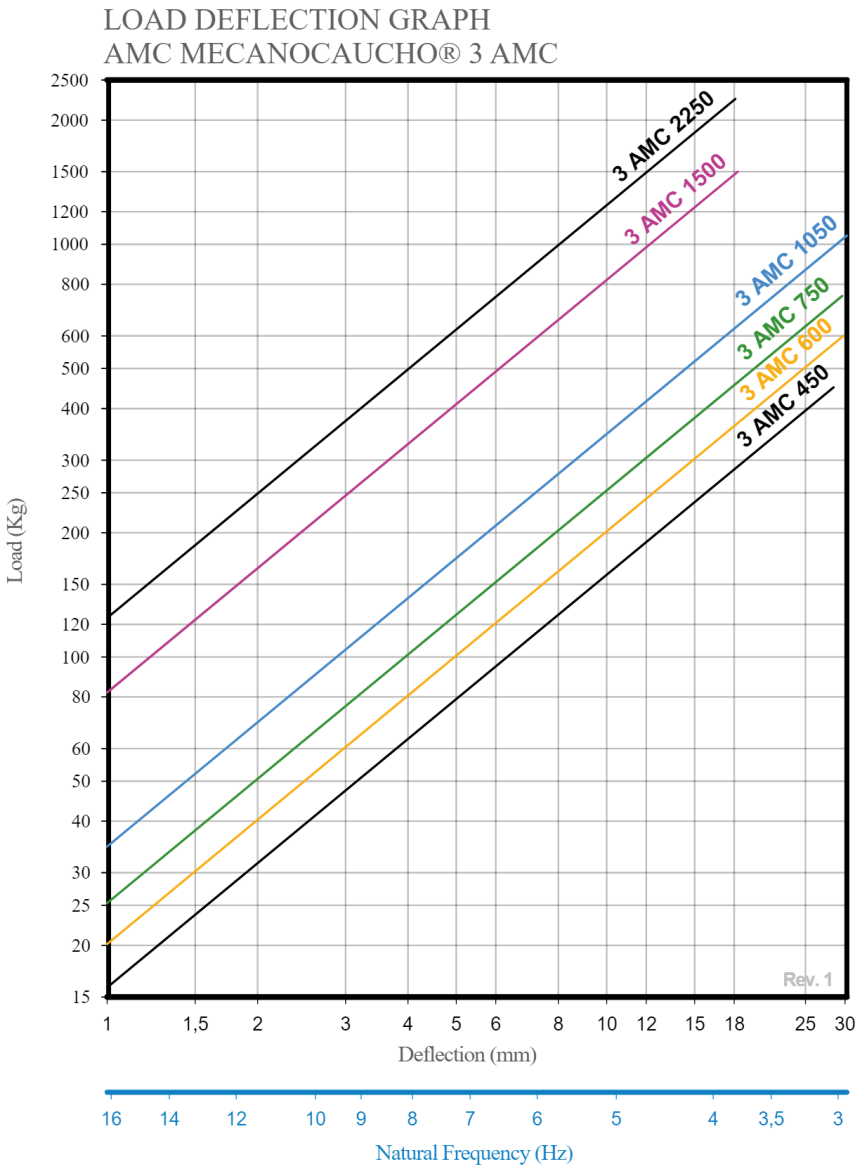

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Improved isolation

It offers improved isolation compared to conventional anti-vibration mounts of similar geometry.

Excellent value

This mount delivers very high performance for its cost compared to other possible solutions.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.