

5 AMC Spring Mount

Five-spring mount for static installations, designed for machinery vibration isolation, with natural frequencies from 3.5 to 8 Hz and a rubber or Sylomer® base.



The **AMC-MECANOCAUCHO® 5 AMC Spring Mount** is designed for the **vibration isolation of machinery and equipment incorporating rotating or reciprocating components**, which may generate dynamic forces and vibration during operation.

Its **five steel spring configuration** provides a **high load capacity** whilst maintaining the high elasticity required for effective vibration isolation.

The high elasticity of the springs enables **natural frequencies from 3.5 to 8 Hz**, effectively reducing the transmission of low-frequency vibration and dynamic forces to the supporting structure.


Reducing vibration transmission helps **protect the machine and its components against dynamic stresses and fatigue**, whilst limiting the propagation of vibration and **structure-borne noise** to adjacent structures.

Depending on the configuration, the spring mount can incorporate a **rubber or Sylomer® base**, improving decoupling from the supporting structure and further reducing the transmission of frequencies that may propagate through the steel springs.




Drawings

5 AMC + Sylomer®

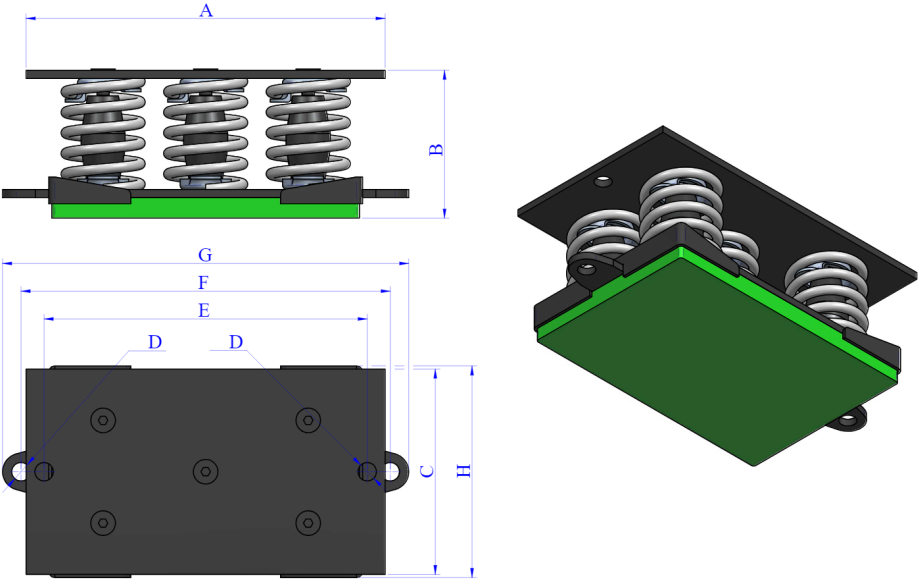


Type	Code	Spring color	Max. Load (kg)	K(N/mm)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	Weight(kg)
5 AMC + Sylomer®	20771	BLUE	750	259	280	136	150	16	251	290	322	156	8.502
	20772	WHITE	1000	330	280	136	150	16	251	290	322	156	8.692
	20773	BLACK	1250	414	280	136	150	16	251	290	322	156	9.162
	20774	CREAM	1750	568	280	136	150	16	251	290	322	156	10.037
	20775	LIGHT GREY	2500	1341	350	136	200	18	315	360	396	206	15.716
	20776	GREEN	3750	2033	350	136	200	18	315	360	396	206	18.056

5 AMC

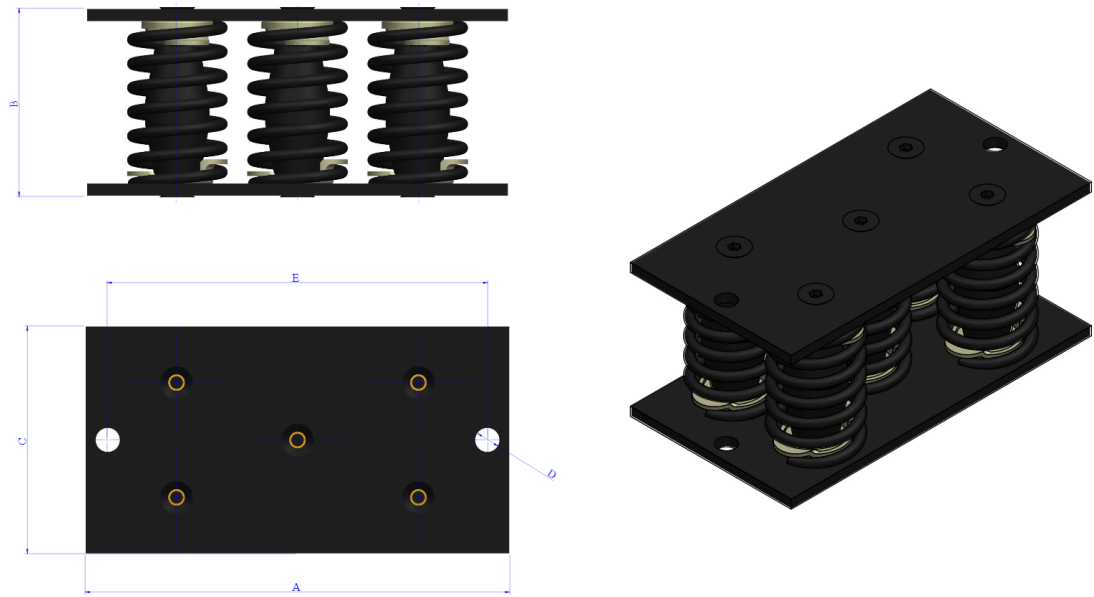

Type	Code	Spring color	Max. Load (kg)	K(N/mm)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	Weight(kg)
5 AMC	20701	BLUE	750	259	280	124	150	16	251	-	-	-	8.502
	20711	WHITE	1000	330	280	124	150	16	251	-	-	-	8.692
	20721	BLACK	1250	414	280	124	150	16	251	-	-	-	9.162
	20731	CREAM	1750	568	280	124	150	16	251	-	-	-	10.037
	20741	LIGHT GREY	2500	1341	350	124	200	18	315	-	-	-	15.716
	20751	GREEN	3750	2033	350	124	200	18	315	-	-	-	18.056

Elastic properties

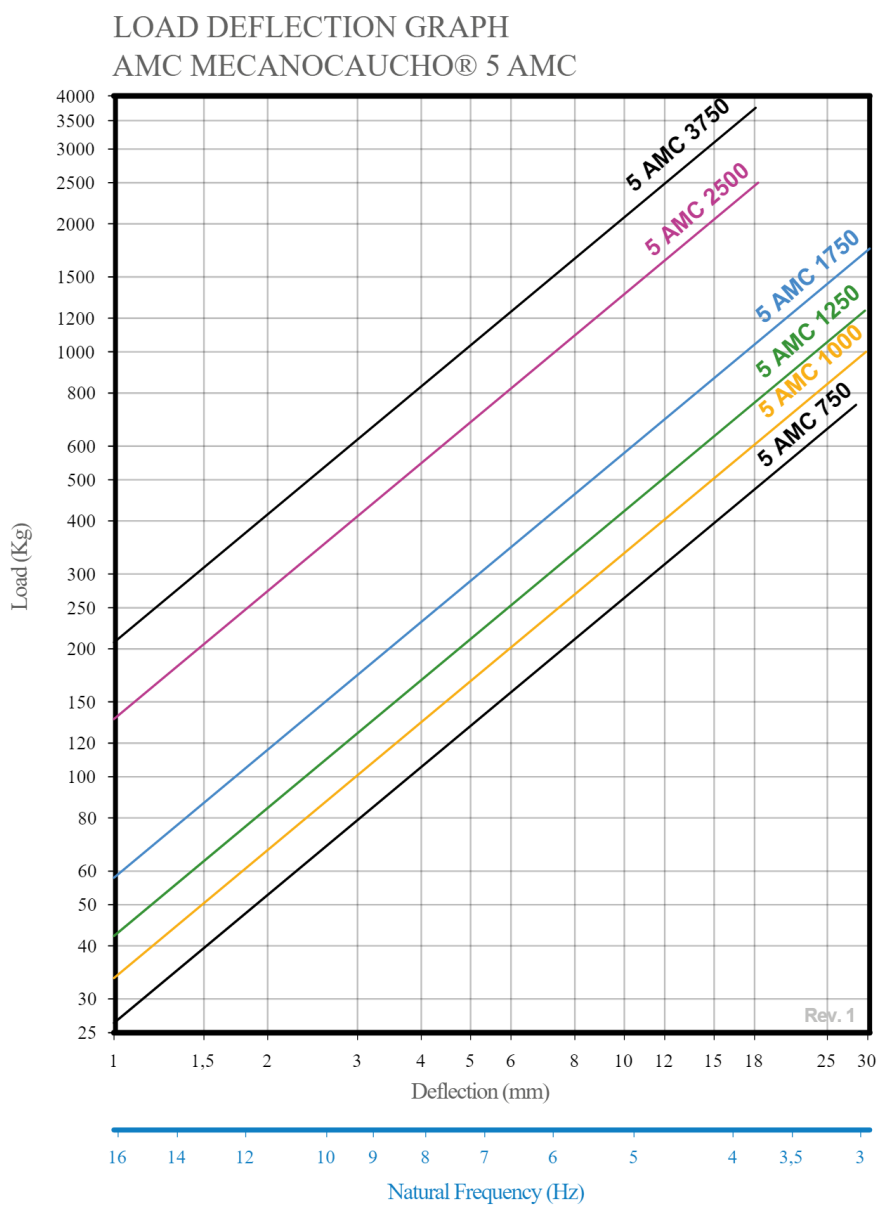

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com

