


Akustik 1 Low + Sylomer® Acoustic Hanger

Low-profile acoustic hanger with Sylomer® for suspended ceilings.
Compact design for applications with limited installation height.

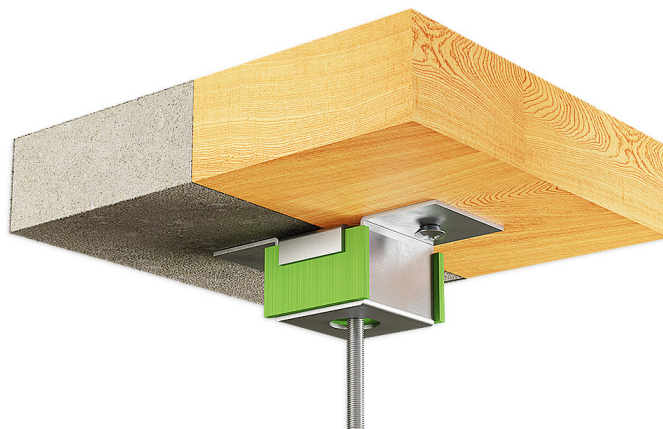

The Akustik 1 Low + Sylomer® acoustic hanger is specifically designed for the vibration isolation of suspended ceilings where the available installation height is limited.


Its low-profile design minimises the space required between the supporting structure and the suspended ceiling while maintaining effective vibration isolation. The Sylomer® elastic element effectively reduces the transmission of vibration and structure-borne noise through the building structure.

It is particularly suitable for projects requiring a minimal suspension height without compromising acoustic performance.



Drawings





Akustik 1 Low + Sylomer®15 Type A / Akustik 1 Low + Sylomer®30 Type A / Akustik 1 Low + Sylomer®50 Type A / Akustik 1 Low + Sylomer®75 Type A

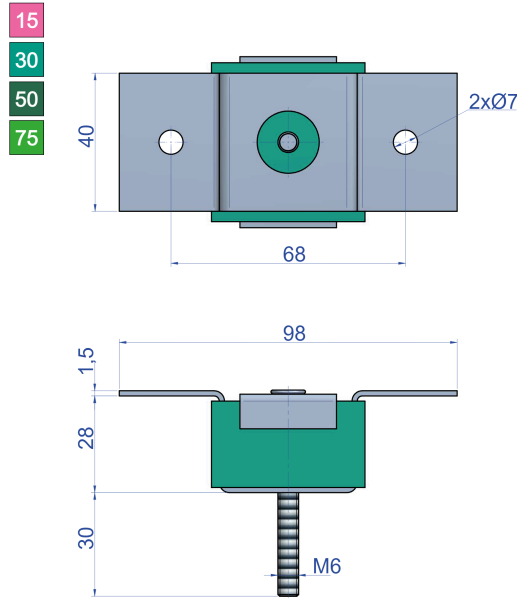





Type	Max.Load (kg)	Code	Weight(kg)
Akustik 1 Low + Sylomer®15 Type A	15	23773	0.12
Akustik 1 Low + Sylomer®30 Type A	30	23771	0.105
Akustik 1 Low + Sylomer®50 Type A	50	23774	0.125
Akustik 1 Low + Sylomer®75 Type A	75	23772	0.13

Elastic properties

LOAD DEFLECTION GRAPHS

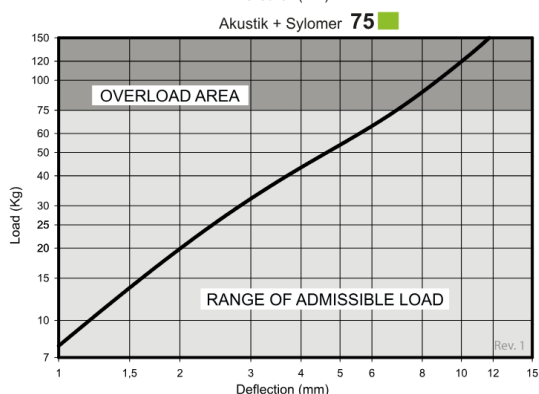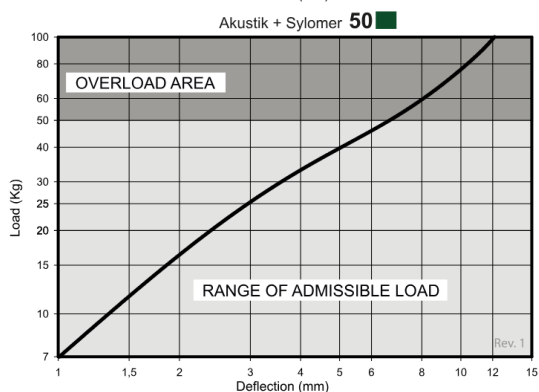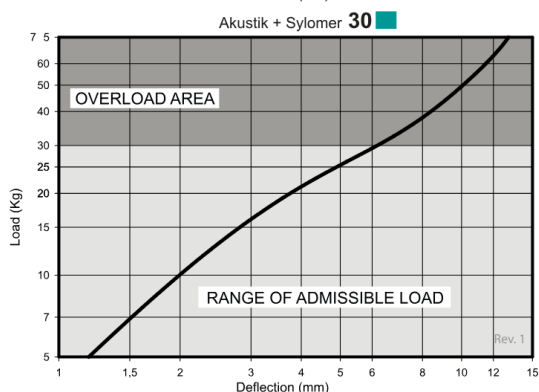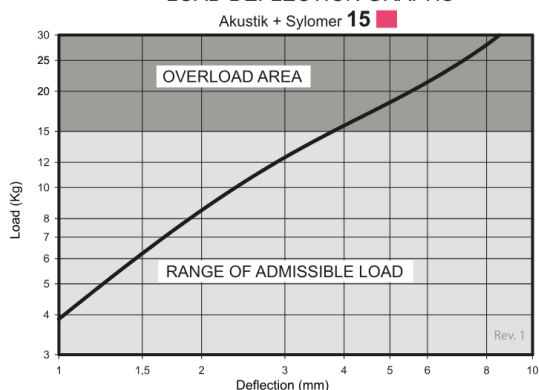

NATURAL FREQUENCY GRAPHS

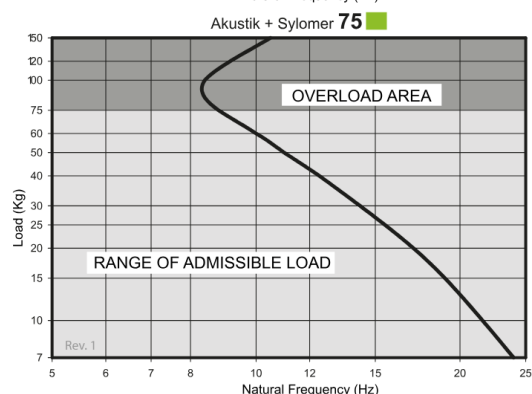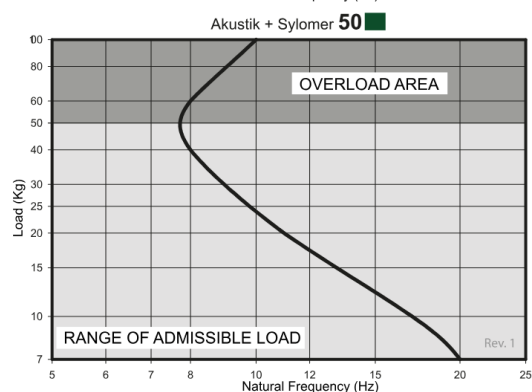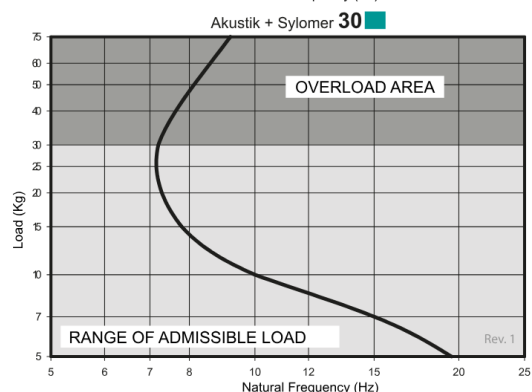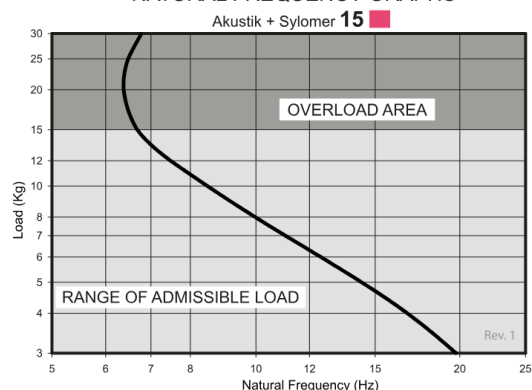

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com