

Akustik 1 Nonius +Sylomer®

Support with double anchoring and Nonius system. Effective insulation with stable adjustment for professional acoustic ceilings.




These **acoustic hangers** have been conceived for the suspension of false ceilings, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcellular polyurethane material achieve elevated isolation values as opposed to other mounts that use rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.



A great variety of fixing metal armors and elements facilitate the installation and to adapt better to each type of job. Their rugged metal parts can withstand tensile stresses from 650Kg to 1000Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

Drawings

Akustik 1 Nonius + Sylomer®15 / Akustik 1 Nonius + Sylomer®30 / Akustik 1 Nonius + Sylomer®50






DIN 11024 R-CLIP
INCLUDED

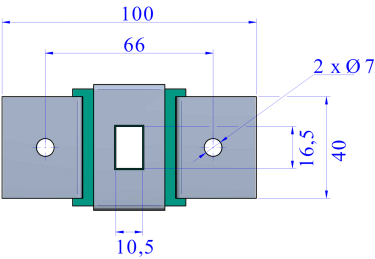




Type	Code
Akustik 1 Nonius + Sylomer®15	23669
Akustik 1 Nonius + Sylomer®30	23671
Akustik 1 Nonius + Sylomer®50	23673

Elastic properties

LOAD DEFLECTION GRAPHS

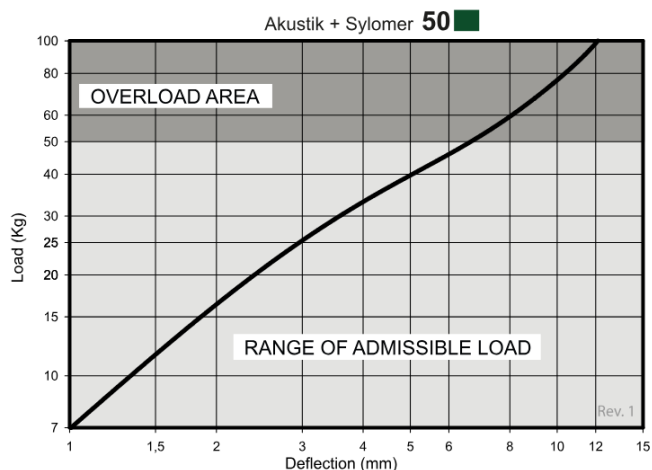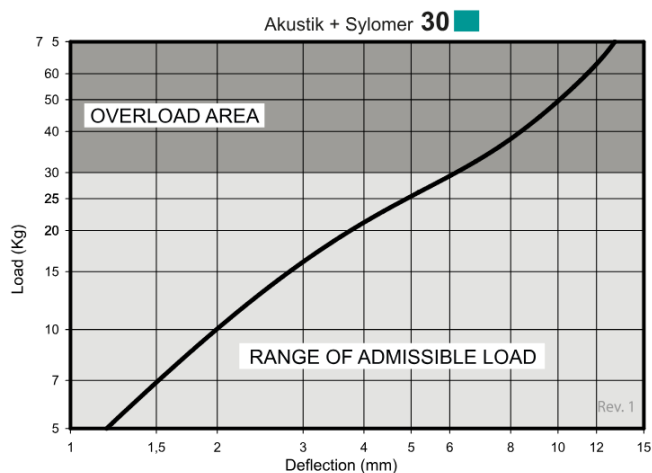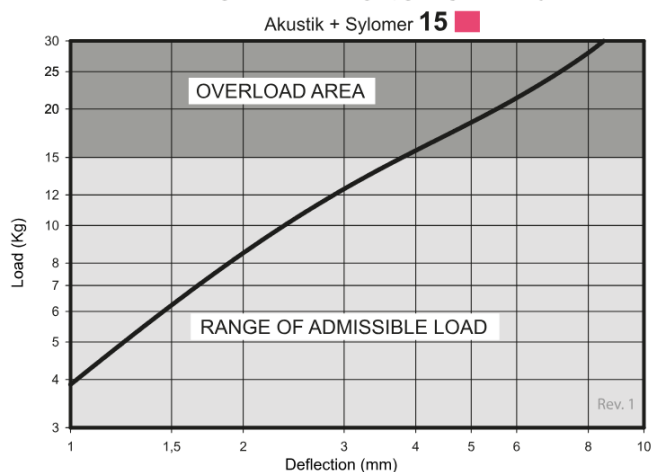

NATURAL FREQUENCY GRAPHS

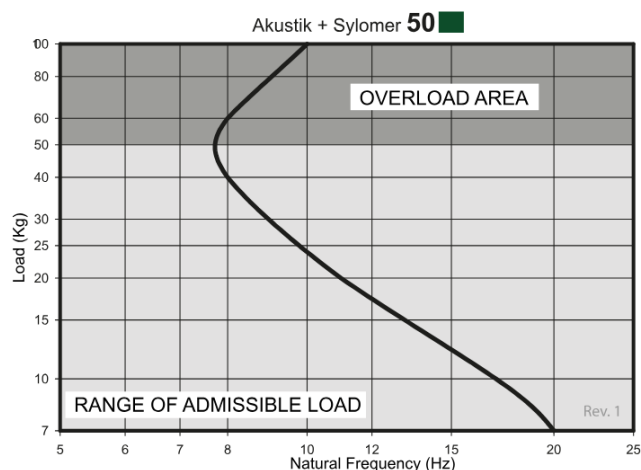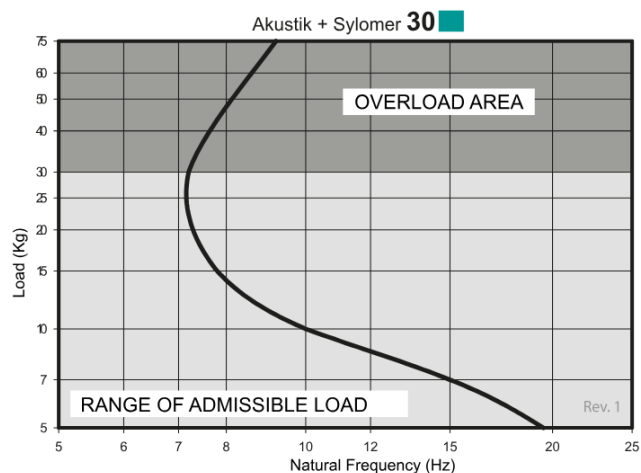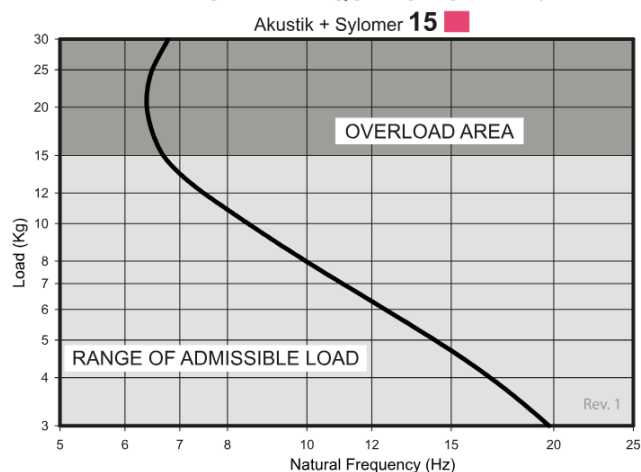

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com