
Akustik 1 +Sylomer®

Acoustic hanger with Sylomer®, double fixing, and omega opening for threaded rods. Ideal for suspended ceilings with limited anchor capacity.

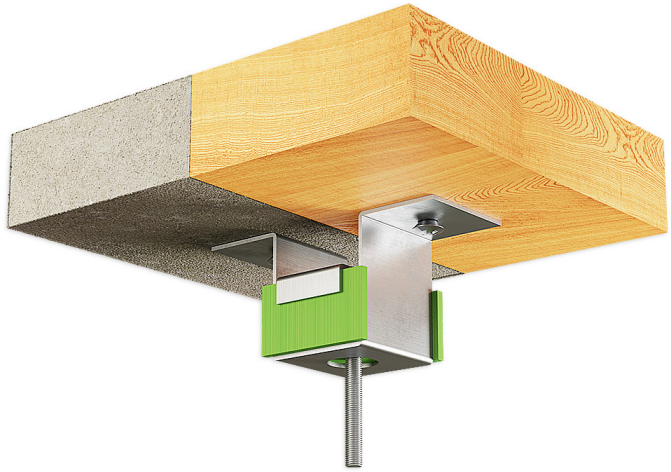

The Akustik 1 + Sylomer® range is designed for the suspension of acoustic ceilings, vibrating piping, and suspended machinery.

The integrated Sylomer® microcellular polyurethane element provides outstanding vibration isolation, particularly at low frequencies, delivering higher isolation performance than conventional rubber or cork isolators. Two Sylomer® grades are available to optimise performance across different load ranges.

The **double fixing and omega opening for threaded rods** provide flexible and secure installation. The acoustic hanger is available with **M6 or M8 threads**, allowing it to be adapted to different fixing and installation requirements.


A wide range of fixing accessories allows the system to adapt to different installation requirements. The heavy-duty steel housing is designed to withstand tensile loads from 650 to 1,000 kg and is protected with a corrosion-resistant zinc-plated finish for long-term durability.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Drawings

Akustik 1 + Sylomer®15 Type A / Akustik 1 + Sylomer®30 Type A / Akustik 1 + Sylomer®50 Type A / Akustik 1 + Sylomer®75 Type A

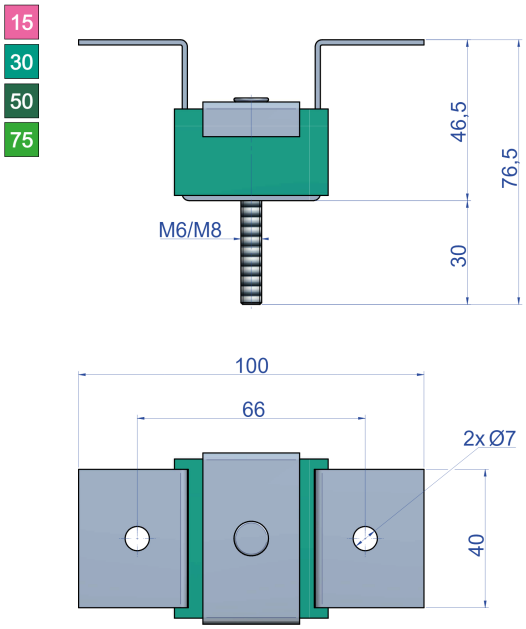



Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 1 + Sylomer®15 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	15	23651	M6	0.133
			23699	M8	0.141
Akustik 1 + Sylomer®30 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	30	23501	M6	0.133
			23700	M8	0.144
Akustik 1 + Sylomer®50 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	50	23502	M6	0.133
			23272	M8	0.133
Akustik 1 + Sylomer®75 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes	75	23517	M6	0.146
			23273	M8	0.146

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Akustik 1 + Sylomer®15 Type B / Akustik 1 + Sylomer®30 Type B / Akustik 1 + Sylomer®50 Type B / Akustik 1 + Sylomer®75 Type B

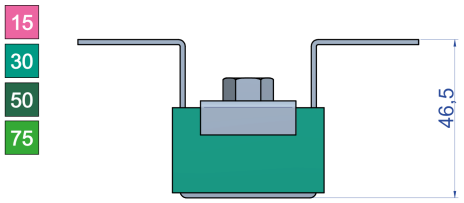

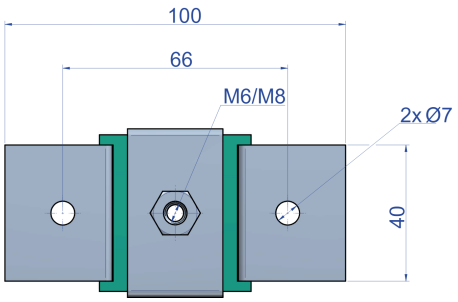

Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 1 + Sylomer®15 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	15	23652	M6	0.125
			23653	M8	0.125
Akustik 1 + Sylomer®30 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	30	23509	M6	0.125
			23603	M8	0.125
Akustik 1 + Sylomer®50 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	50	23520	M6	0.125
			23880	M8	0.125
Akustik 1 + Sylomer®75 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	75	23525	M6	0.134
			23604	M8	0.12


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

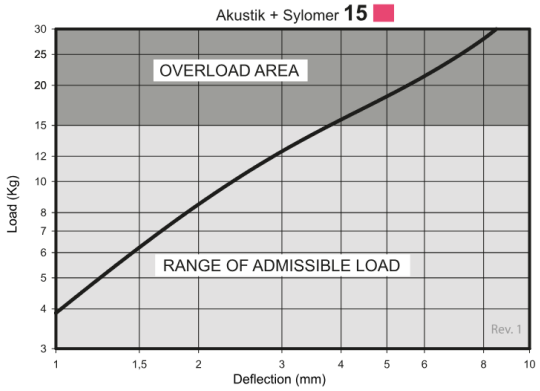


Akustik + Sylomer **30**

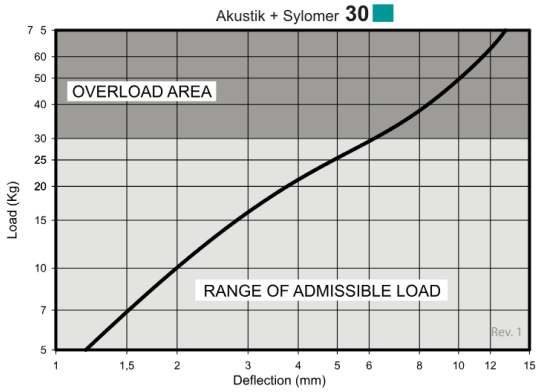

Akustik + Sylomer **50**

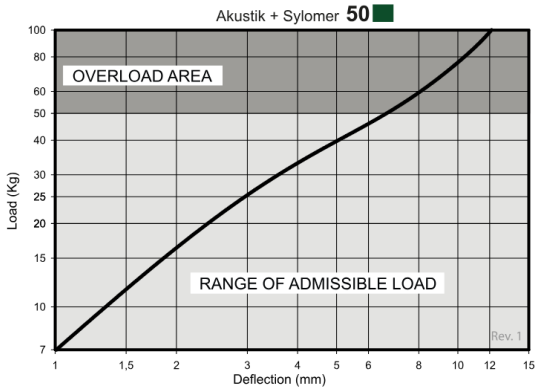


Akustik + Sylomer **75**

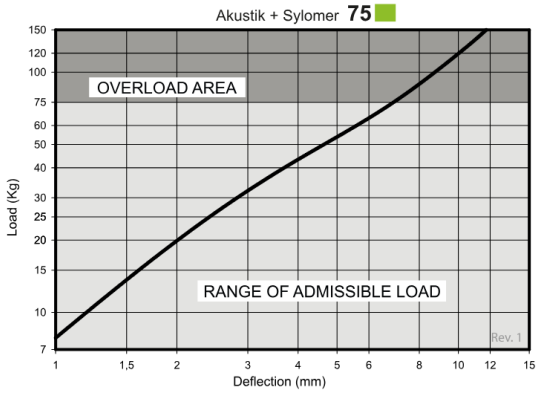


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

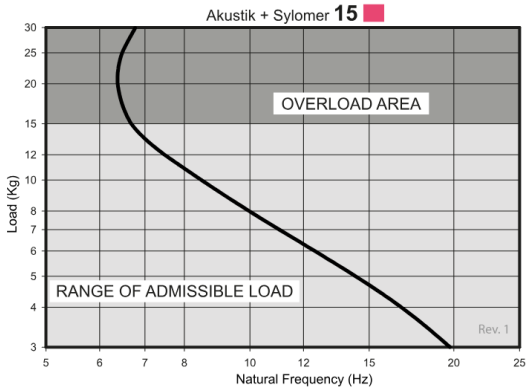


Akustik + Sylomer **30**

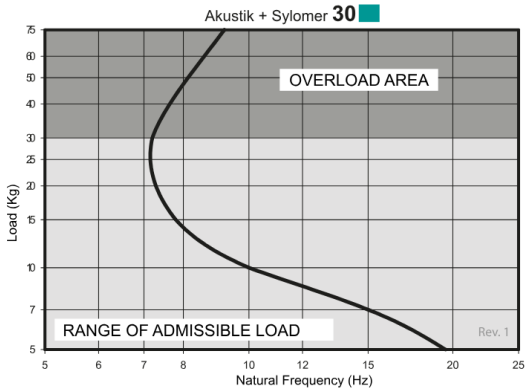

Akustik + Sylomer **50**

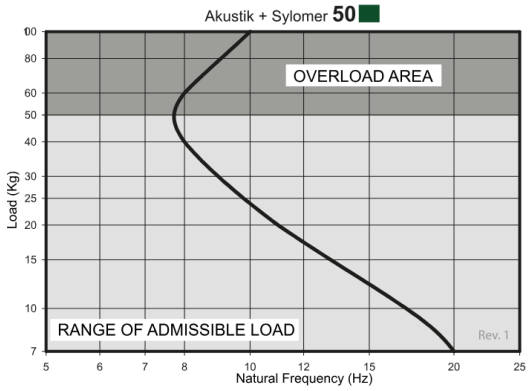

Akustik + Sylomer **75**

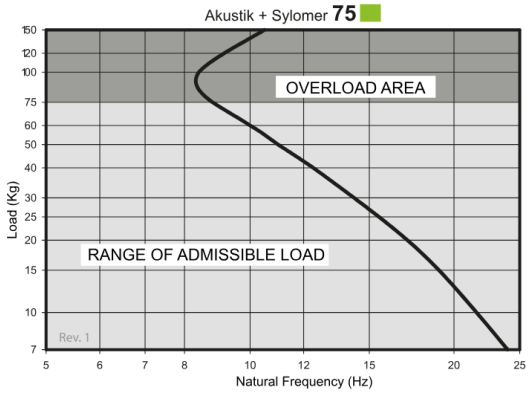

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Secure ceiling anchorage

With more than one fixing point to the overhead slab, it is particularly reliable for anchorages with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.