


Akustik 1 +Sylomer®

Acoustic hanger with Sylomer®, double fixing, and omega opening for threaded rods. Ideal for suspended ceilings with limited anchor capacity.

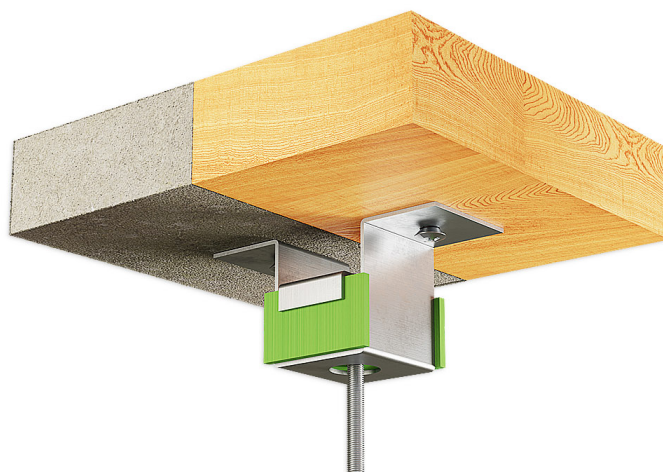

The Akustik 1 + Sylomer® range is designed for the suspension of acoustic ceilings, vibrating piping, and suspended machinery.


The integrated Sylomer® microcellular polyurethane element provides outstanding vibration isolation, particularly at low frequencies, delivering higher isolation performance than conventional rubber or cork isolators. Two Sylomer® grades are available to optimise performance across different load ranges.

The **double fixing and omega opening for threaded rods** provide flexible and secure installation. The acoustic hanger is available with **M6 or M8 threads**, allowing it to be adapted to different fixing and installation requirements.

A wide range of fixing accessories allows the system to adapt to different installation requirements. The heavy-duty steel housing is designed to withstand tensile loads from 650 to 1,000 kg and is protected with a corrosion-resistant zinc-plated finish for long-term durability.


Drawings

Akustik 1 + Sylomer®15 Type A / Akustik 1 + Sylomer®30 Type A / Akustik 1 + Sylomer®50 Type A / Akustik 1 + Sylomer®75 Type A

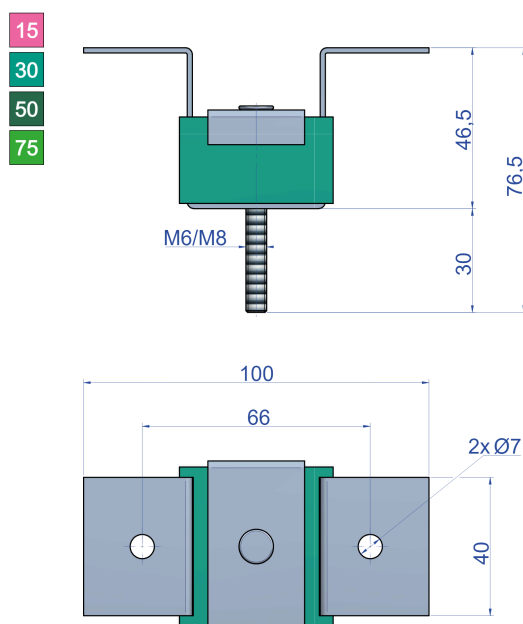

Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 1 + Sylomer®15 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	15	23651	M6	0.133
			23699	M8	0.141
Akustik 1 + Sylomer®30 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	30	30	23501	M6
				23700	M8
Akustik 1 + Sylomer®50 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes and an male fixing type (Type A)	50	50	23502	M6
				23272	M8
Akustik 1 + Sylomer®75 Type A	Metal armor of the Akustik 1 secured to the ceiling with two holes	75	75	23517	M6
				23273	M8





Akustik 1 + Sylomer®15 Type B / Akustik 1 + Sylomer®30 Type B / Akustik 1 + Sylomer®50 Type B / Akustik 1 + Sylomer®75 Type B

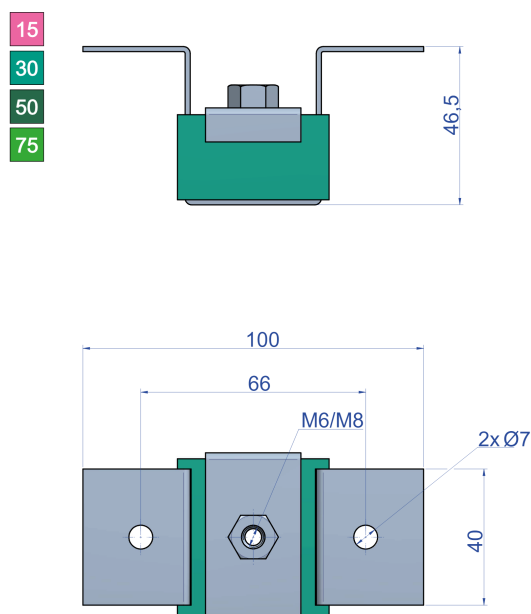





Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 1 + Sylomer®15 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	15	23652	M6	0.125
			23653	M8	0.125
	Akustik 1 + Sylomer®30 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	30	23509	M6
				23603	M8
	Akustik 1 + Sylomer®50 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	50	23520	M6
				23880	M8
	Akustik 1 + Sylomer®75 Type B	Metal armor of the Akustik 1 secured to the ceiling by a welded nut.	75	23525	M6
				23604	M8

Elastic properties

LOAD DEFLECTION GRAPHS

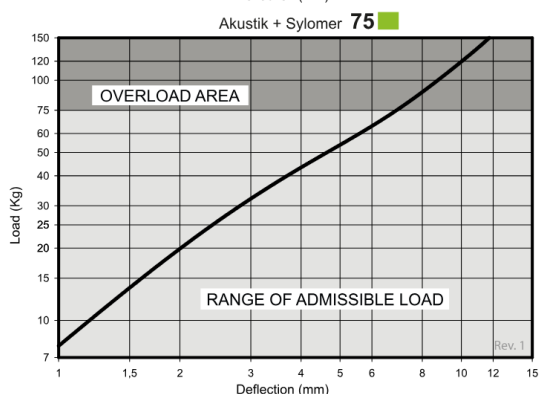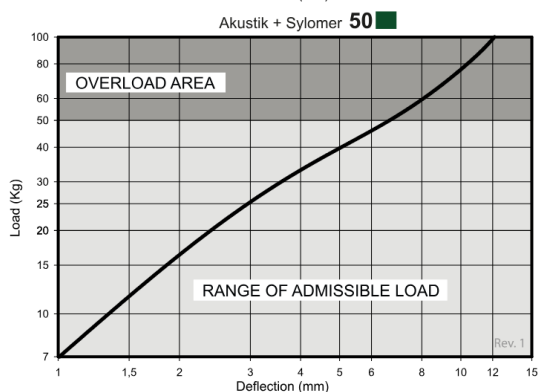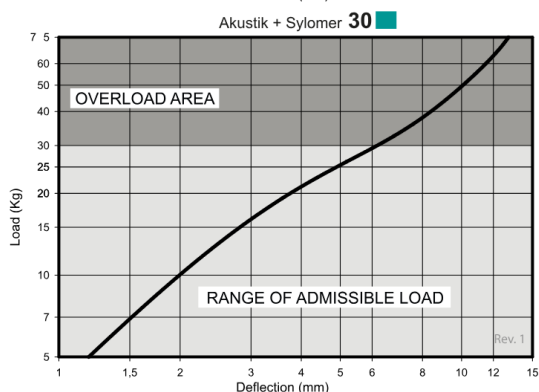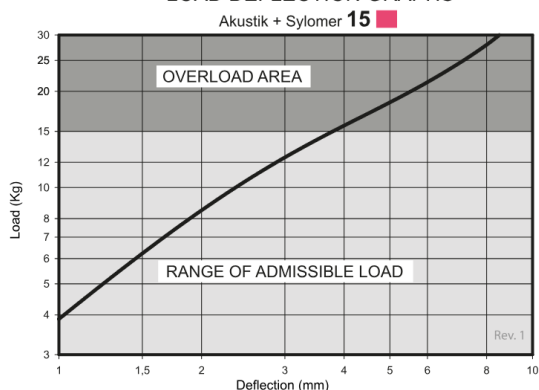

NATURAL FREQUENCY GRAPHS

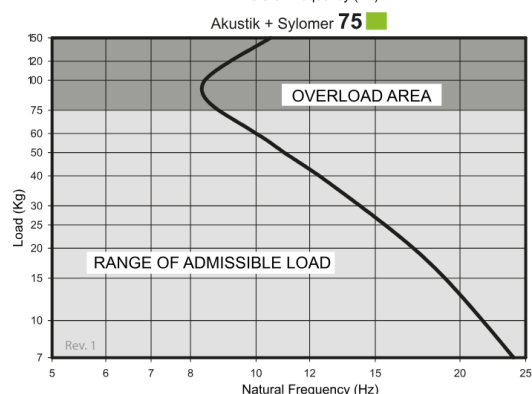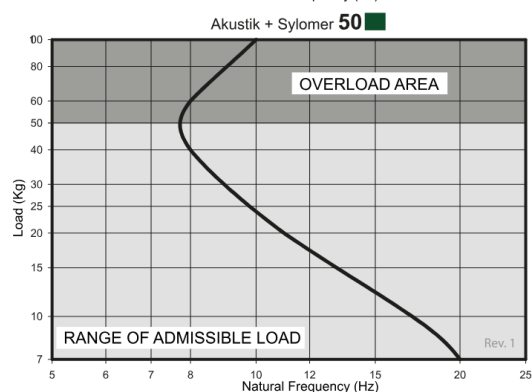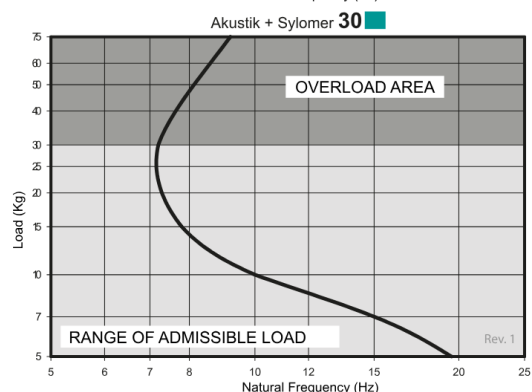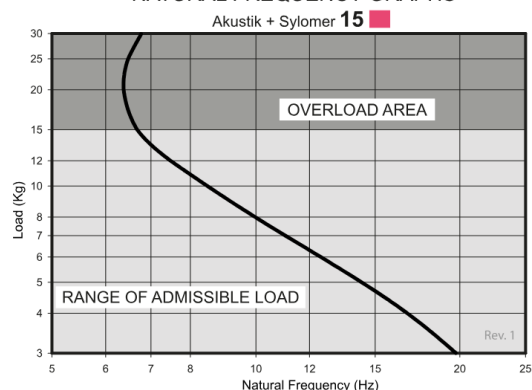

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com