AKUSTIK 1 + SYLOMER®

Anti-vibration support with double fixing, omega window and rod with 11/2 x 1/2 ceiling channels or 12 gauge wire, ideal for ceilings with weak anchors.



The **AKUSTIK 1 + SYLOMER® Acoustic Hanger** is designed for the resilient suspension of **acoustic ceilings using 12-gauge hanger wire**. It can also be used to isolate suspended piping and mechanical equipment from vibration and structure-borne noise.

The **Sylomer® microcellular polyurethane element** provides effective vibration isolation and elastic decoupling from the supporting structure. Different Sylomer® grades are available to match the isolator performance to the required load.


A range of mounting configurations and accessories allows the hanger to be adapted to different installation requirements. The robust metal components are designed to withstand **tensile loads from approximately 1,430 to 2,200 lb** and feature a **corrosion-resistant finish** for long-term durability.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings

Akustik 1 + Sylomer®15 Type C / Akustik 1 + Sylomer®30 Type C / Akustik 1 + Sylomer®50 Type C / Akustik 1 + Sylomer®75 Type C

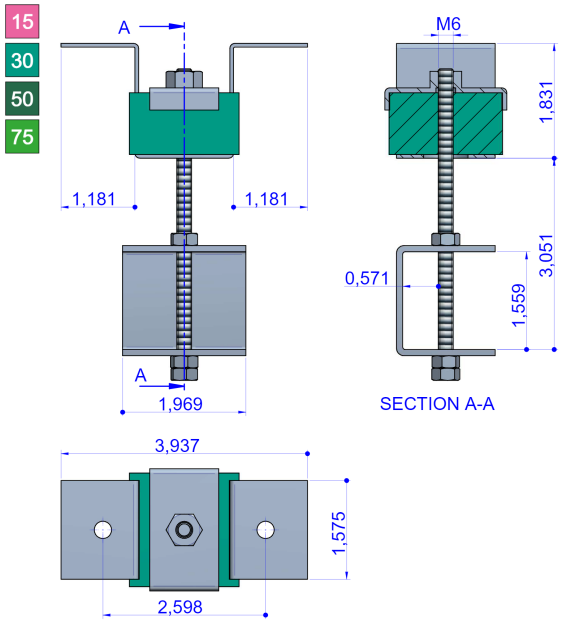


Type	SUMMARY	Max. Load (lbs)	Code
Akustik 1 + Sylomer®15 Type C	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type C)	33	23090
Akustik 1 + Sylomer®30 Type C	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type C)	66	23091
Akustik 1 + Sylomer®50 Type C	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type C)	110	23092
Akustik 1 + Sylomer®75 Type C	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type C)	165	23093

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Akustik 1 + Sylomer®15 Type D / Akustik 1 + Sylomer®30 Type D / Akustik 1 + Sylomer®50 Type D / Akustik 1 + Sylomer®75 Type D

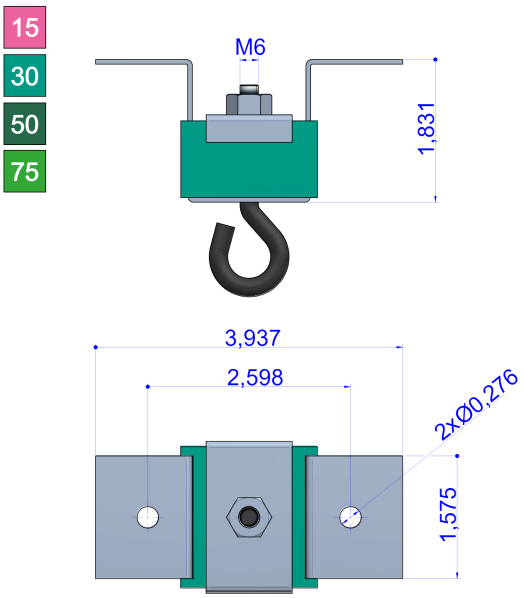

Type	SUMMARY	Max. Load (lbs)	Code
Akustik 1 + Sylomer®15 Type D	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type D)	33	23060
Akustik 1 + Sylomer®30 Type D	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type D)	66	23061
Akustik 1 + Sylomer®50 Type D	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type D)	110	23062
Akustik 1 + Sylomer®75 Type D	Metal armor of the Akustik 1 secured to the ceiling with two holes. (Type D)	165	23063


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

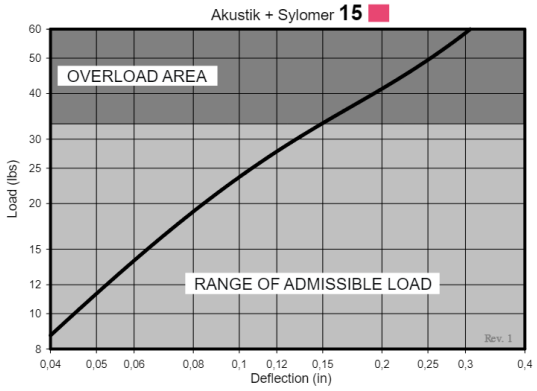


Akustik + Sylomer **30**

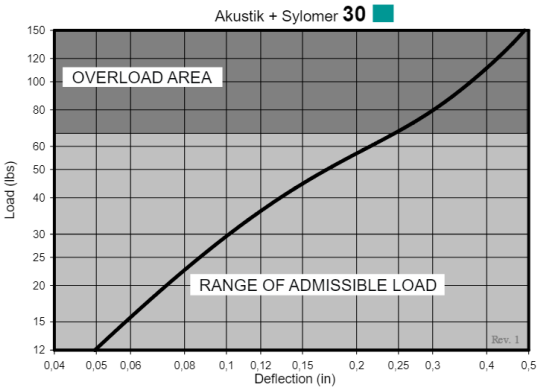

Akustik + Sylomer **50**

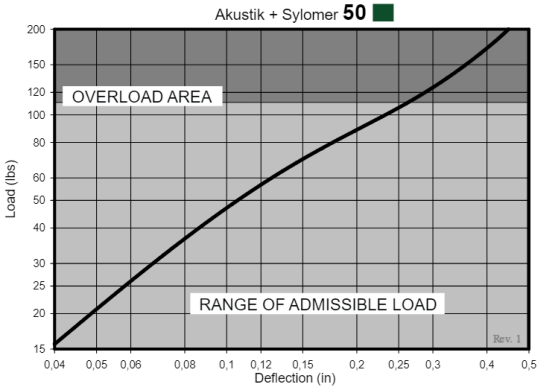


Akustik + Sylomer **75**

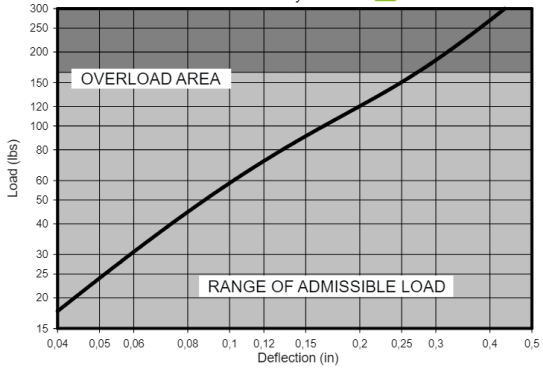


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

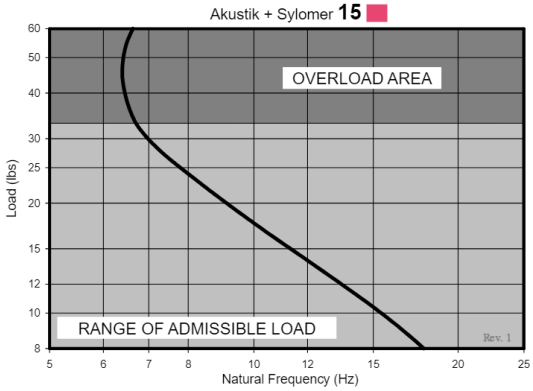


Akustik + Sylomer **30**

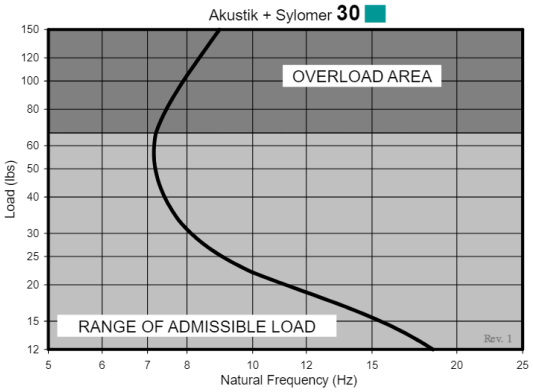

Akustik + Sylomer **50**

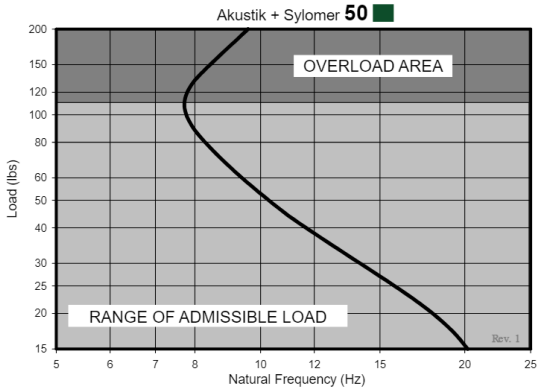

Akustik + Sylomer **75**

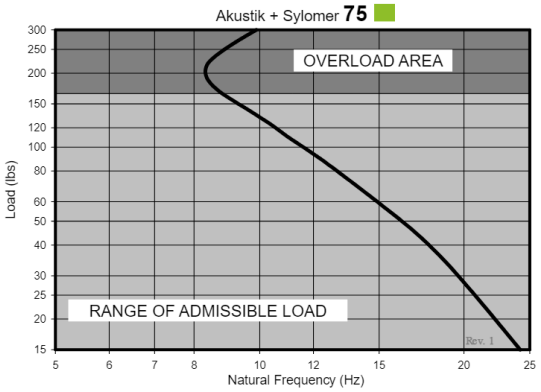

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Technical characteristics

An acoustic hanger for the suspension of ceilings with 11/2 x 1/2 ceiling channels, pipelines and machinery

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.