

Akustik 1

Acoustic hangers for suspended ceilings with double fixing to the structure. High vibration isolation performance and structural durability.



The steel housing is designed to support loads of up to 650 kg and is protected with a corrosion-resistant zinc-plated finish.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13







sales@amcsa.es



www.mecanocaucho.com




Drawings

Akustik 1 A-45 / Akustik 1 B-60

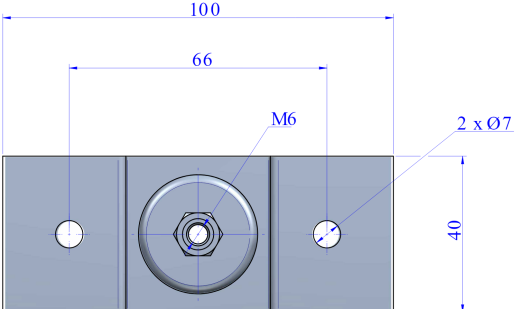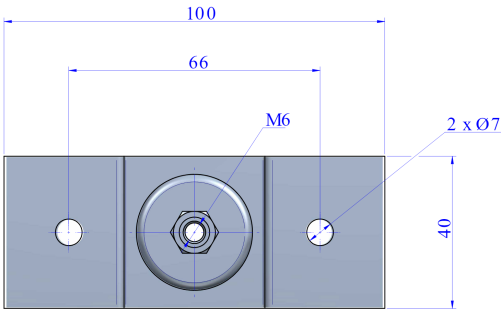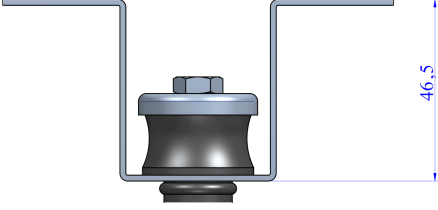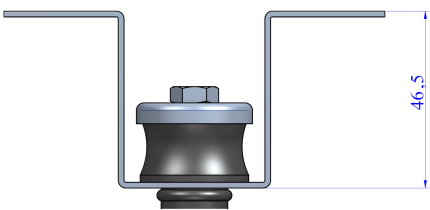

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik 1 A-45	Fitted directly to ceiling using two holes.	8-30	23101	0.105
Akustik 1 B-60	Fitted directly to ceiling using two holes.	25-60	23102	0.105

Elastic properties

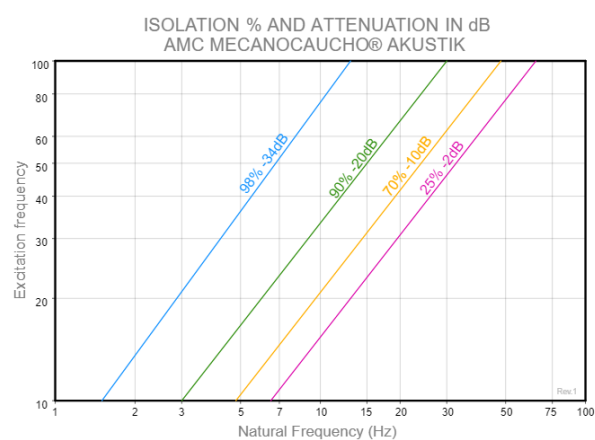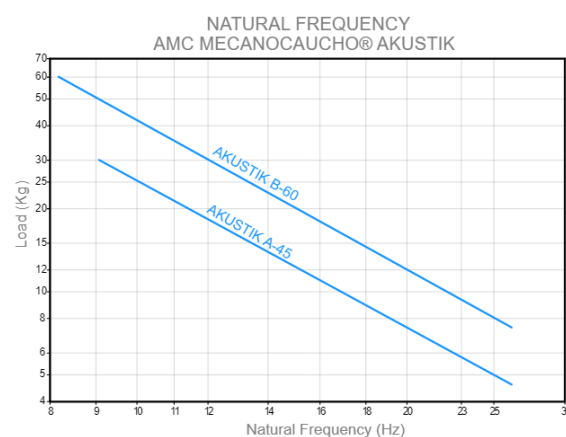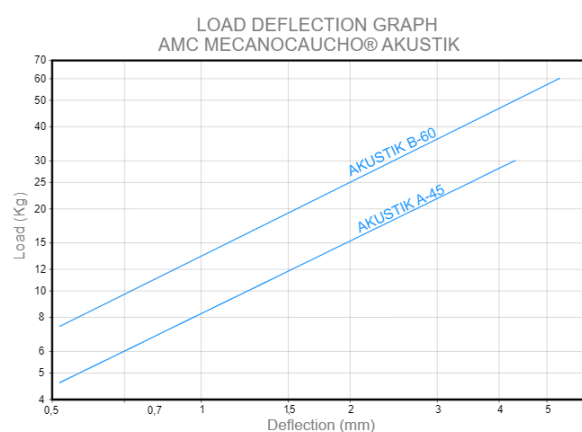

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com

