

Akustik 1

Acoustic hangers for suspended ceilings with double fixing to the structure. High vibration isolation performance and structural durability.




The Akustik 1 range is designed for the suspension of acoustic ceilings, piping, and machinery operating above 1,000 rpm. Every model incorporates the same high-performance elastomer element, specifically engineered to provide effective vibration isolation and long-term mechanical reliability. The steel housing is designed to support loads of up to 1,430 lb and is protected with a corrosion-resistant zinc-plated finish.




Drawings

Akustik 1 A-45 Type C / Akustik 1 B-60 Type C

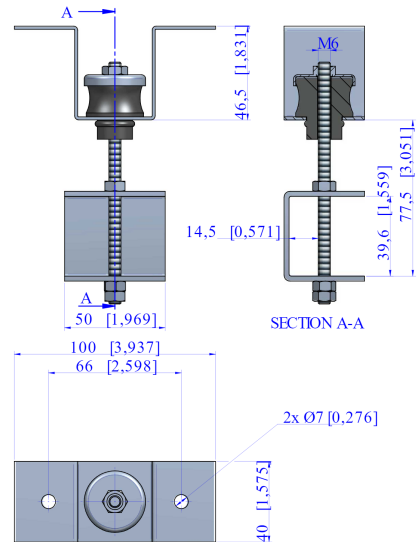




Type	Max. Load (lbs)	Code
Akustik 1 A-45 Type C	66	25547
Akustik 1 B-60 Type C	132	25548

Akustik 1 A-45 Type D / Akustik 1 B-60 Type D

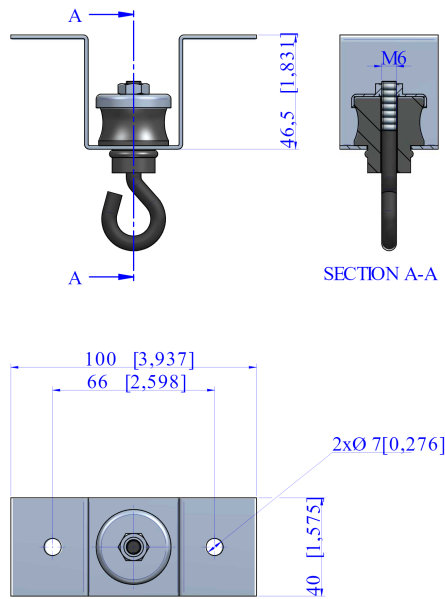

Type	Max. Load (lbs)	Code
Akustik 1 A-45 Type D	66	23014
Akustik 1 B-60 Type D	132	23015

Elastic properties

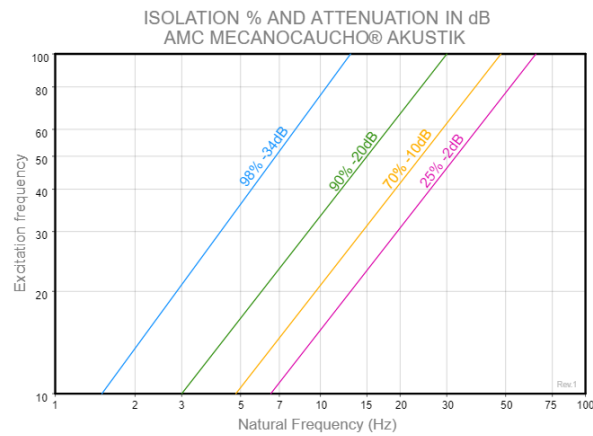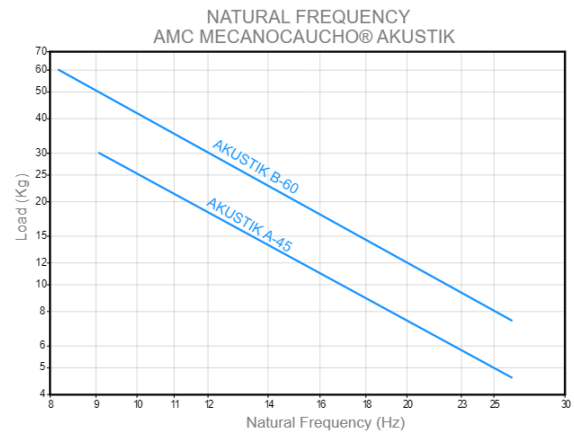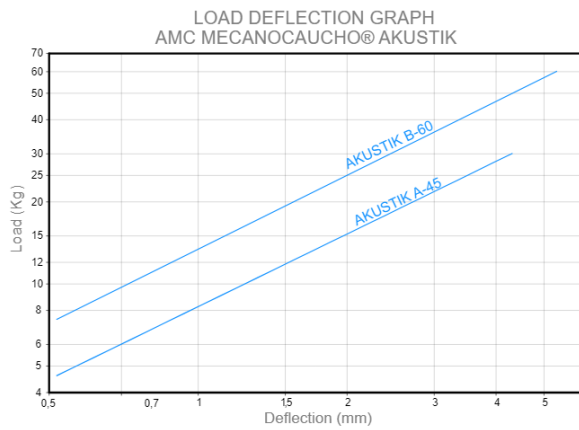

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com