Akustik 3 High + Sylomer® Acoustic Hanger

Acoustic hanger with Sylomer® and extended opening for easier installation and adjustment. Secure fixing and high-performance vibration isolation.



The Akustik 3 High + Sylomer® acoustic hanger is designed for the vibration isolation of suspended ceilings, pipework and suspended mechanical equipment.

Its extended opening provides additional space for installation, making the suspension easier to fit and adjust. The Sylomer® elastic element effectively reduces the transmission of vibration and structure-borne noise to the supporting structure.


This design combines easy installation, secure fixing and high-performance vibration isolation.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Drawings

Akustik 3 High + Sylomer®15 Type A / Akustik 3 High + Sylomer®30 Type A / Akustik 3 High + Sylomer®50 Type A / Akustik 3 High + Sylomer®75 Type A

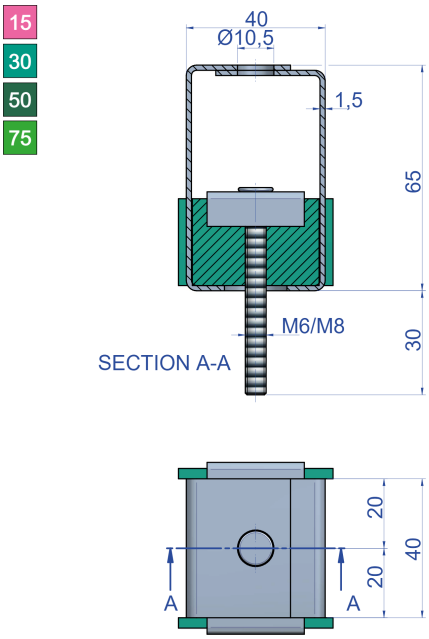


Type	Max.Load (kg)	Code	M	Weight(kg)
Akustik 3 High + Sylomer®15 Type A	15	23749	M6	0.141
		23277	M8	0.141
Akustik 3 High + Sylomer®30 Type A	30	23654	M6	0.141
		23278	M8	0.141
Akustik 3 High + Sylomer®50 Type A	50	23656	M6	0.141
		23279	M8	0.141
Akustik 3 High + Sylomer®75 Type A	75	23658	M6	0.141
		23280	M8	0.141


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Akustik 3 High + Sylomer®15 Type B / Akustik 3 High + Sylomer®30 Type B / Akustik 3 High + Sylomer®50 Type B / Akustik 3 High + Sylomer®75 Type B

15
30
50
75

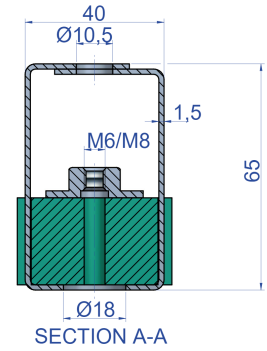



Type	Max.Load (kg)	Code	M	Weight(kg)
Akustik 3 High + Sylomer®15 Type B	15	23750	M6	0.141
		23281	M8	0.141
Akustik 3 High + Sylomer®30 Type B	30	23655	M6	0.141
		23282	M8	0.141
Akustik 3 High + Sylomer®50 Type B	50	23657	M6	0.141
		23283	M8	0.141
Akustik 3 High + Sylomer®75 Type B	75	23659	M6	0.141
		23686	M8	0.141


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

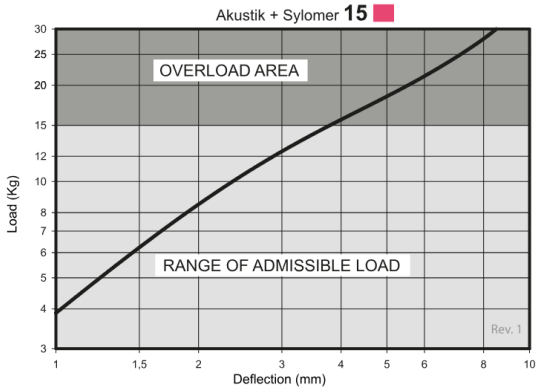


Akustik + Sylomer **30**

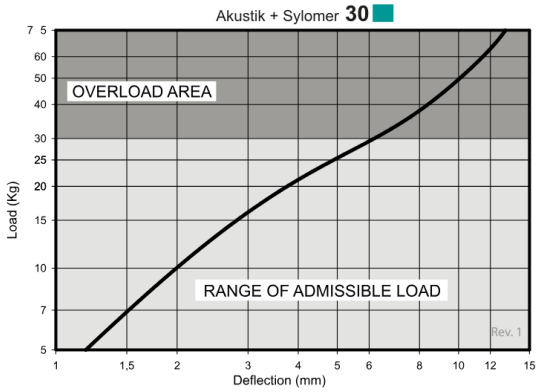

Akustik + Sylomer **50**

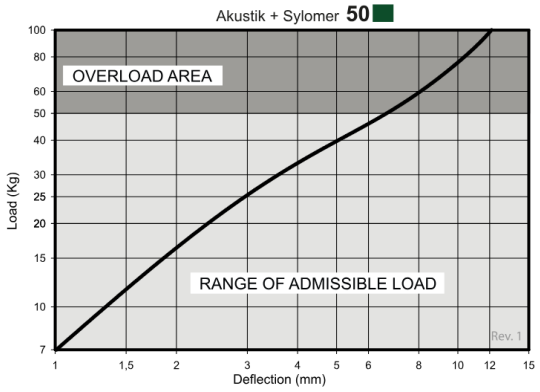


Akustik + Sylomer **75**

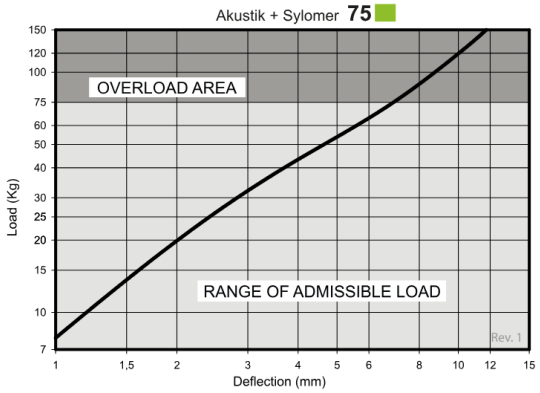


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

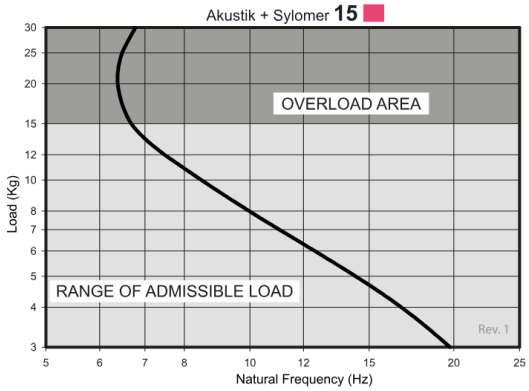


Akustik + Sylomer **30**

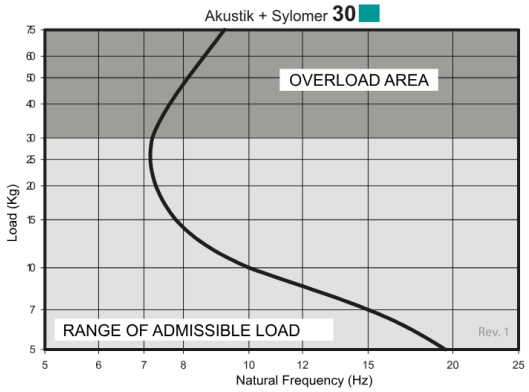

Akustik + Sylomer **50**

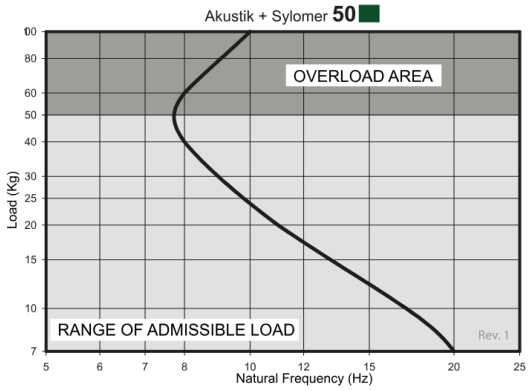

Akustik + Sylomer **75**

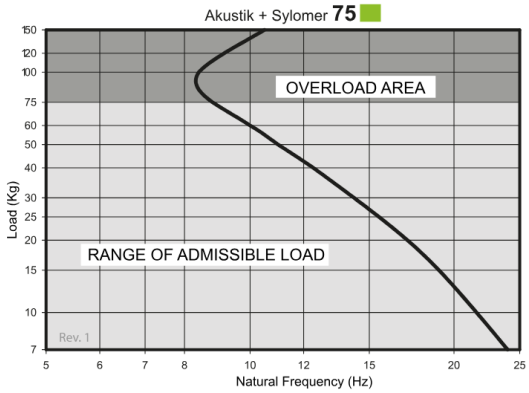

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Secure ceiling anchorage

With more than one fixing point to the overhead slab, it is particularly reliable for anchorages with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.