AKUSTIK 3 + SYLOMER®

These acoustic hangers have been conceived for suspension from suspended ceilings using 11/2 x 1/2 channels, vibrating pipelines and machinery.



These **acoustic hangers** have been conceived for the suspension of false ceilings using 11/2 x 1/2 channels, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcellular polyurethane material achieve elevated isolation values as opposed to other mounts that use rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.


A great variety of fixing metal armors and elements facilitate the installation and to adapt better to each type of job. Their rugged metal parts can withstand tensile stresses from 650Kg to 1000Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Drawings

Akustik 3 + Sylomer®15 Type C / Akustik 3 + Sylomer®30 Type C / Akustik 3 + Sylomer®50 Type C / Akustik 3 + Sylomer®75 Type C

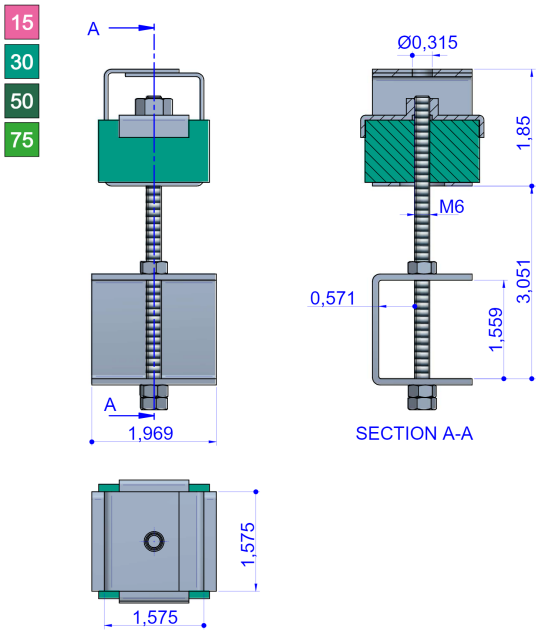


Type	Max. Load (lbs)	Code
Akustik 3 + Sylomer®15 Type C	33	23094
Akustik 3 + Sylomer®30 Type C	66	23095
Akustik 3 + Sylomer®50 Type C	110	23096
Akustik 3 + Sylomer®75 Type C	165	23097

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Akustik 3 + Sylomer®15 Type D / Akustik 3 + Sylomer®30 Type D / Akustik 3 + Sylomer®50 Type D / Akustik 3 + Sylomer®75 Type D

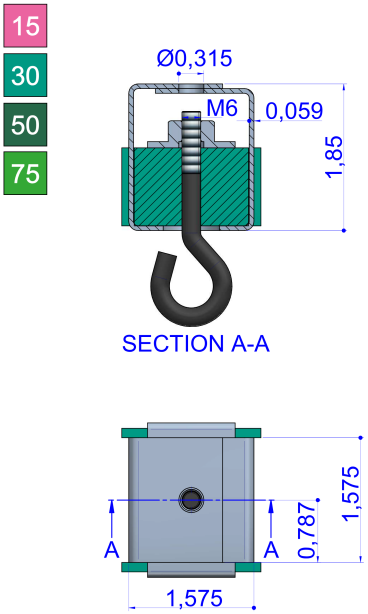

Type	Max. Load (lbs)	Code
Akustik 3 + Sylomer®15 Type D	33	23064
Akustik 3 + Sylomer®30 Type D	66	23065
Akustik 3 + Sylomer®50 Type D	110	23066
Akustik 3 + Sylomer®75 Type D	165	23067


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

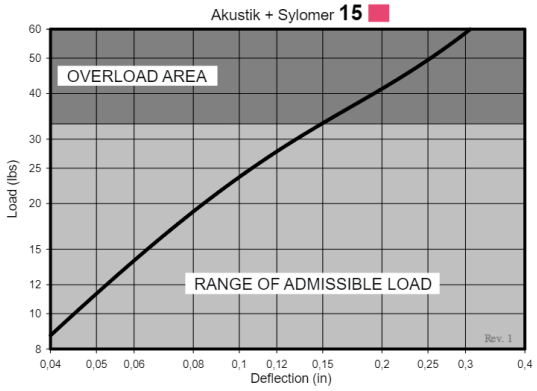


Akustik + Sylomer **30**

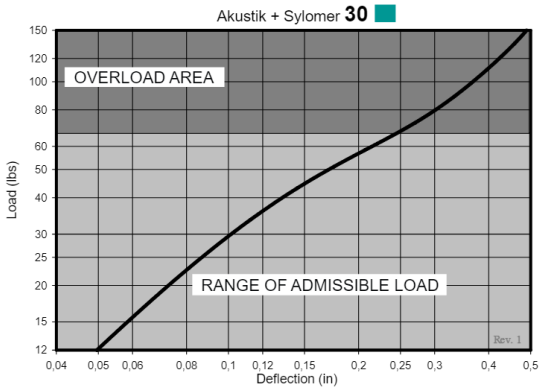

Akustik + Sylomer **50**

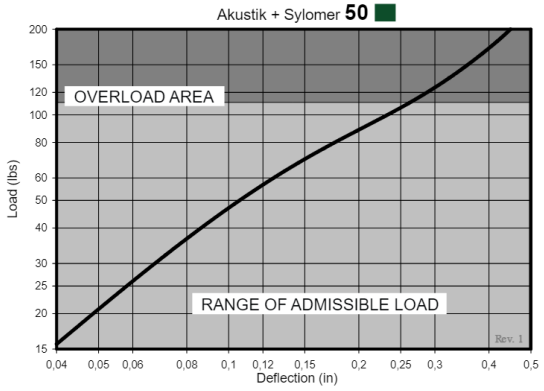


Akustik + Sylomer **75**

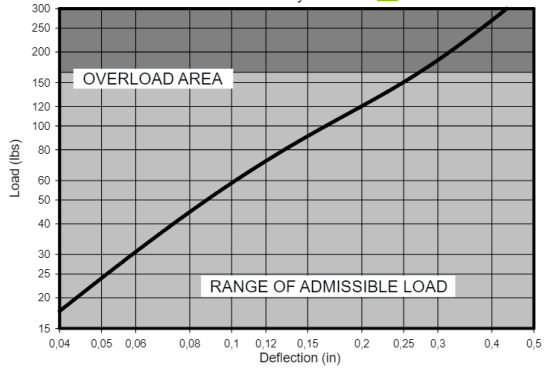


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

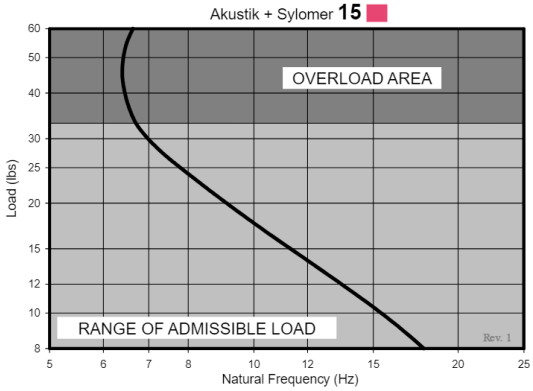


Akustik + Sylomer **30**

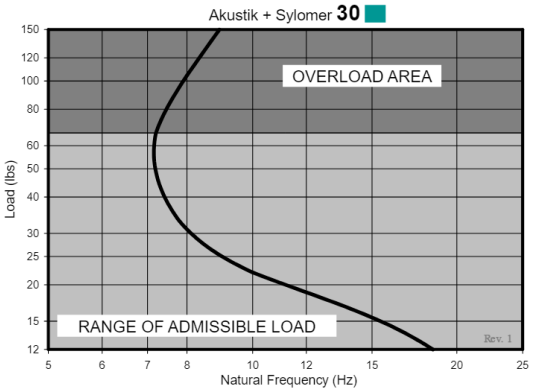

Akustik + Sylomer **50**

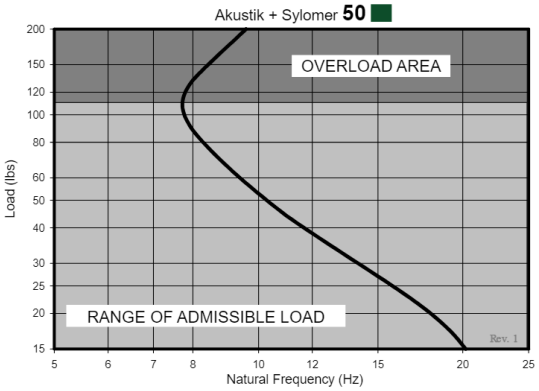

Akustik + Sylomer **75**

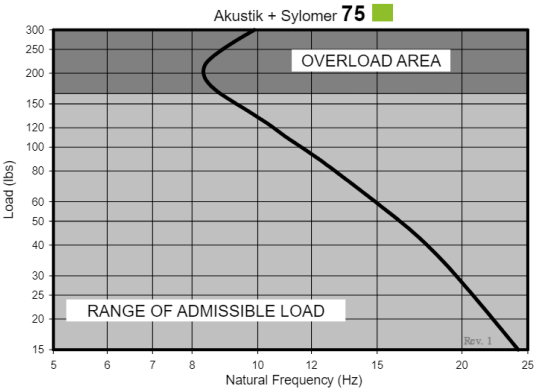

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.