

Akustik 3

Acoustic hanger with through-hole fixing for direct screw installation. Secure structural fixing with effective vibration isolation.




The Akustik 3 range is designed for the suspension of acoustic ceilings, piping, and machinery operating above 1,000 rpm. Every model incorporates the same high-performance elastomer element, specifically engineered to provide effective vibration isolation and long-term mechanical reliability.

The steel housing is designed to support loads of up to 650 kg and is protected with a corrosion-resistant zinc-plated finish. Its through-hole fixing allows secure, direct installation to the supporting structure.






Drawings

Akustik 3 A-45 / Akustik 3 B-60

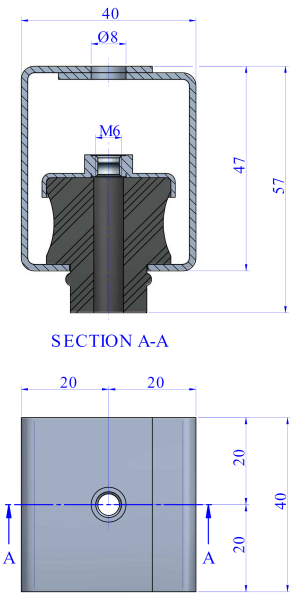

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik 3 A-45	Fitted by using an M-6 rod and a nut.	8-30	23121	0.102
	Akustik 3 B-60	Fitted by using an M-6 rod and a nut.	25-60	23122

Elastic properties

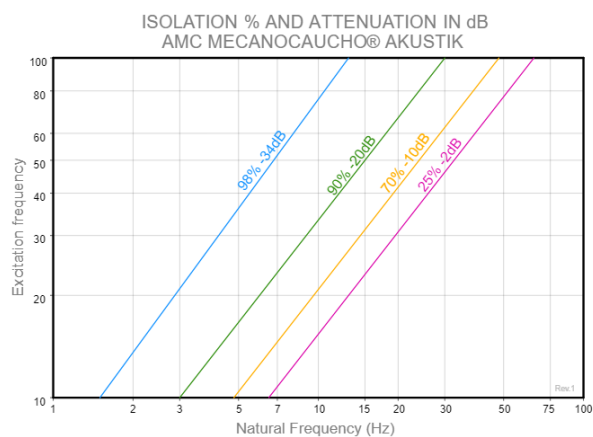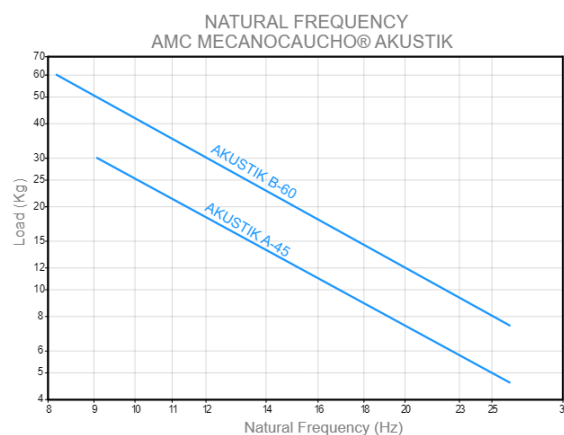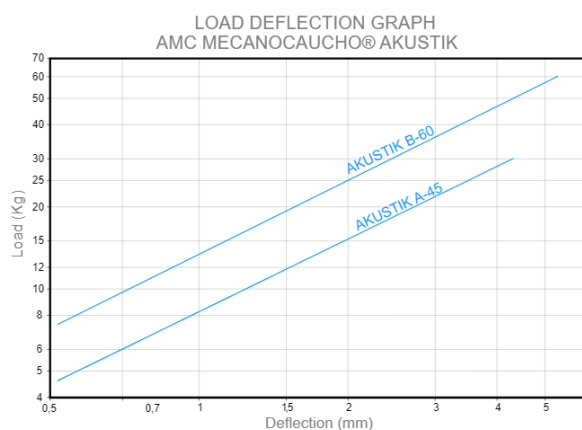

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com