

Akustik 4 High +Sylomer®

Acoustic hanger with extended clearance and welded nut for double threaded rods. High-performance Sylomer® vibration isolation.




The AMC-MECANOCAUCHO® Akustik 4 High + Sylomer® range has been developed for suspended ceilings, HVAC services, pipework and suspended mechanical equipment where increased installation clearance is required.

Its extended-height design provides additional space for easier installation and adjustment of double threaded rods while maintaining the secure welded nut connection of the Akustik 4 range. The integrated Sylomer® microcellular polyurethane element effectively reduces the transmission of structure-borne vibration and noise, and is available in two stiffness grades to match the supported load.

A wide range of fixing accessories allows fast installation in different suspended applications. Heavy-duty steel components withstand tensile loads from 650 kg to 1,000 kg and are protected by a corrosion-resistant finish for long-term durability.



Drawings

Akustik 4 High + Sylomer®15 Type A / Akustik 4 High + Sylomer®30 Type A / Akustik 4 High + Sylomer®50 Type A / Akustik 4 High + Sylomer®75 Type A

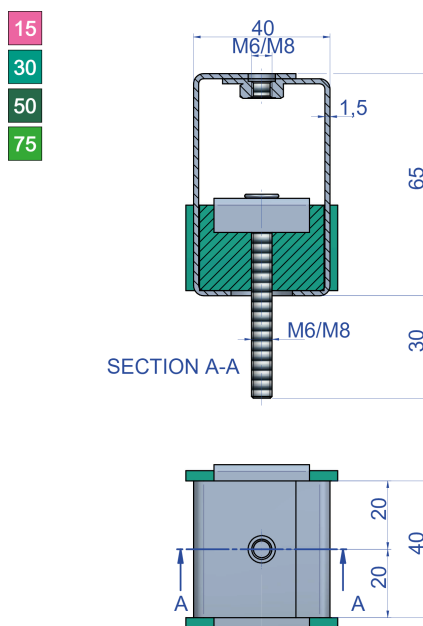

Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 4 High + Sylomer®15 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	15	23189	M6	0.133
			23286	M8	0.133
Akustik 4 High + Sylomer®30 Type A	Akustik 4 High + Sylomer®30 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	30	23537	M6
				23287	M8
Akustik 4 High + Sylomer®50 Type A	Akustik 4 High + Sylomer®50 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	50	23580	M6
				23288	M8
Akustik 4 High + Sylomer®75 Type A	Akustik 4 High + Sylomer®75 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	75	23539	M6
				23289	M8





Akustik 4 High + Sylomer®15 Type B / Akustik 4 High + Sylomer®30 Type B / Akustik 4 High + Sylomer®50 Type B / Akustik 4 High + Sylomer®75 Type B

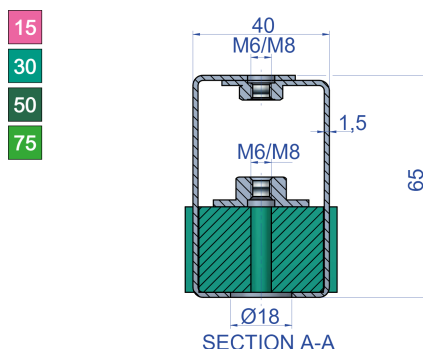





Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 4 High + Sylomer®15 Type B	Metal armor of the Akustik 4 secured to the ceiling by an screw.	15	23190	M6	0.133
			23266	M8	0.133
	Akustik 4 High + Sylomer®30 Type B	Metal armor of the Akustik 4 secured to the ceiling by an screw.	30	23538	M6
				23267	M8
	Akustik 4 High + Sylomer®50 Type B	Metal armor of the Akustik 4 secured to the ceiling by an screw.	50	23581	M6
				23284	M8
	Akustik 4 High + Sylomer®75 Type B	Metal armor of the Akustik 4 secured to the ceiling by an screw.	75	23540	M6
				23285	M8

Elastic properties

LOAD DEFLECTION GRAPHS

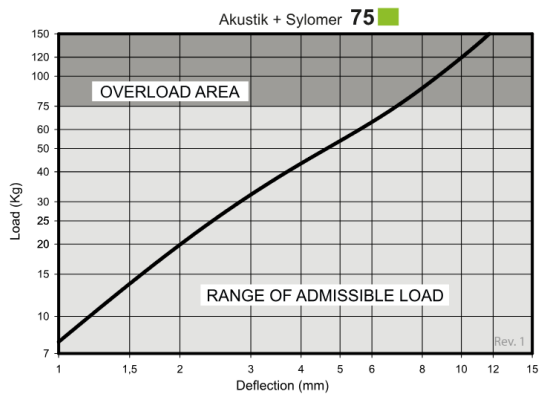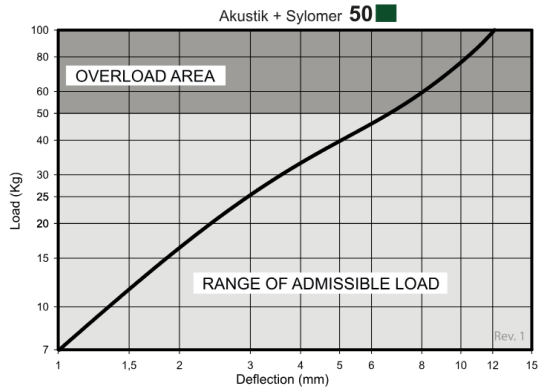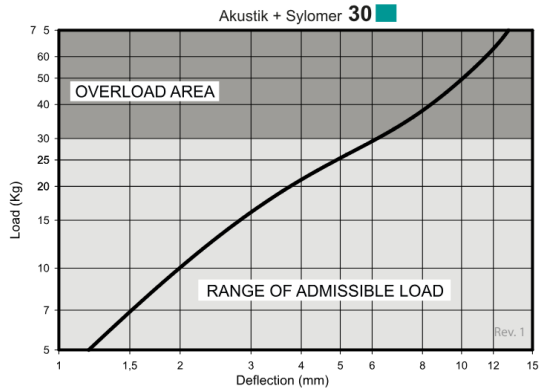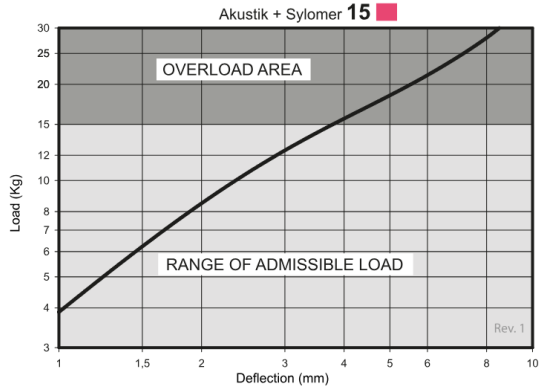

NATURAL FREQUENCY GRAPHS

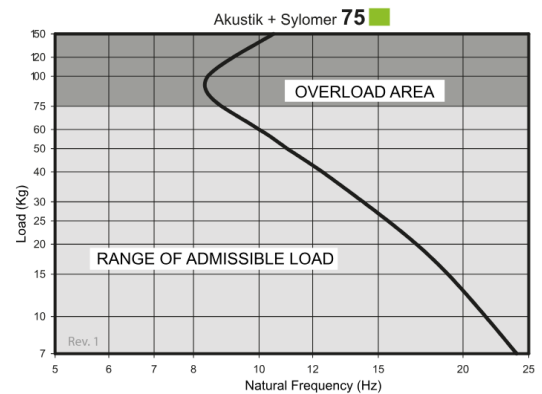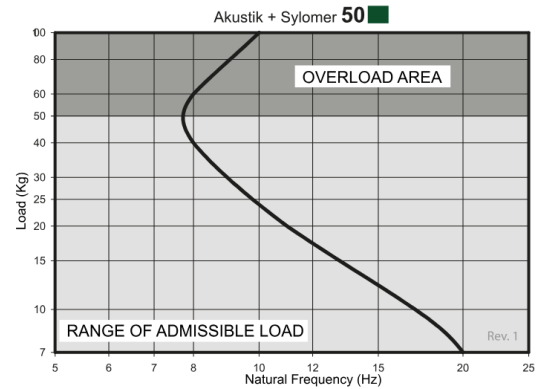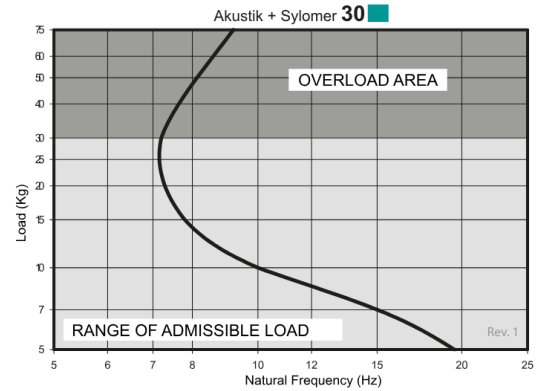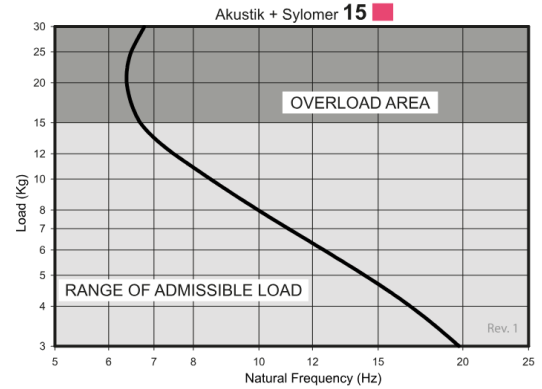

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com