Akustik 4 +Sylomer®

Acoustic hanger with welded nut for double threaded rods. Secure fixing with high-performance Sylomer® vibration isolation.



The AMC-MECANOCAUCHO® Akustik 4 + Sylomer® range has been specifically developed for the vibration isolation of suspended ceilings, HVAC services, pipework and suspended mechanical equipment where a secure double-rod connection is required.

Its welded nut design allows the use of two threaded rods, providing increased stability and safety while maintaining excellent vibration isolation through the integrated Sylomer® microcellular polyurethane element. The range is available in two Sylomer® grades, enabling the stiffness to be matched to the supported load for optimum acoustic performance.


A wide selection of brackets and fixing accessories makes installation quick and versatile. Heavy-duty steel components withstand tensile loads from 650 kg to 1,000 kg and feature a corrosion-resistant finish for long-term durability in demanding building environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

Akustik 4 + Sylomer®15 Type A / Akustik 4 + Sylomer®30 Type A / Akustik 4 + Sylomer®50 Type A / Akustik 4 + Sylomer®75 Type A

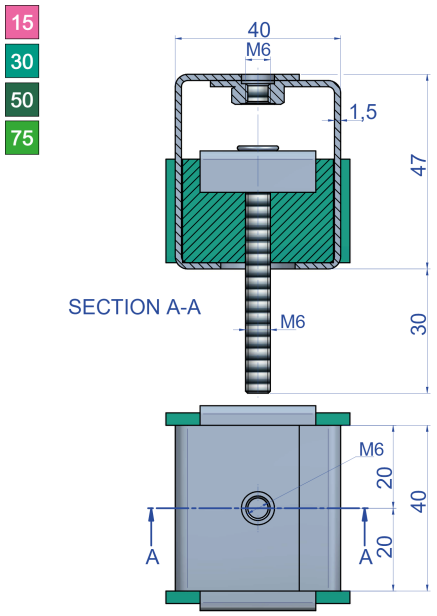


Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 4 + Sylomer®15 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	15	23187	M6	0.133
Akustik 4 + Sylomer®30 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	30	23505	M6	0.141
Akustik 4 + Sylomer®50 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	50	23578	M6	0.141
Akustik 4 + Sylomer®75 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	75	23521	M6	0.141

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Akustik 4 + Sylomer®15 Type B / Akustik 4 + Sylomer®30 Type B / Akustik 4 + Sylomer®50 Type B / Akustik 4 + Sylomer®75 Type B

15
30
50
75

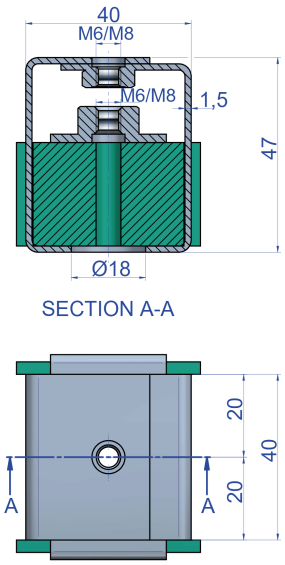

Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 4 + Sylomer®15 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	15	23188	M6	0.133
			23740	M8	0.129
Akustik 4 + Sylomer®30 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	30	23513	M6	0.141
			23744	M8	0.141
Akustik 4 + Sylomer®50 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	50	23579	M6	0.141
			23276	M8	0.141
Akustik 4 + Sylomer®75 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	75	23529	M6	0.141
			23675	M8	0.14


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

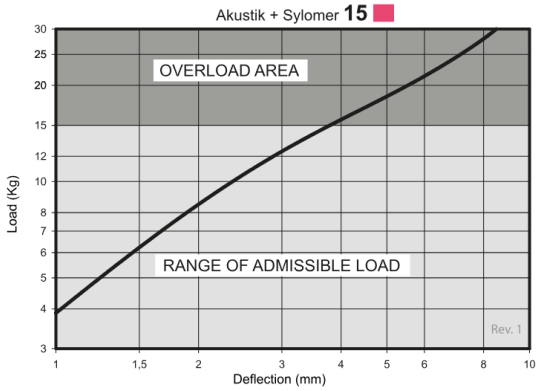


Akustik + Sylomer **30**

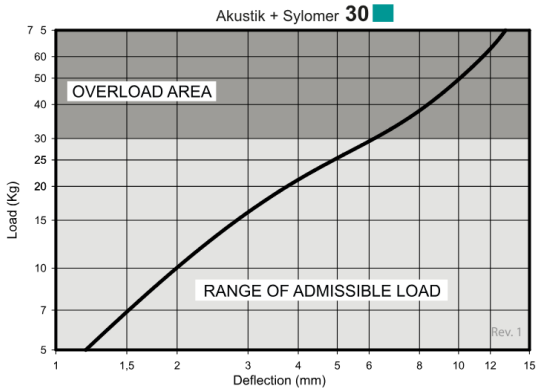

Akustik + Sylomer **50**

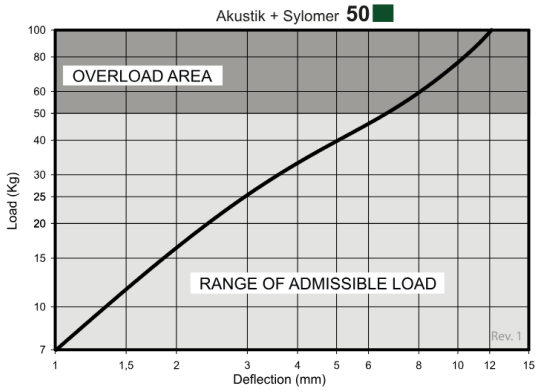


Akustik + Sylomer **75**

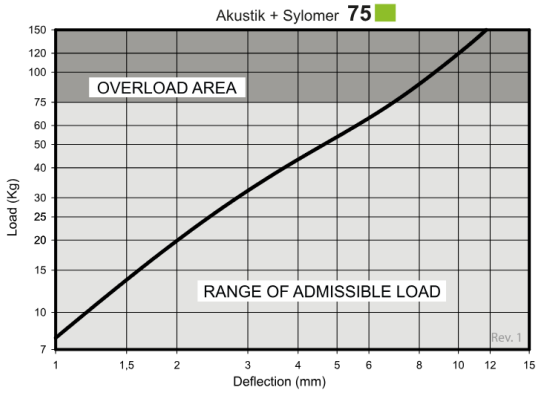


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

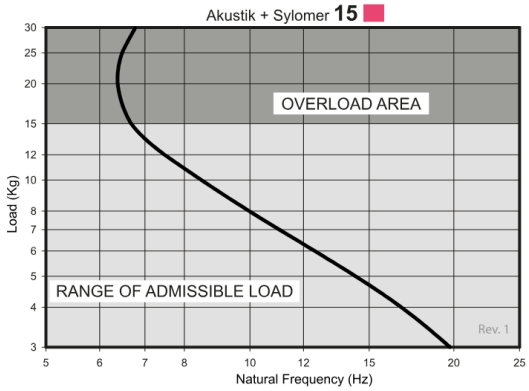


Akustik + Sylomer **30**

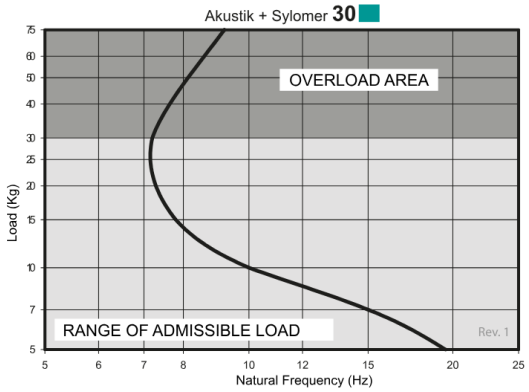

Akustik + Sylomer **50**

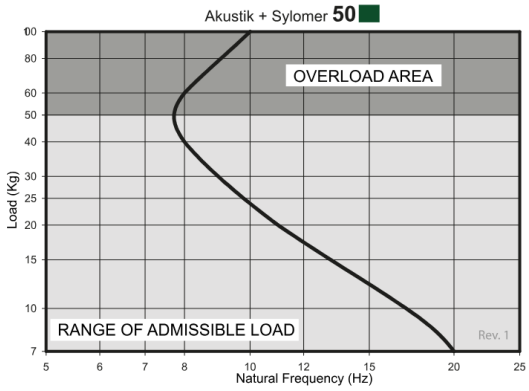

Akustik + Sylomer **75**

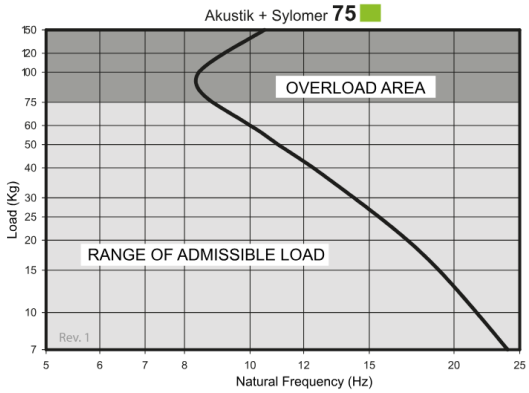

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.