

Akustik 4 +Sylomer®

Acoustic hanger with welded nut for double threaded rods. Secure fixing with high-performance Sylomer® vibration isolation.




The AMC-MECANOCAUCHO® Akustik 4 + Sylomer® range has been specifically developed for the vibration isolation of suspended ceilings, HVAC services, pipework and suspended mechanical equipment where a secure double-rod connection is required.

Its welded nut design allows the use of two threaded rods, providing increased stability and safety while maintaining excellent vibration isolation through the integrated Sylomer® microcellular polyurethane element. The range is available in two Sylomer® grades, enabling the stiffness to be matched to the supported load for optimum acoustic performance.

A wide selection of brackets and fixing accessories makes installation quick and versatile. Heavy-duty steel components withstand tensile loads from 650 kg to 1,000 kg and feature a corrosion-resistant finish for long-term durability in demanding building environments.

Drawings


Akustik 4 + Sylomer®15 Type A / Akustik 4 + Sylomer®30 Type A / Akustik 4 + Sylomer®50 Type A / Akustik 4 + Sylomer®75 Type A

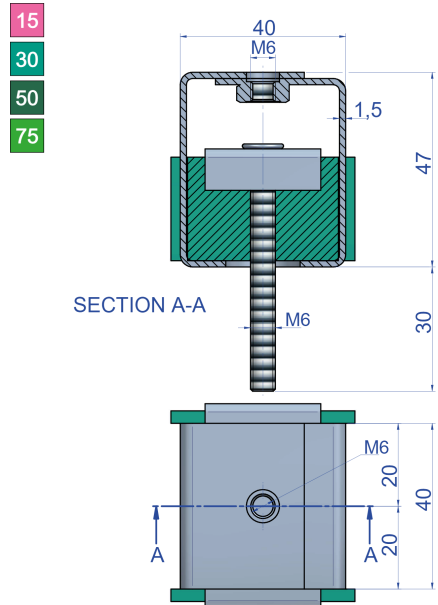


Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 4 + Sylomer®15 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	15	23187	M6	0.133
	Akustik 4 + Sylomer®30 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	30	23505	M6
	Akustik 4 + Sylomer®50 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	50	23578	M6
	Akustik 4 + Sylomer®75 Type A	Metal armor of the Akustik 4 secured to the ceiling by an screw.	75	23521	M6

Akustik 4 + Sylomer®15 Type B / Akustik 4 + Sylomer®30 Type B / Akustik 4 + Sylomer®50 Type B / Akustik 4 + Sylomer®75 Type B

15
30
50
75







SECTION A-A







Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik 4 + Sylomer®15 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	15	23188	M6	0.133
			23740	M8	0.129
	Akustik 4 + Sylomer®30 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	30	23513	M6
				23744	M8
	Akustik 4 + Sylomer®50 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	50	23579	M6
				23276	M8
	Akustik 4 + Sylomer®75 Type B	Metal armor of the Akustik Rapid secured to the ceiling by a welded nut.	75	23529	M6
				23675	M8

Elastic properties

LOAD DEFLECTION GRAPHS

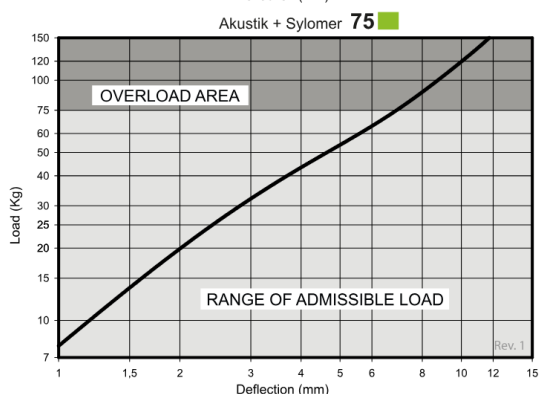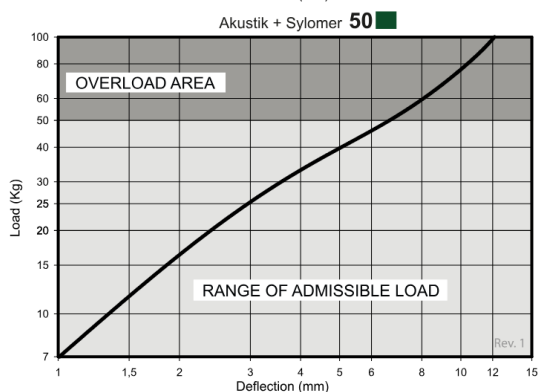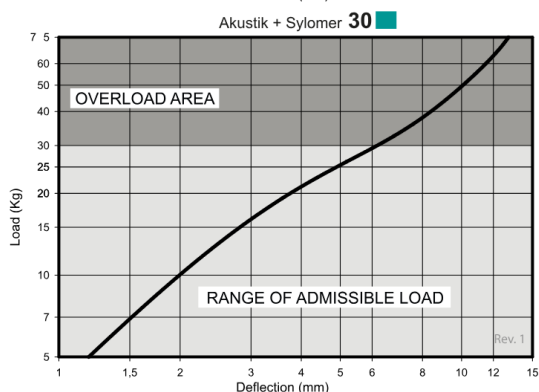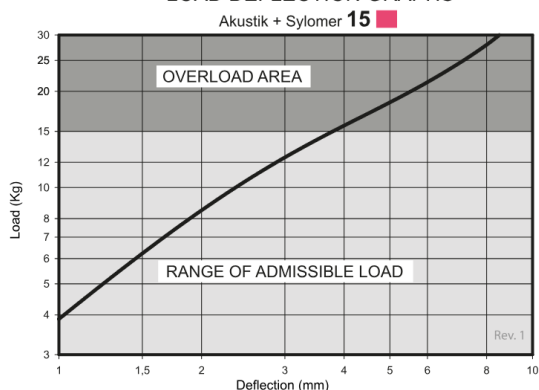

NATURAL FREQUENCY GRAPHS

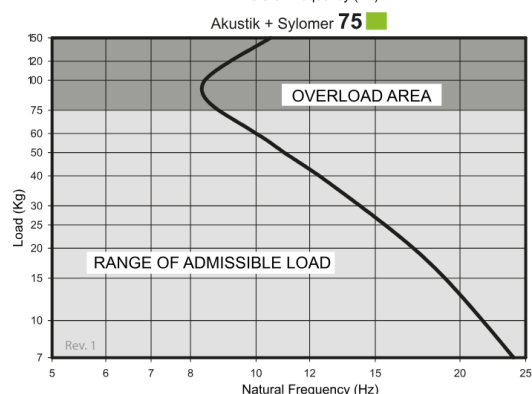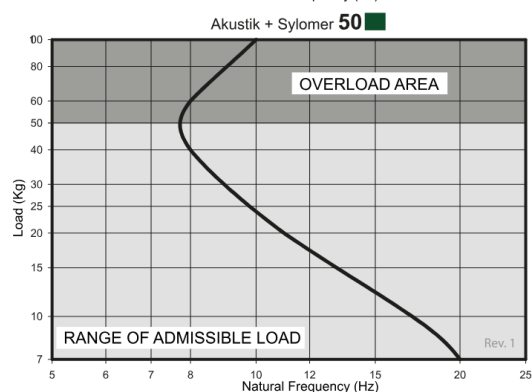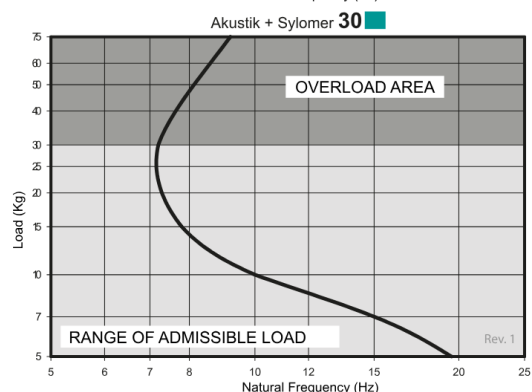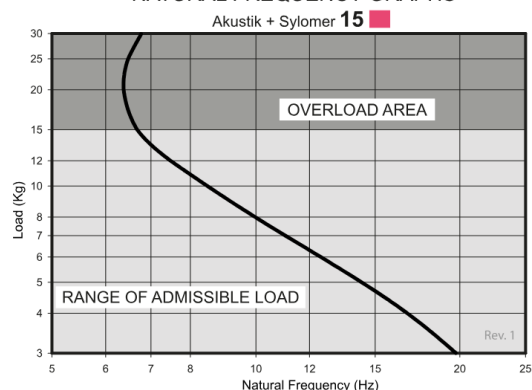

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com