

Akustik 4

Acoustic hanger with female M6 thread for suspended ceilings.
Flexible, adjustable installation with threaded rod.




The Akustik 4 range is designed for the suspension of acoustic ceilings and machinery operating above 1,000 rpm. Every model incorporates the same high-performance elastomer element, specifically engineered to provide effective vibration isolation and long-term mechanical reliability.

The steel housing is designed to support loads of up to 650 kg and is protected with a corrosion-resistant zinc-plated finish. The integrated female M6 thread allows quick, adjustable installation using threaded rods.




Drawings

Akustik 4 A-45 / Akustik 4 B-60

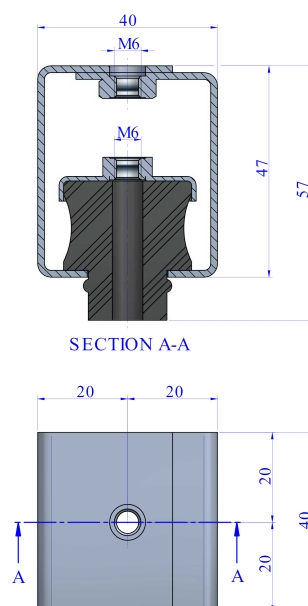


Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik 4 A-45	Fitted to ceiling using an M-6 rod.	8-30	23131	0.104
	Akustik 4 B-60	Fitted to ceiling using an M-6 rod.	25-60	23132

Akustik 4 High A-45

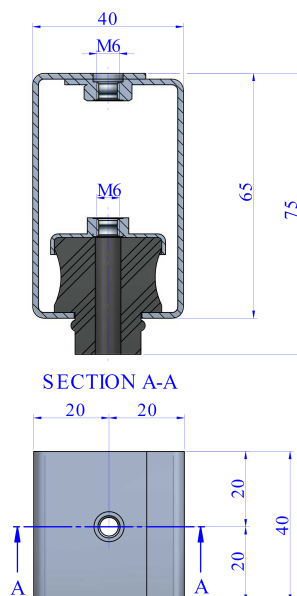




Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik 4 High A-45	Fitted to ceiling using an M-6 rod.	8-30	23133	0.104

Akustik 4 High B-60

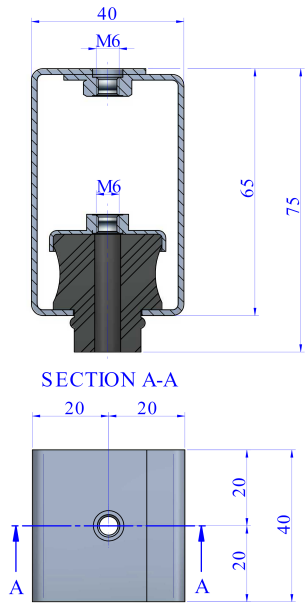

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik 4 High B-60	Fitted to ceiling using an M-6 rod.	25-60	23134	0.104

Elastic properties

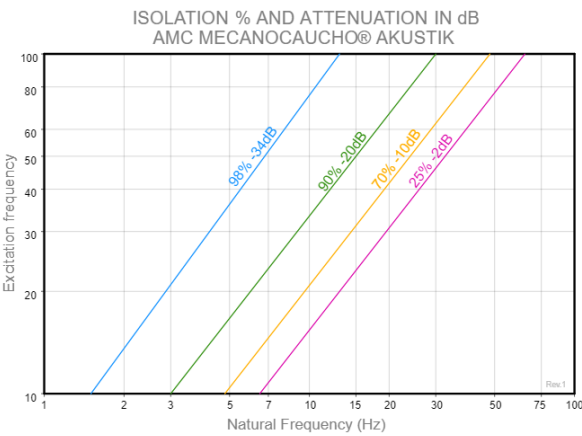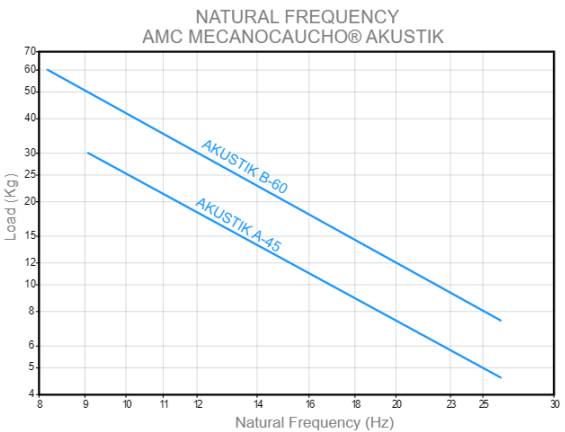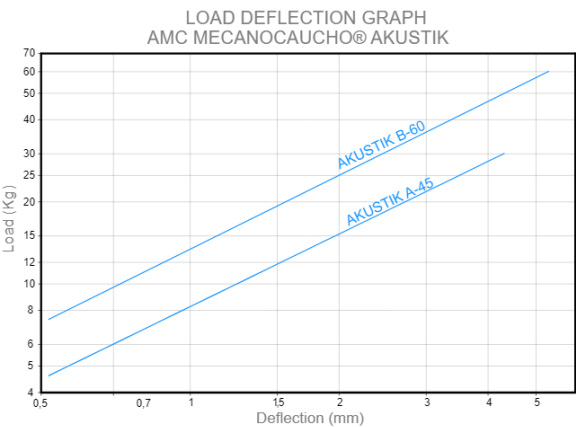

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com