AKUSTIK GB + SYLOMER®

Acoustic hanger with Sylomer® for suspended ceilings, piping, and mechanical equipment.



The **AKUSTIK GB + SYLOMER® acoustic hangers** are a simple and effective solution for the vibration isolation of suspended ceilings, piping, and mechanical equipment.

The Sylomer® microcellular polyurethane isolator provides effective vibration isolation and helps reduce the transmission of **structure-borne noise** through the building structure.

Their compact and versatile design allows for straightforward installation in a wide range of suspended applications. Different Sylomer® grades are available to match the isolator to the required load and achieve the appropriate level of vibration isolation.


The robust metal components feature a **corrosion-resistant finish** for reliable performance and long service life.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings

Akustik GB + Sylomer®15 Type C / Akustik GB + Sylomer®30 Type C / Akustik GB + Sylomer®50 Type C / Akustik GB + Sylomer®75 Type C

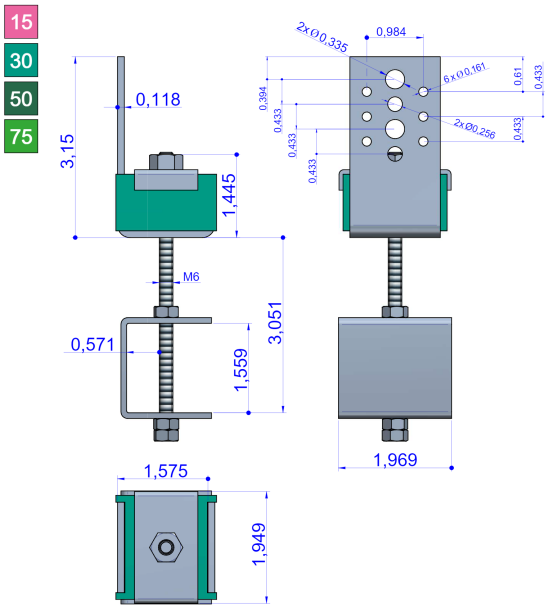


Type	Max. Load (lbs)	Code
Akustik GB + Sylomer®15 Type C	33	25617
Akustik GB + Sylomer®30 Type C	66	25618
Akustik GB + Sylomer®50 Type C	110	25619
Akustik GB + Sylomer®75 Type C	165	25620

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Akustik GB + Sylomer®15 Type D / Akustik GB + Sylomer®30 Type D / Akustik GB + Sylomer®50 Type D / Akustik GB + Sylomer®75 Type D

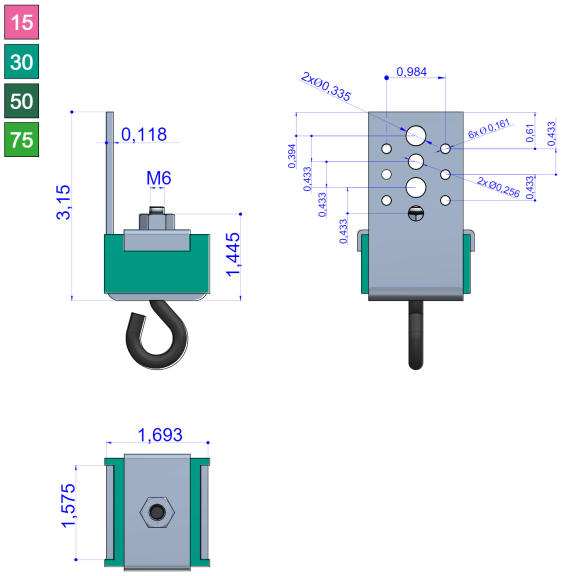

Type	Max. Load (lbs)	Code
Akustik GB + Sylomer®15 Type D	33	23068
Akustik GB + Sylomer®30 Type D	66	23069
Akustik GB + Sylomer®50 Type D	110	23070
Akustik GB + Sylomer®75 Type D	165	23071


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

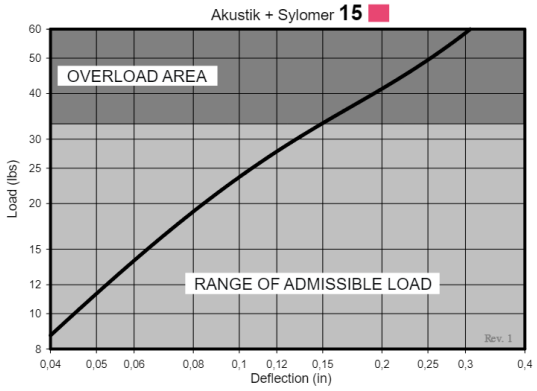


Akustik + Sylomer **30**

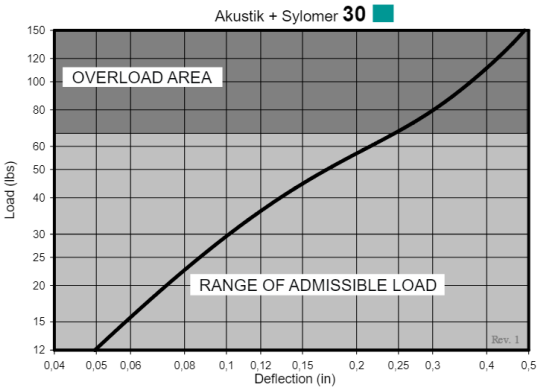

Akustik + Sylomer **50**

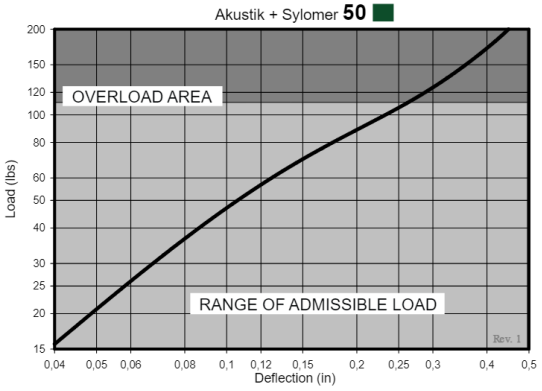


Akustik + Sylomer **75**

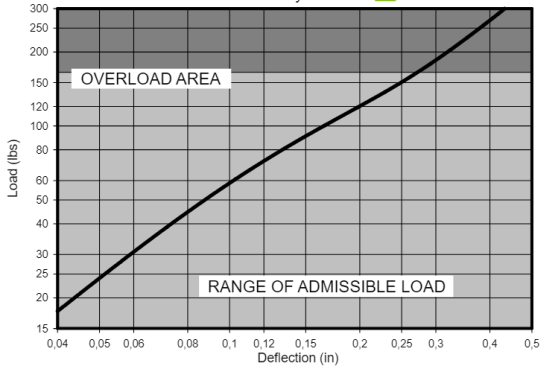


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

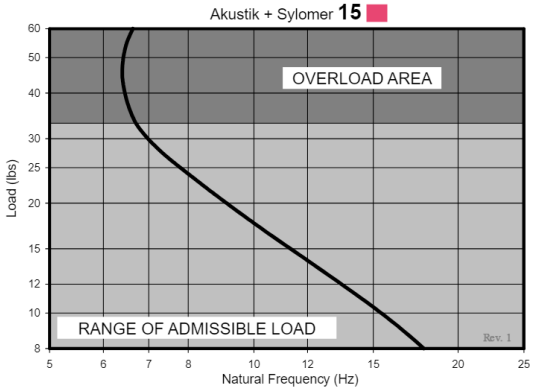


Akustik + Sylomer **30**

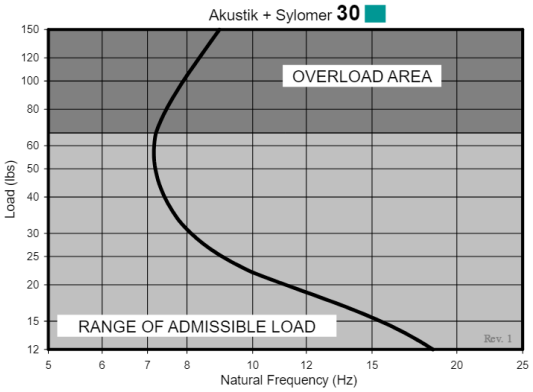

Akustik + Sylomer **50**

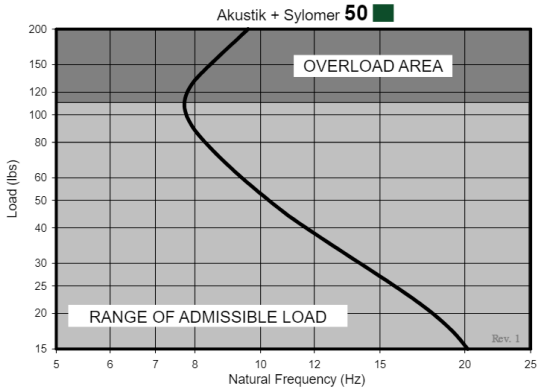

Akustik + Sylomer **75**

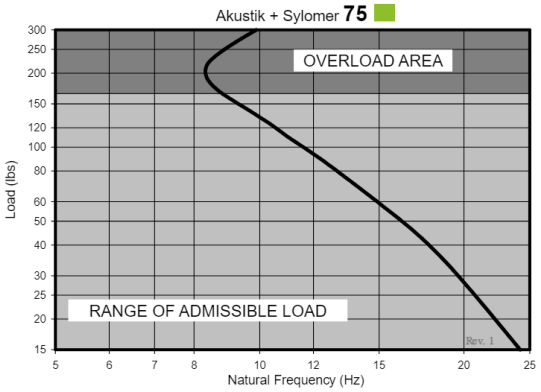

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Technical characteristics

The Sylomer® microcellular polyurethane material provides superior isolation than rubber and/or cork materials and two versions are available depending on the load capacity required.

Type A is supplied with a rod to fix to a channel/bracket and Type B has an integrated nut for quick fixing of a suspension rod.

All metal parts have anti-corrosion zinc-plating.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.