AKUSTIK NONIUS LATERAL + SYLOMER®

Reinforced side support with Nonius anchoring. Omega double point fixing for maximum safety and effective acoustic insulation.



These **acoustic hangers** have been conceived for the suspension of false ceilings, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcellular polyurethane material achieve elevated isolation values as opposed to other mounts that use rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.


A great variety of fixing metal armors and elements facilitate the installation and to adapt better to each type of job. Their rugged metal parts can withstand tensile stresses from 650Kg to 1000Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

Akustik Lateral Nonius + Sylomer®15 / Akustik Lateral Nonius + Sylomer®30 / Akustik Lateral Nonius + Sylomer®50

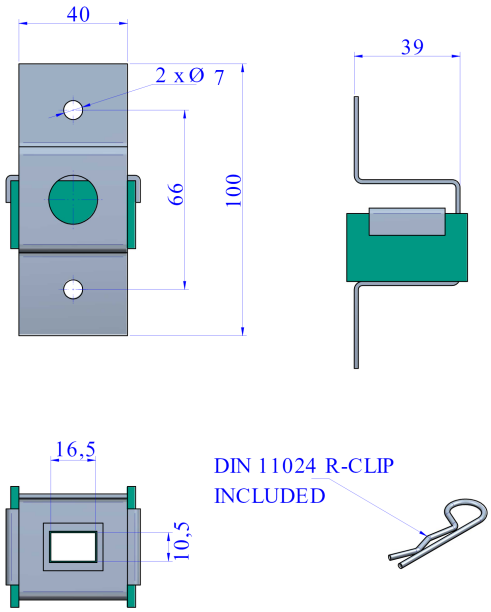

Type	Code
Akustik Lateral Nonius + Sylomer®15	23677
Akustik Lateral Nonius + Sylomer®30	23679
Akustik Lateral Nonius + Sylomer®50	23681


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

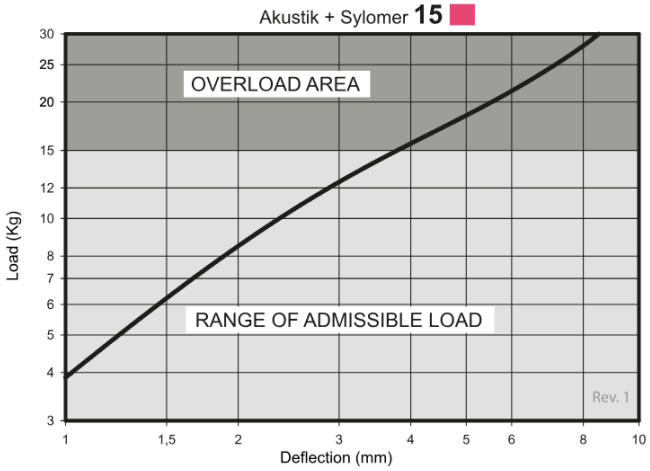

Akustik + Sylomer **30**

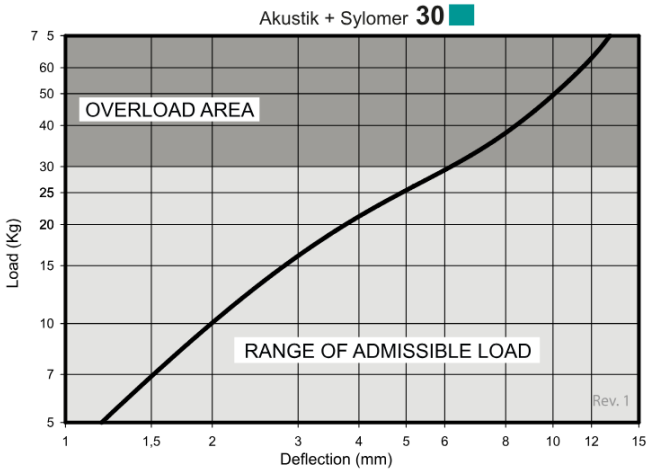


Akustik + Sylomer **50**

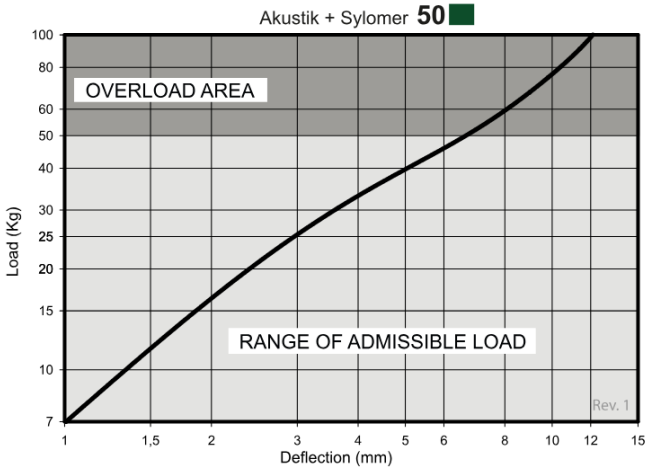


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

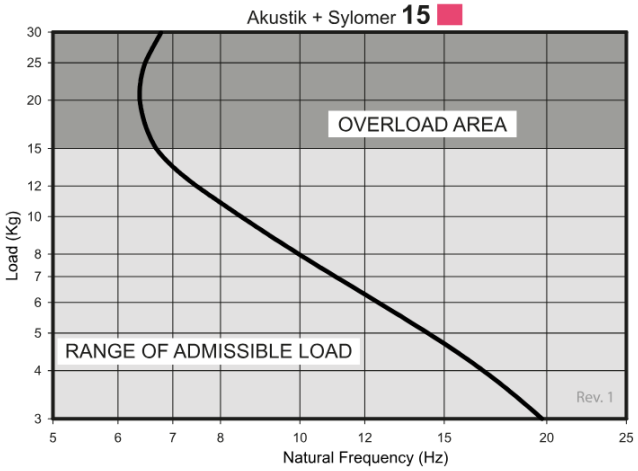

Akustik + Sylomer **30**

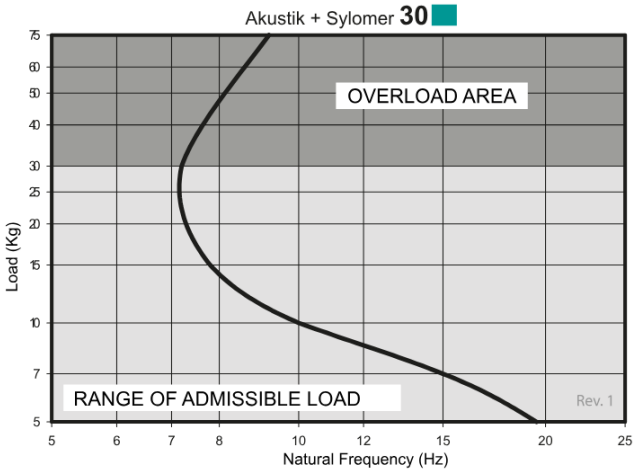

Akustik + Sylomer **50**

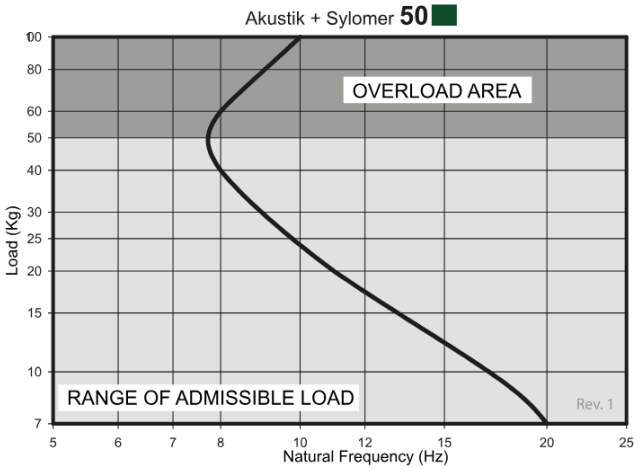

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Secure ceiling anchorage

With more than one fixing point to the overhead slab, it is particularly reliable for anchorages with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.