AKUSTIK LATERAL + SYLOMER®

Side-mounted acoustic hanger with double fixing for beams. Compact design with Sylomer® vibration isolation.



These acoustic hangers have been conceived for the suspension of false ceilings, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcellular polyurethane material achieve elevated isolation values as opposed to other mounts that use rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.


A great variety of fixing metal armors and elements facilitate the installation and to adapt better to each type of job. Their rugged metal parts can withstand tensile stresses from 650Kg to 1000Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Drawings

Akustik 1 Lateral + Sylomer®15 Type A / Akustik Lateral + Sylomer 30 Type A / Akustik Lateral + Sylomer 50 Type A / Akustik Lateral + Sylomer 75 Type A

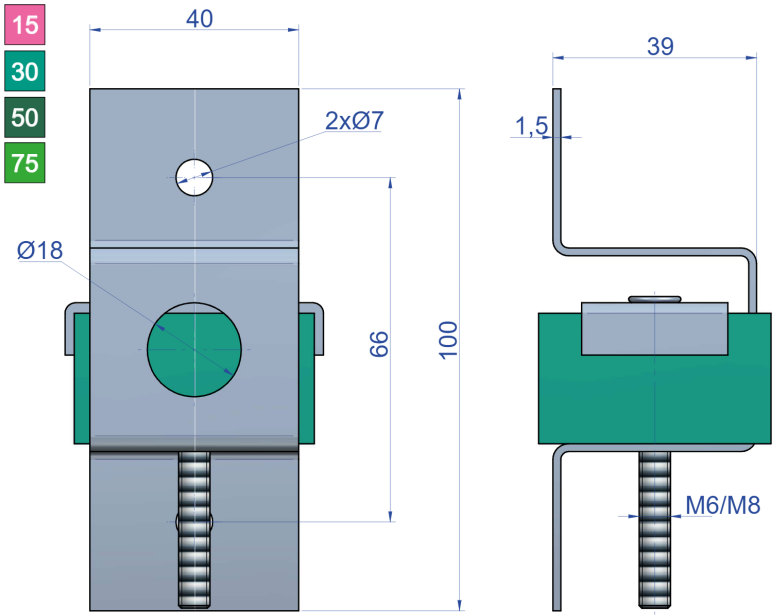


Type	Max.Load (kg)	Code	M	Weight(kg)
Akustik 1 Lateral + Sylomer®15 Type A	15	23663	M6	0.125
		23292	M8	0.125
Akustik Lateral + Sylomer 30 Type A	30	23573	M6	0.125
		23293	M8	0.125
Akustik Lateral + Sylomer 50 Type A	50	23586	M6	0.125
		23294	M8	0.125
Akustik Lateral + Sylomer 75 Type A	75	23574	M6	0.125
		23295	M8	0.125

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Akustik 1 Lateral + Sylomer®15 Type B / Akustik Lateral + Sylomer 30 Type B / Akustik Lateral + Sylomer 50 Type B / Akustik Lateral + Sylomer 75 Type B

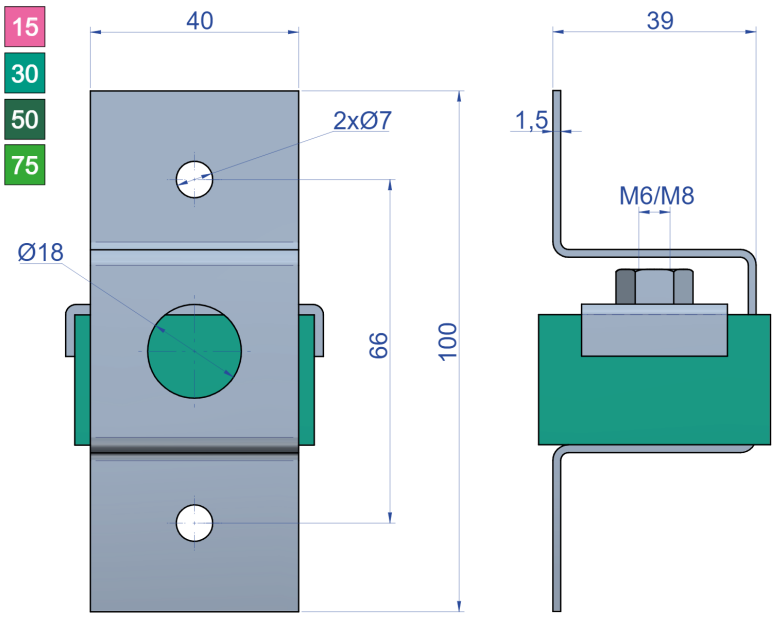

Type	Max.Load (kg)	Code	M	Weight(kg)
Akustik 1 Lateral + Sylomer®15 Type B	15	23664	M6	0.125
		23296	M8	0.125
Akustik Lateral + Sylomer 30 Type B	30	23510	M6	0.125
		23297	M8	0.125
Akustik Lateral + Sylomer 50 Type B	50	23587	M6	0.125
		23777	M8	0.125
Akustik Lateral + Sylomer 75 Type B	75	23526	M6	0.125
		23298	M8	0.125


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

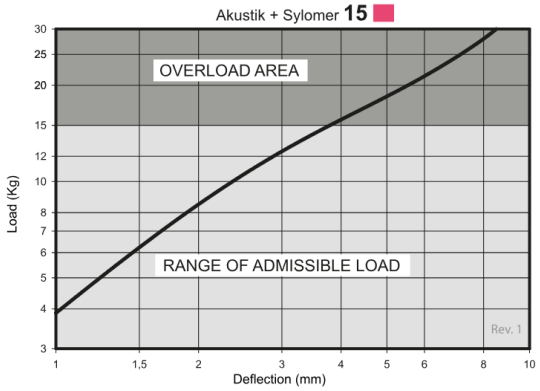


Akustik + Sylomer **30**

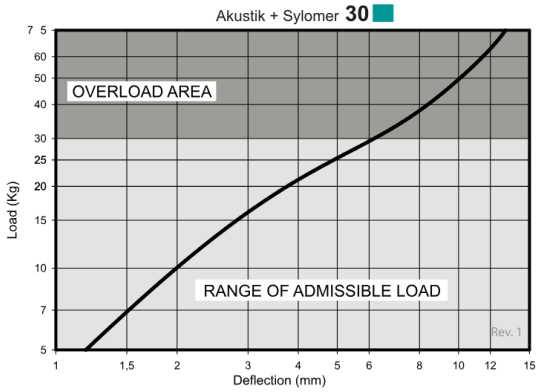

Akustik + Sylomer **50**

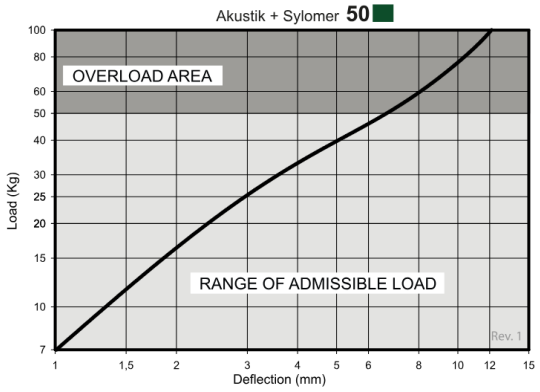


Akustik + Sylomer **75**

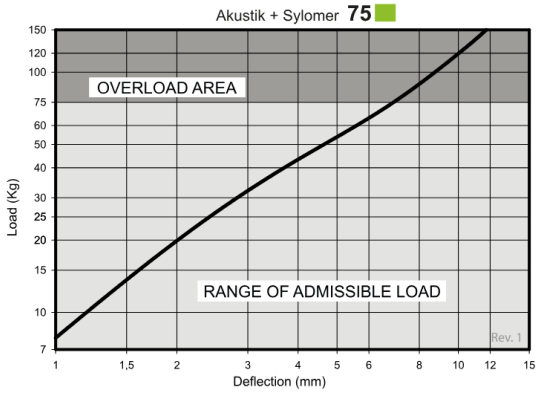


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

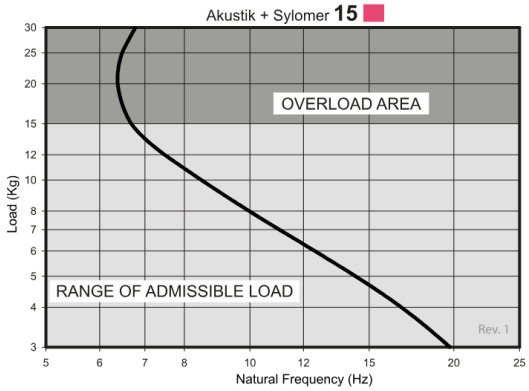


Akustik + Sylomer **30**

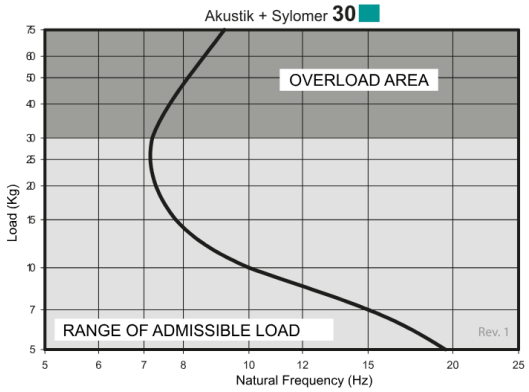

Akustik + Sylomer **50**

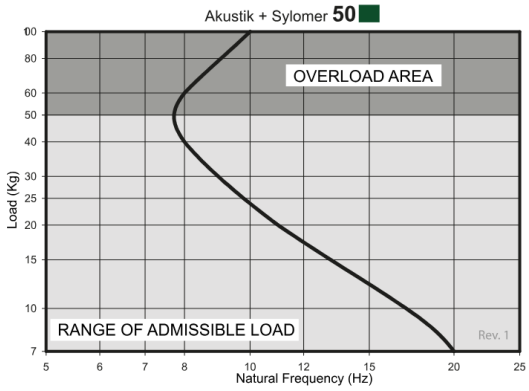

Akustik + Sylomer **75**

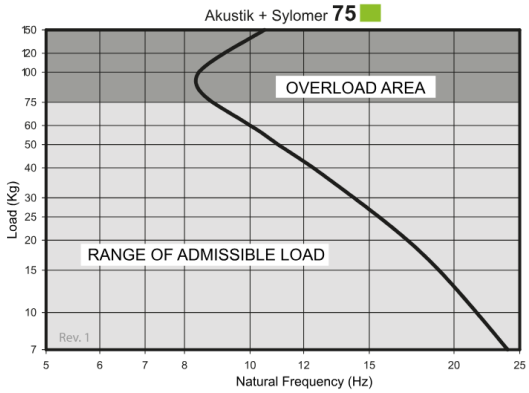

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.