

Akustik Lateral Acoustic Hanger

Elastomeric acoustic hanger for side mounting to walls or structural members where direct attachment to the overhead slab is not possible.




The **Akustik Lateral Acoustic Hanger** is designed for the resilient suspension of **acoustic ceilings and mechanical equipment**, particularly where side mounting to a wall, beam, or other structural member is required.

The hanger incorporates the same **high-performance elastomeric isolation element** used throughout the Akustik range, specifically designed to reduce the transmission of vibration and structure-borne noise. It is suitable for equipment operating above **1,000 rpm**.

The robust steel bracket is designed to withstand loads of up to **1,433 lb** and accommodates **1-1/2 x 1/2 in. ceiling channels**. The metal components are **zinc plated for corrosion protection** and long-term durability.




Drawings

Akustik Lateral A-45 Type C / Akustik Lateral B-60 Type C

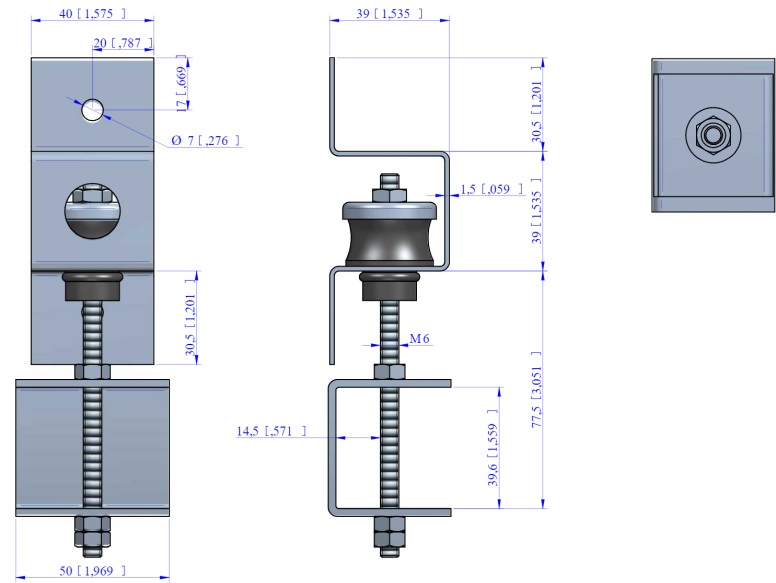

Type	SUMMARY	Max. Load(lbs)	Code	Weight(lbs)
Akustik Lateral A-45 Type C	-	66	25639	1
Akustik Lateral B-60 Type C	-	132	25640	0.3

Elastic properties

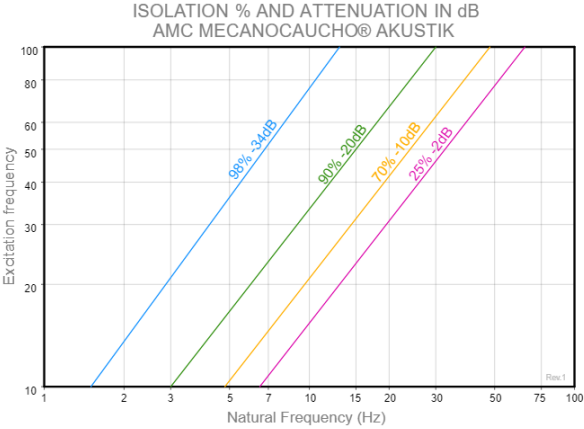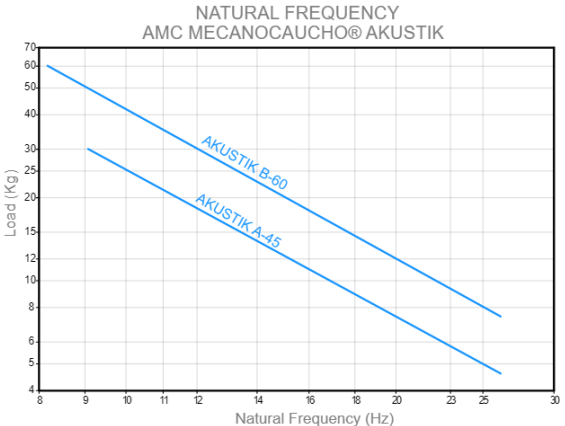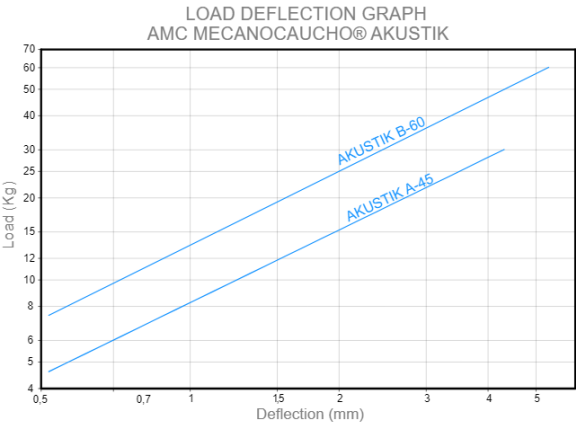

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com