Akustik Saw +Sylomer®

Acoustic hanger with integrated threaded connection for sawtooth profiles. High-performance Sylomer® vibration isolation for suspended building services.



The AMC-MECANOCAUCHO® Akustik Saw + Sylomer® range has been developed for the vibration isolation of suspended ceilings, HVAC services, pipework and suspended mechanical equipment using sawtooth ceiling profiles.

Its integrated threaded connection provides a compact and secure fixing solution while the Sylomer® microcellular polyurethane element effectively reduces the transmission of structure-borne vibration and noise. The range is available in two Sylomer® grades, allowing the isolator stiffness to be matched to the supported load for optimum acoustic performance.


A wide range of fixing accessories ensures fast installation and compatibility with different ceiling systems. Heavy-duty steel components withstand tensile loads from 650 kg to 1,000 kg and feature a corrosion-resistant finish for reliable long-term performance.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.


Drawings

Akustik Sierra + Sylomer®15 Type A / Akustik Saw + Sylomer®30 Type A

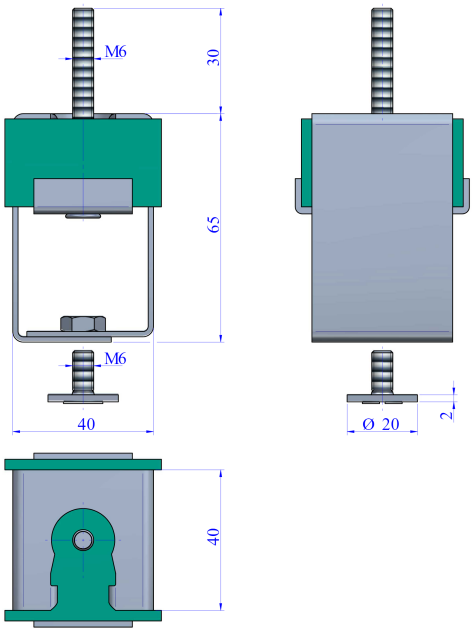

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Sierra + Sylomer®15 Type A	-	15	23197	0.133
Akustik Saw + Sylomer®30 Type A	-	30	23863	0.16

Akustik Saw + Sylomer®50 Type A

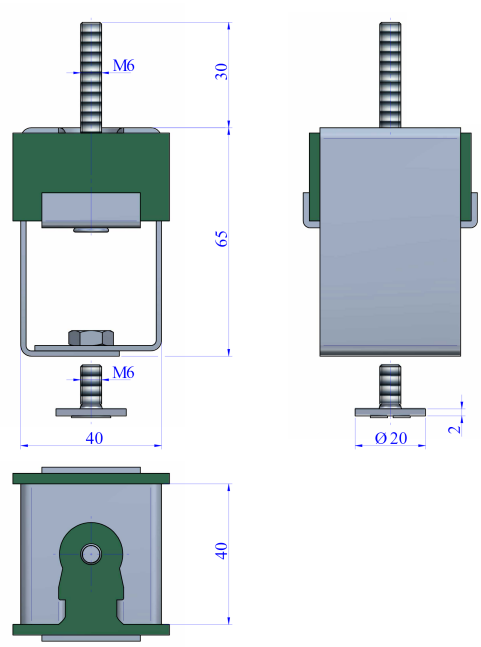


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Saw + Sylomer®50 Type A	-	50	23584	0.16

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Akustik Saw + Sylomer®75 Type A

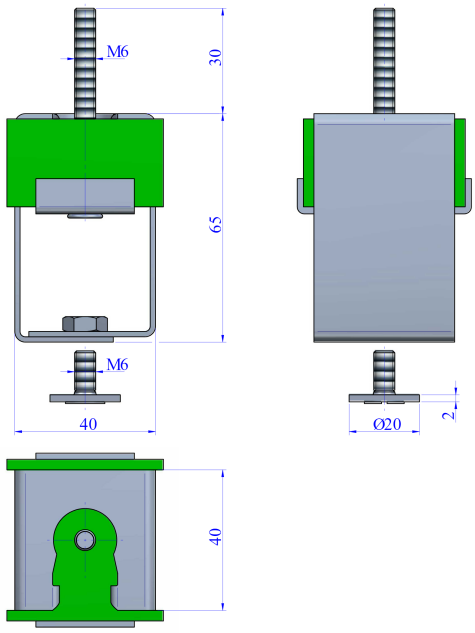


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Saw + Sylomer®75 Type A	-	75	23865	0.16

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Akustik Sierra + Sylomer®15 Type B / Akustik Saw + Sylomer®30 Type B

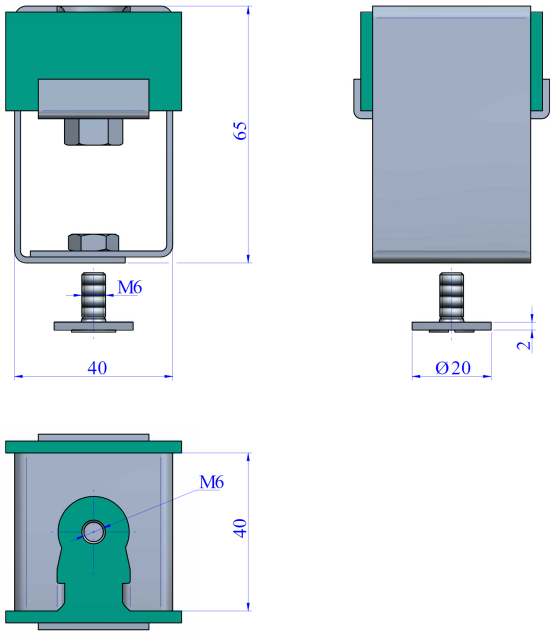

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Sierra + Sylomer®15 Type B	-	15	23198	0.133
Akustik Saw + Sylomer®30 Type B	-	30	23864	0.16

Akustik Saw + Sylomer®50 Type B

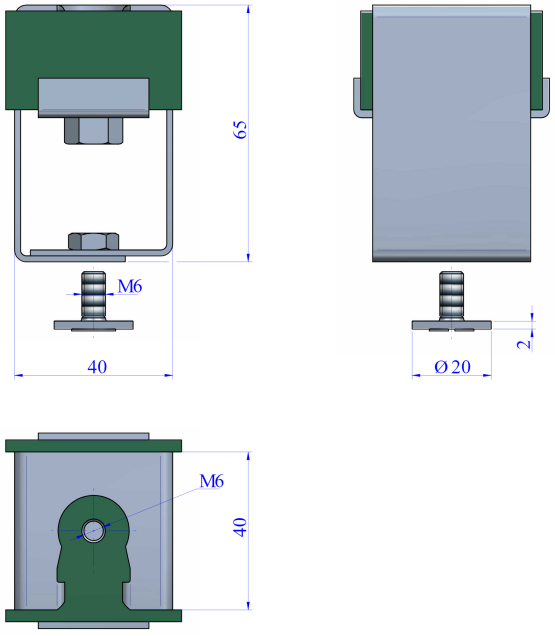


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Saw + Sylomer®50 Type B	-	50	23585	0.16

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Akustik Saw + Sylomer®75 Type B

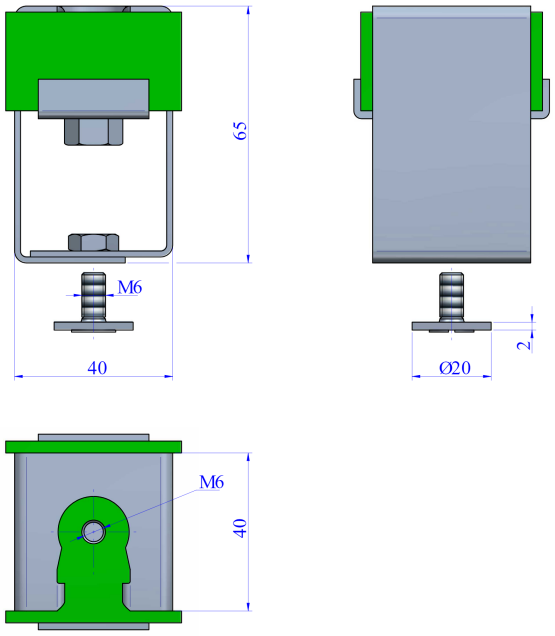

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Saw + Sylomer®75 Type B	-	75	23866	0.16


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

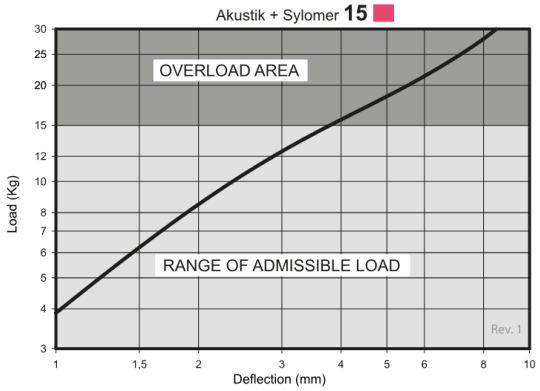


Akustik + Sylomer **30**

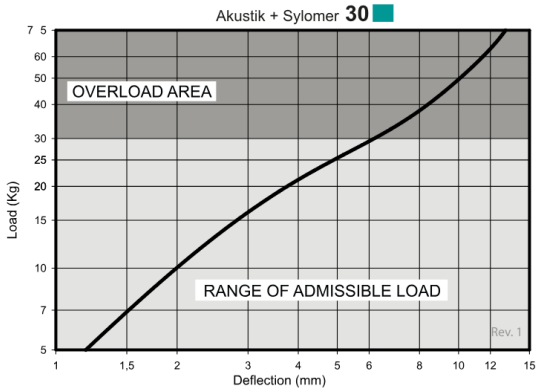

Akustik + Sylomer **50**

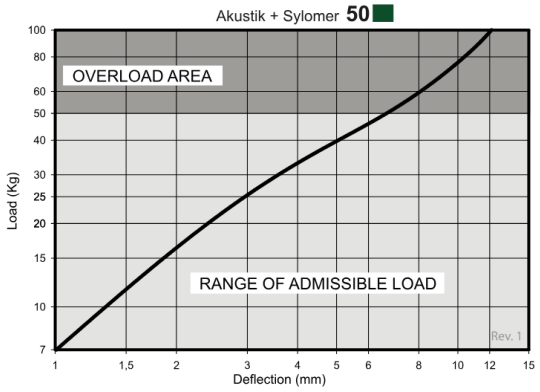


Akustik + Sylomer **75**

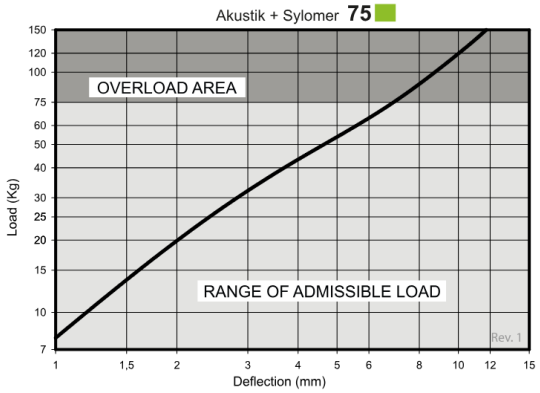


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

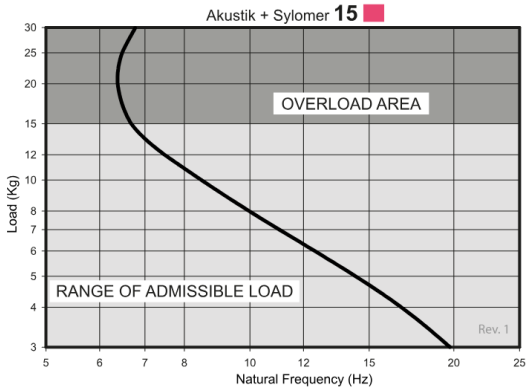


Akustik + Sylomer **30**

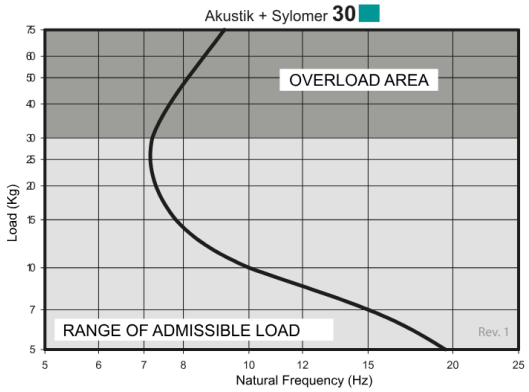

Akustik + Sylomer **50**

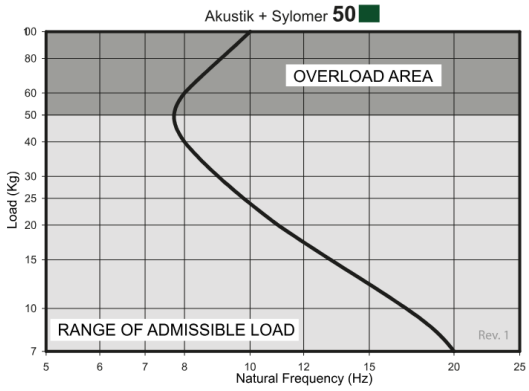

Akustik + Sylomer **75**

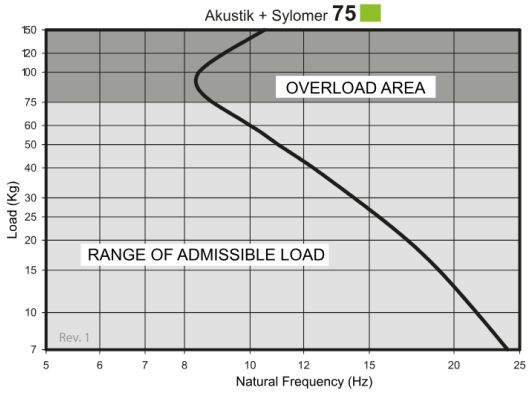

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Secure ceiling anchorage

With more than one fixing point to the overhead slab, it is particularly reliable for anchorages with low load-bearing capacity.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.