

Akustik Saw

Acoustic hanger for saw-tooth ceiling profiles. Fast, secure, tool-free installation. Load range: 8–60 kg.




The Akustik Saw range is designed for the suspension of acoustic ceilings and machinery operating above 1,000 rpm. Every model incorporates the same high-performance elastomer element, specifically engineered to provide effective vibration isolation and long-term mechanical reliability.

The steel housing is designed to support loads of up to 650 kg and is protected with a corrosion-resistant zinc-plated finish. Its tool-free fixing system enables fast, secure installation on Saw ceiling profiles.




Drawings

Akustik Saw A-45

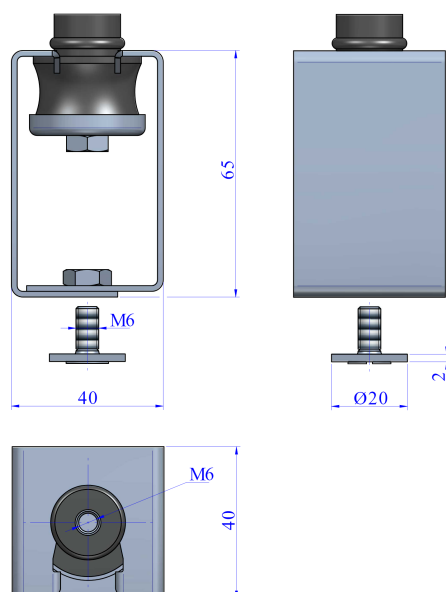




Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik Saw A-45	Fitted directly to ceiling using two holes.	8-30	23861	0.132

Akustik Saw B-60

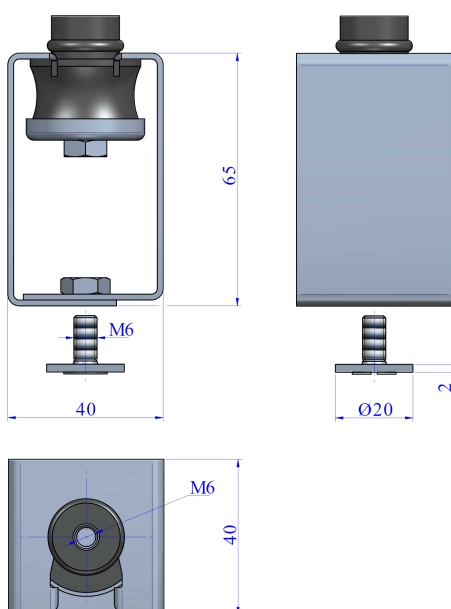

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik Saw B-60	Fitted directly to ceiling using two holes.	25-60	23862	0.132

Elastic properties

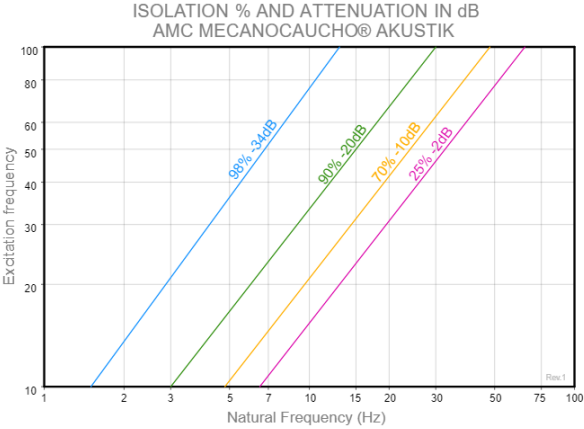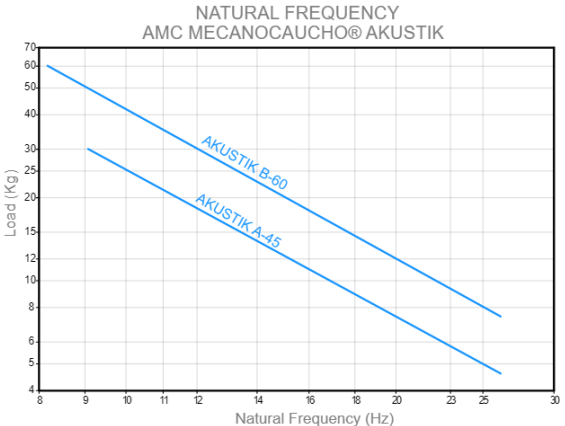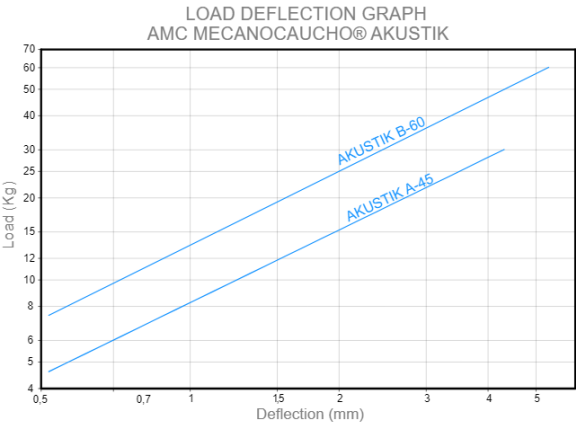

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com