
Akustik Slip Clip + Sylomer® Acoustic Clip

Compact acoustic clip with Sylomer® for Omega profiles of different widths. Ideal for suspended ceilings and wall assemblies where installation space is limited.

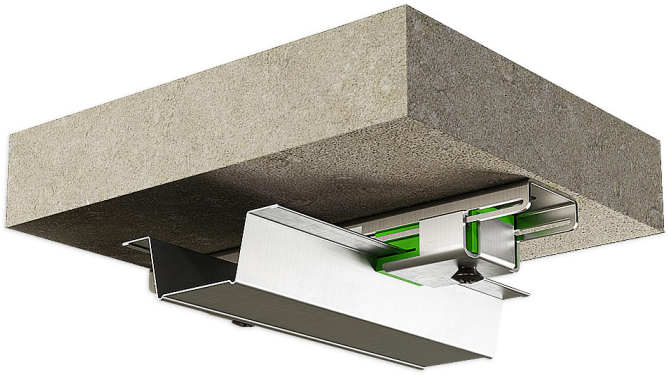

The Akustik Slip Clip + Sylomer® acoustic clip is designed for the vibration isolation of suspended ceilings and wall assemblies constructed with Omega profiles.

Its adjustable design accommodates Omega profiles of different widths, providing a versatile attachment system for a wide range of ceiling and wall configurations.


The Sylomer® elastic element effectively reduces the transmission of vibration and structure-borne noise to the supporting structure. Its compact design minimizes the required installation depth, making it particularly suitable for projects where available space is limited.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings

Akustik Slip Clip + Sylomer 8 / Akustik Slip Clip + Sylomer 15 / Akustik Slip Clip + Sylomer 30

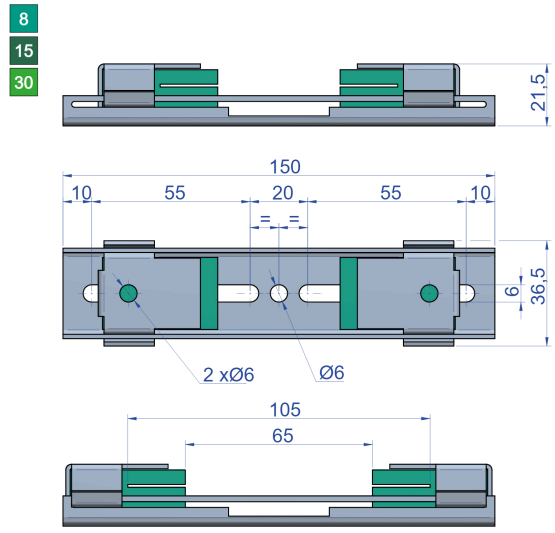

MAX. EXTENSION

MAX. CHANNEL WIDTH = 82
MIN. CHANNEL WIDTH = 63,5

Type	Max. Load (lbs)	Code	Weight(lbs)
Akustik Slip Clip + Sylomer 8	18	23835	0.26
Akustik Slip Clip + Sylomer 15	33	23628	0.26
Akustik Slip Clip + Sylomer 30	66	23688	0.26

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Technical characteristics

- Elastic **Sylomer® element** to reduce the transmission of vibration and structure-borne noise.
- Compatible with **Omega profiles of different widths**.
- Compact design to **minimise ceiling height loss**.
- Suitable for the **acoustic decoupling of suspended ceilings and wall linings with metal framing**.

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Excellent value

This mount delivers very high performance for its cost compared to other possible solutions.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.