Springtec Type 1

Spring hanger for suspended ceilings with double structural fixing, low natural frequency, and excellent stability.

The Springtec Type 1 range is designed for the suspension of acoustic ceilings and machinery operating above 450 rpm. Each hanger incorporates a high-quality steel spring engineered to provide excellent low-frequency vibration isolation. The spring is guided by two elastomer elements with integrated overload stops, preventing coil contact under excessive loads while ensuring long-term reliability and stable performance.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 07/11/2026.

Drawings

Springtec ST-5 Type 1 / Springtec ST-10 Type 1 / Springtec ST-20 Type 1 / Springtec ST-30 Type 1 / Springtec ST-60 Type 1

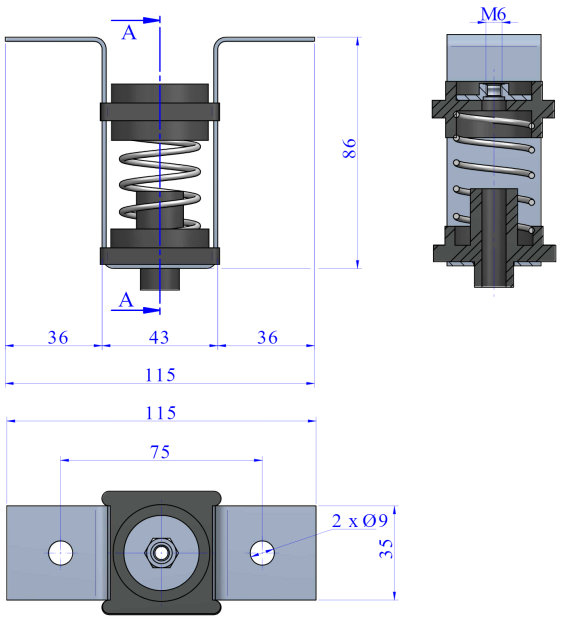

Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec ST-5 Type 1	5	Silver	23313	0.166
Springtec ST-10 Type 1	10	White	23301	0.166
Springtec ST-20 Type 1	20	Yellow	23302	0.171
Springtec ST-30 Type 1	30	Blue	23303	0.173
Springtec ST-60 Type 1	60	Magenta	23304	0.174

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 07/11/2026.

Springtec ST-5 Type 1 UK / Springtec ST-10 Type 1 UK / Springtec ST-20 Type 1 UK / Springtec ST-30 Type 1 UK / Springtec ST-60 Type 1 UK

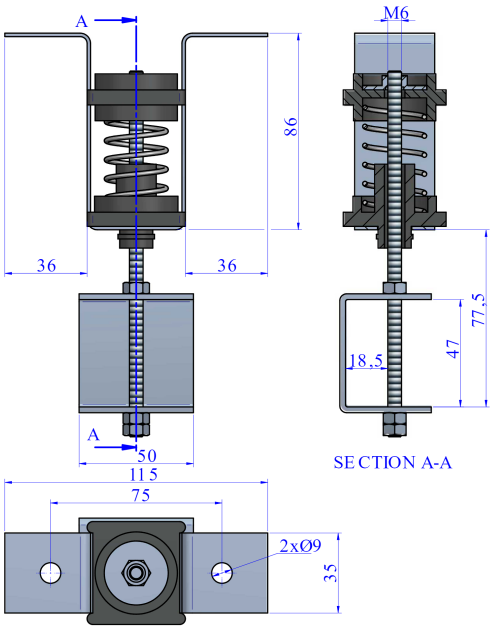

Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec ST-5 Type 1 UK	5	Silver	25311	0
Springtec ST-10 Type 1 UK	10	White	25312	0
Springtec ST-20 Type 1 UK	20	Yellow	25313	0
Springtec ST-30 Type 1 UK	30	Blue	25314	0
Springtec ST-60 Type 1 UK	60	Magenta	25315	0

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 07/11/2026.

Elastic properties

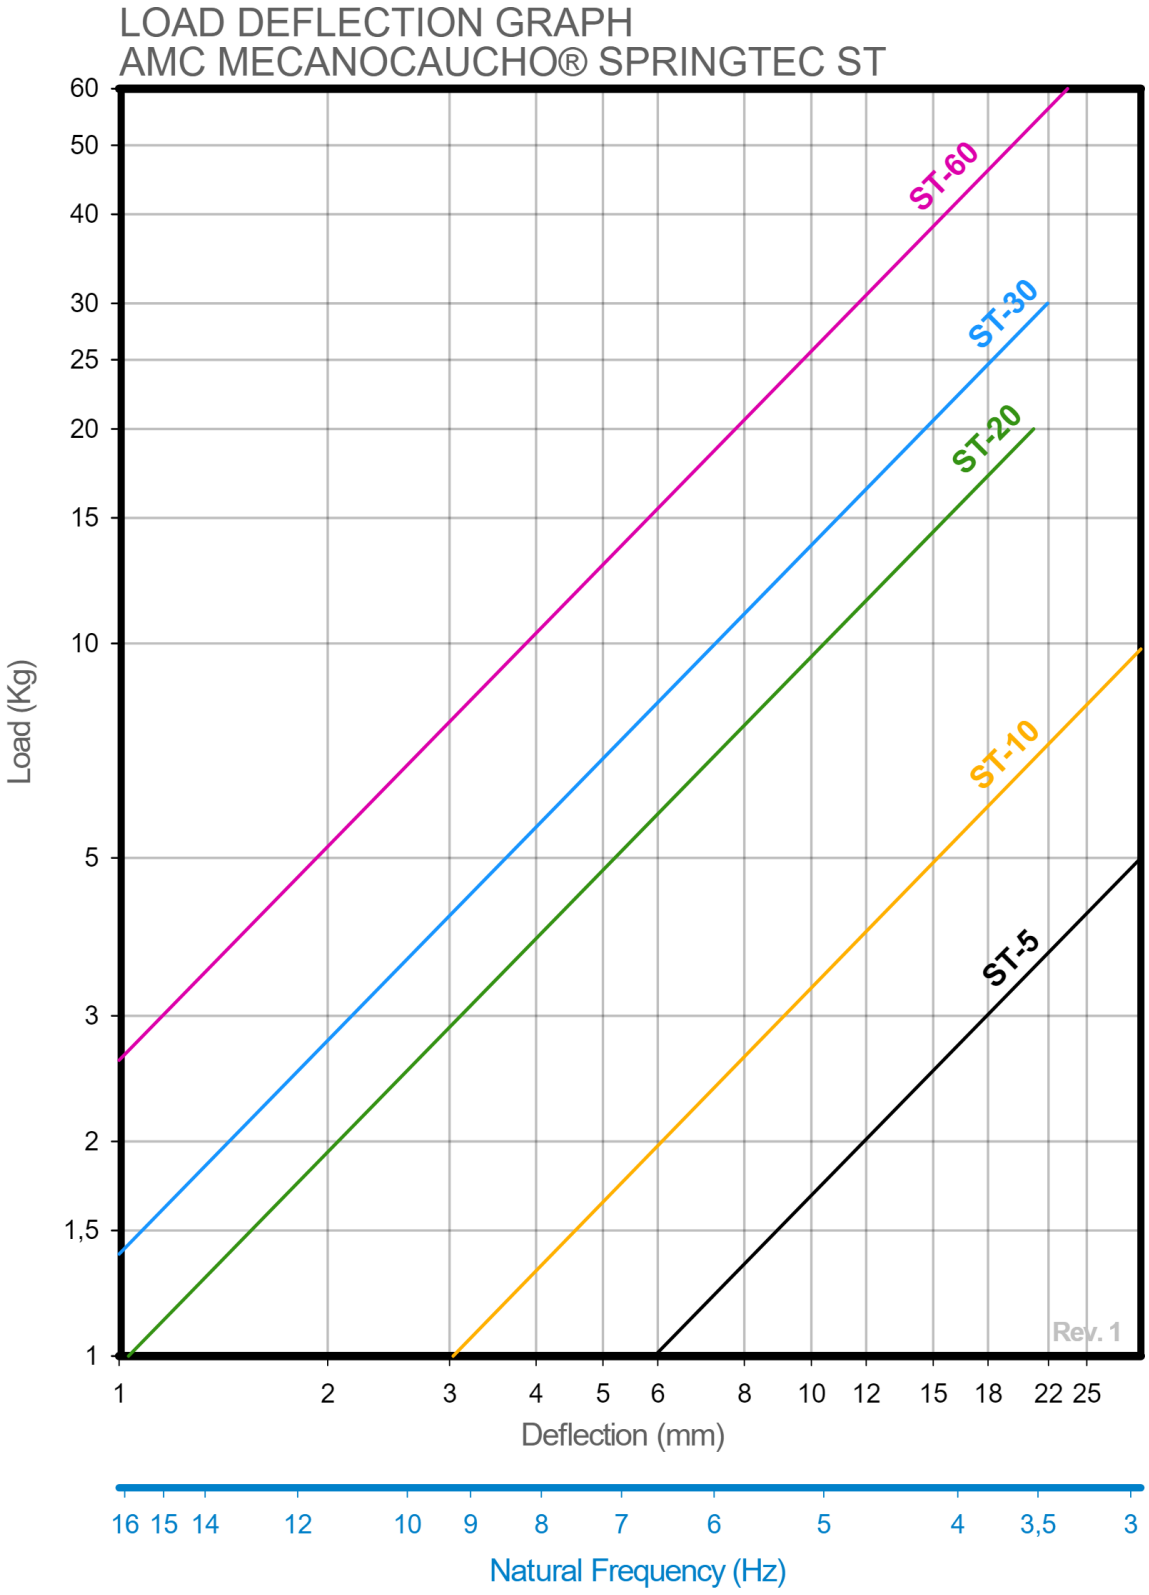

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 07/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

Secure ceiling anchorage

With more than one fixing point to the overhead slab, it is particularly reliable for anchorages with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 07/11/2026.