

Springtec Type 1

Spring hanger for suspended ceilings with double structural fixing, low natural frequency, and excellent stability.




The Springtec Type 1 range is designed for the suspension of acoustic ceilings and machinery operating above 450 rpm. Each hanger incorporates a high-quality steel spring engineered to provide excellent low-frequency vibration isolation. The spring is guided by two elastomer elements with integrated overload stops, preventing coil contact under excessive loads while ensuring long-term reliability and stable performance.




Drawings

Springtec ST-5 Type 1 / Springtec ST-10 Type 1 / Springtec ST-20 Type 1 / Springtec ST-30 Type 1 / Springtec ST-60 Type 1

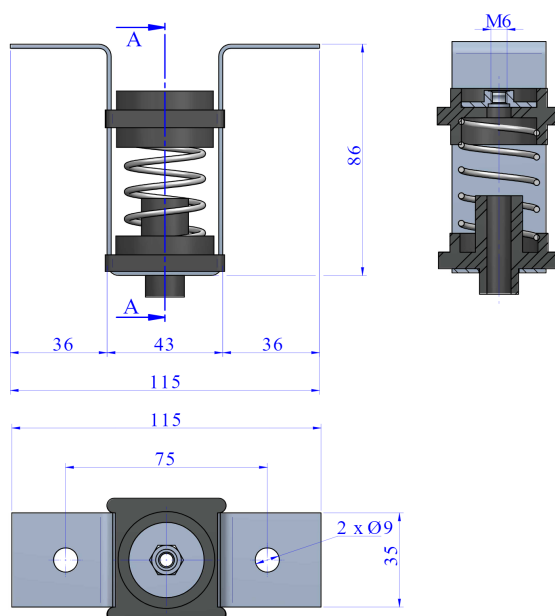


Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec ST-5 Type 1	5	Silver	23313	0.166
Springtec ST-10 Type 1	10	White	23301	0.166
Springtec ST-20 Type 1	20	Yellow	23302	0.171
Springtec ST-30 Type 1	30	Blue	23303	0.173
Springtec ST-60 Type 1	60	Magenta	23304	0.174

**Springtec ST-5 Type 1 UK / Springtec ST-10 Type 1 UK / Springtec ST-20 Type 1 UK /
Springtec ST-30 Type 1 UK / Springtec ST-60 Type 1 UK**

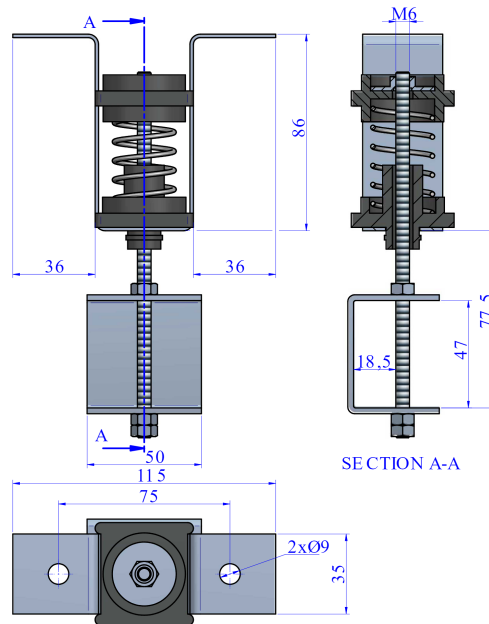

Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec ST-5 Type 1 UK	5	Silver	25311	0
Springtec ST-10 Type 1 UK	10	White	25312	0
Springtec ST-20 Type 1 UK	20	Yellow	25313	0
Springtec ST-30 Type 1 UK	30	Blue	25314	0
Springtec ST-60 Type 1 UK	60	Magenta	25315	0

Elastic properties

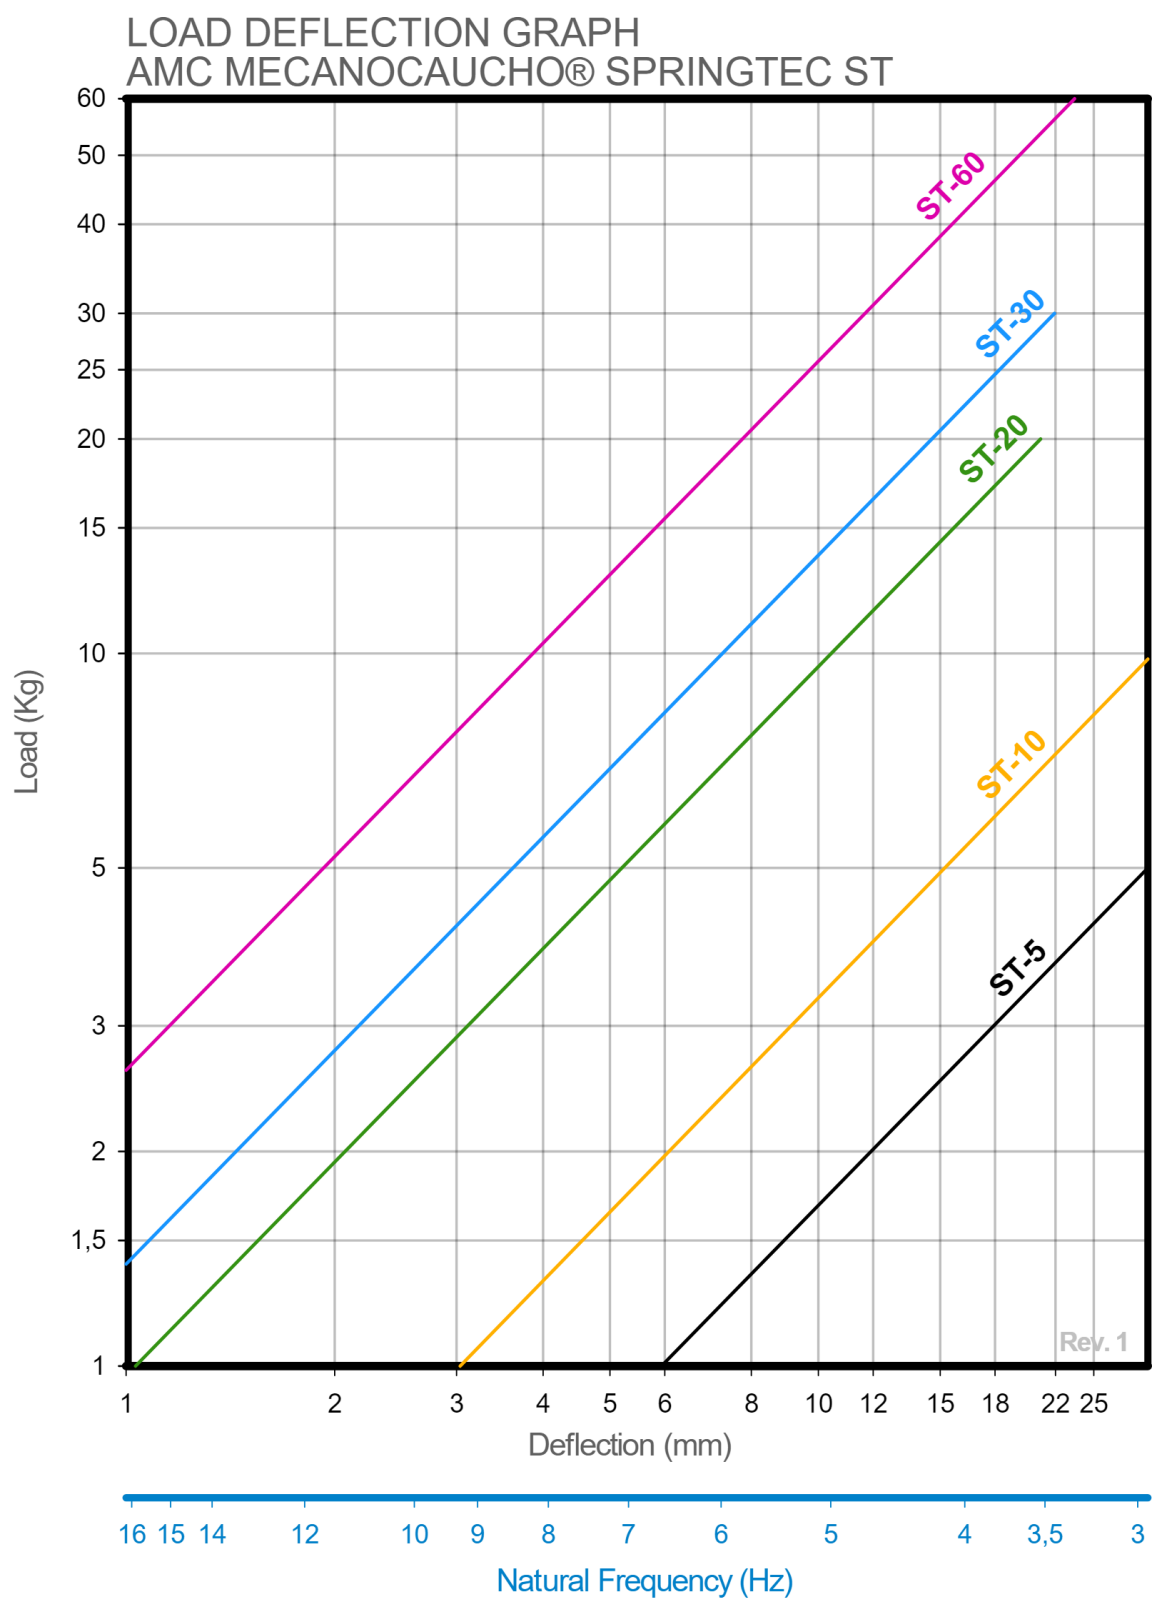

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com