

Springtec Type 2

Support with metal spring and closed window. Firm fixing with screw to the concrete. Low frequency insulation.



The Springtec Type 2 range is designed for the suspension of acoustic ceilings and machinery operating above 450 rpm. Each hanger incorporates a high-quality steel spring engineered to provide excellent low-frequency vibration isolation.

The spring is guided by two elastomer elements with integrated overload stops, preventing coil contact under excessive loads while ensuring stable performance and long-term reliability.

Its enclosed housing and direct concrete fixing provide a robust and secure installation for demanding applications.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain


Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

Drawings

Springtec ST-5 Type 2 / Springtec ST-10 Type 2 / Springtec ST-20 Type 2 / Springtec ST-30 Type 2 / Springtec ST-60 Type 2

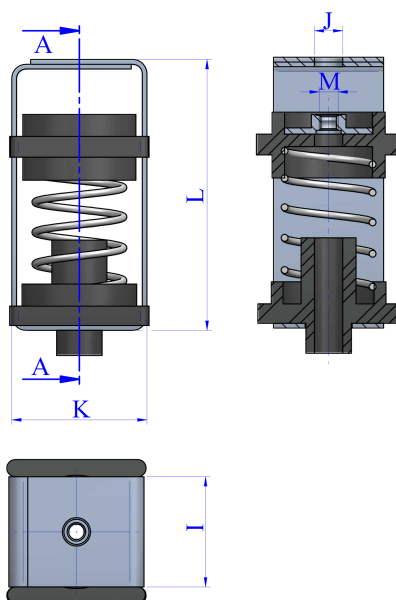

Type	Max. Permanent Load (kg)	Spring color	Code	l(mm)	J(mm)	K(mm)	L(mm)	M	Weight(kg)
Springtec ST-5 Type 2	5	Silver	23314	35	Ø 9	43	86	M-6	0.164
Springtec ST-10 Type 2	10	White	23330	35	Ø 9	43	86	M-8	0.162
			23305	35	Ø 9	43	86	M-6	0.164
Springtec ST-20 Type 2	20	Yellow	23332	35	Ø 9	43	86	M-8	0.162
			23307	35	Ø 9	43	86	M-6	0.167
Springtec ST-30 Type 2	30	Blue	23325	35	Ø 9	43	86	M-8	0.162
			23309	35	Ø 9	43	86	M-6	0.162
Springtec ST-60 Type 2	60	Magenta	23324	35	Ø 9	43	86	M-8	0.198
			23311	35	Ø 9	43	86	M-6	0.198




AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

**Springtec ST-5 Type 2 UK / Springtec ST-10 Type 2 UK / Springtec ST-20 Type 2 UK /
Springtec ST-30 Type 2 UK / Springtec ST-60 Type 2 UK**

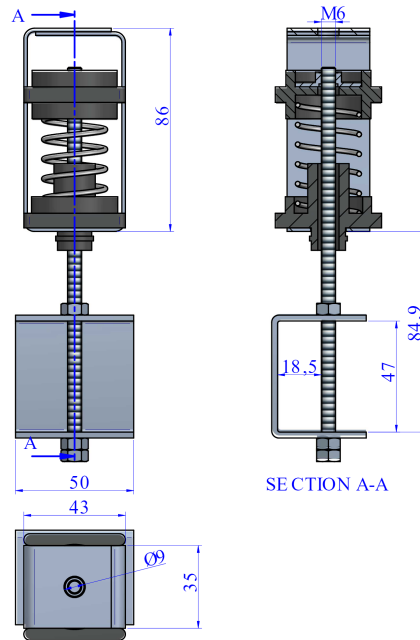

Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec ST-5 Type 2 UK	5	Silver	25316	0
Springtec ST-10 Type 2 UK	10	White	25317	0
Springtec ST-20 Type 2 UK	20	Yellow	25318	0
Springtec ST-30 Type 2 UK	30	Blue	25319	0
Springtec ST-60 Type 2 UK	60	Magenta	25320	0

Elastic properties

