Springtec Type 2

Support with metal spring and closed window. Firm fixing with screw to the concrete. Low frequency insulation.

The Springtec Type 2 range is designed for the suspension of acoustic ceilings and machinery operating above 450 rpm. Each hanger incorporates a high-quality steel spring engineered to provide excellent low-frequency vibration isolation.

The spring is guided by two elastomer elements with integrated overload stops, preventing coil contact under excessive loads while ensuring stable performance and long-term reliability.

Its enclosed housing and direct concrete fixing provide a robust and secure installation for demanding applications.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.

Drawings

Springtec ST-5 Type 2 Type C / Springtec ST-10 Type 2 Type C / Springtec ST-20 Type 2 Type C / Springtec ST-30 Type 2 Type C / Springtec ST-60 Type 2 Type C

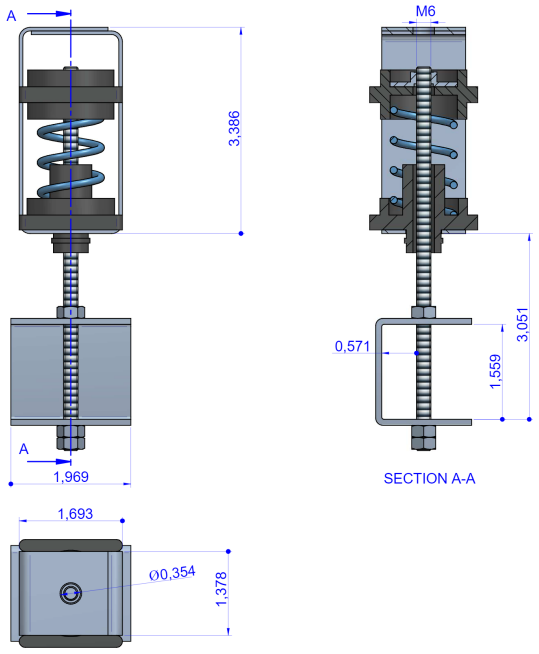

Type	Max. Permanent Load (lbs)	Spring color	Code	Weight(lbs)
Springtec ST-5 Type 2 Type C	11	Silver	25582	0
Springtec ST-10 Type 2 Type C	22	White	25583	0
Springtec ST-20 Type 2 Type C	44	Yellow	25584	0
Springtec ST-30 Type 2 Type C	66	Blue	25585	0
Springtec ST-60 Type 2 Type C	132	Magenta	25586	0

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.

Elastic properties

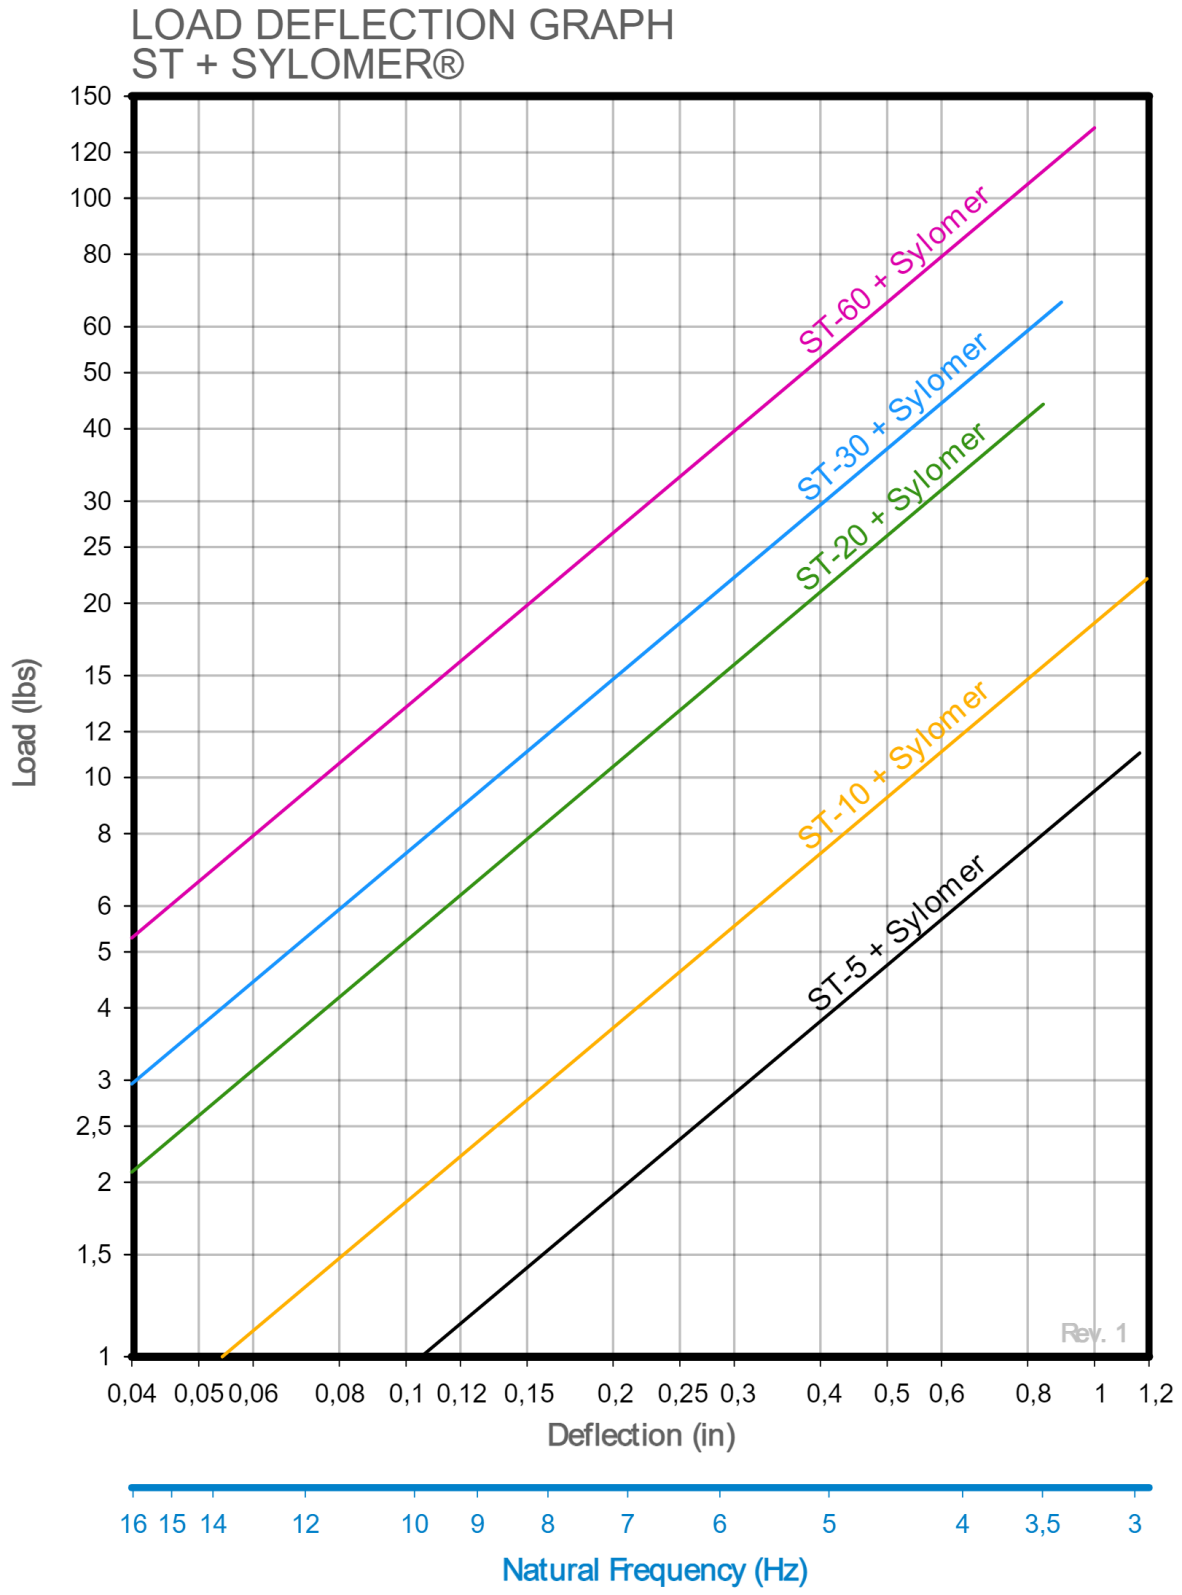

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Improved isolation

It offers improved isolation compared to conventional anti-vibration mounts of similar geometry.

Secure ceiling anchorage

With more than one attachment point to the overhead slab, it is particularly reliable for anchors with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.