

Springtec Lateral

Lateral spring hanger for wall and beam mounting. Excellent low-frequency vibration isolation with versatile installation options.



The Springtec Lateral range is designed for the suspension of acoustic ceilings and machinery operating above 450 rpm where lateral mounting is required. Each hanger incorporates a high-quality steel spring engineered to provide excellent low-frequency vibration isolation.


The spring is guided by two elastomer elements with integrated overload stops, preventing coil contact under excessive loads while ensuring stable performance and long-term reliability.

Its lateral mounting configuration makes it ideal for wall and beam installations where conventional vertical hangers cannot be used.




Drawings

Springtec Lateral ST-5 / Springtec Lateral ST-10 / Springtec Lateral ST-20 / Springtec Lateral ST-30 / Springtec Lateral ST-60

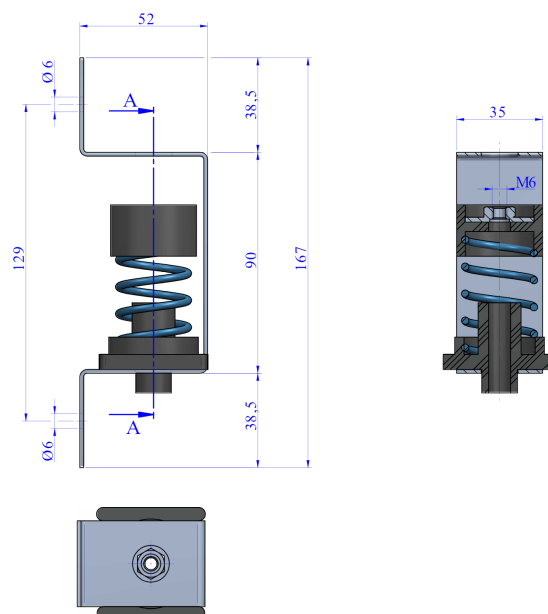

Type	Max. Permanent Load (kg)	Spring color	Code	Weight(kg)
Springtec Lateral ST-5	5	Silver	23428	0.151
Springtec Lateral ST-10	10	White	23406	23406
Springtec Lateral ST-20	20	Yellow	23407	23407
Springtec Lateral ST-30	30	Blue	23408	23408
Springtec Lateral ST-60	60	Magenta	23409	23409

Elastic properties

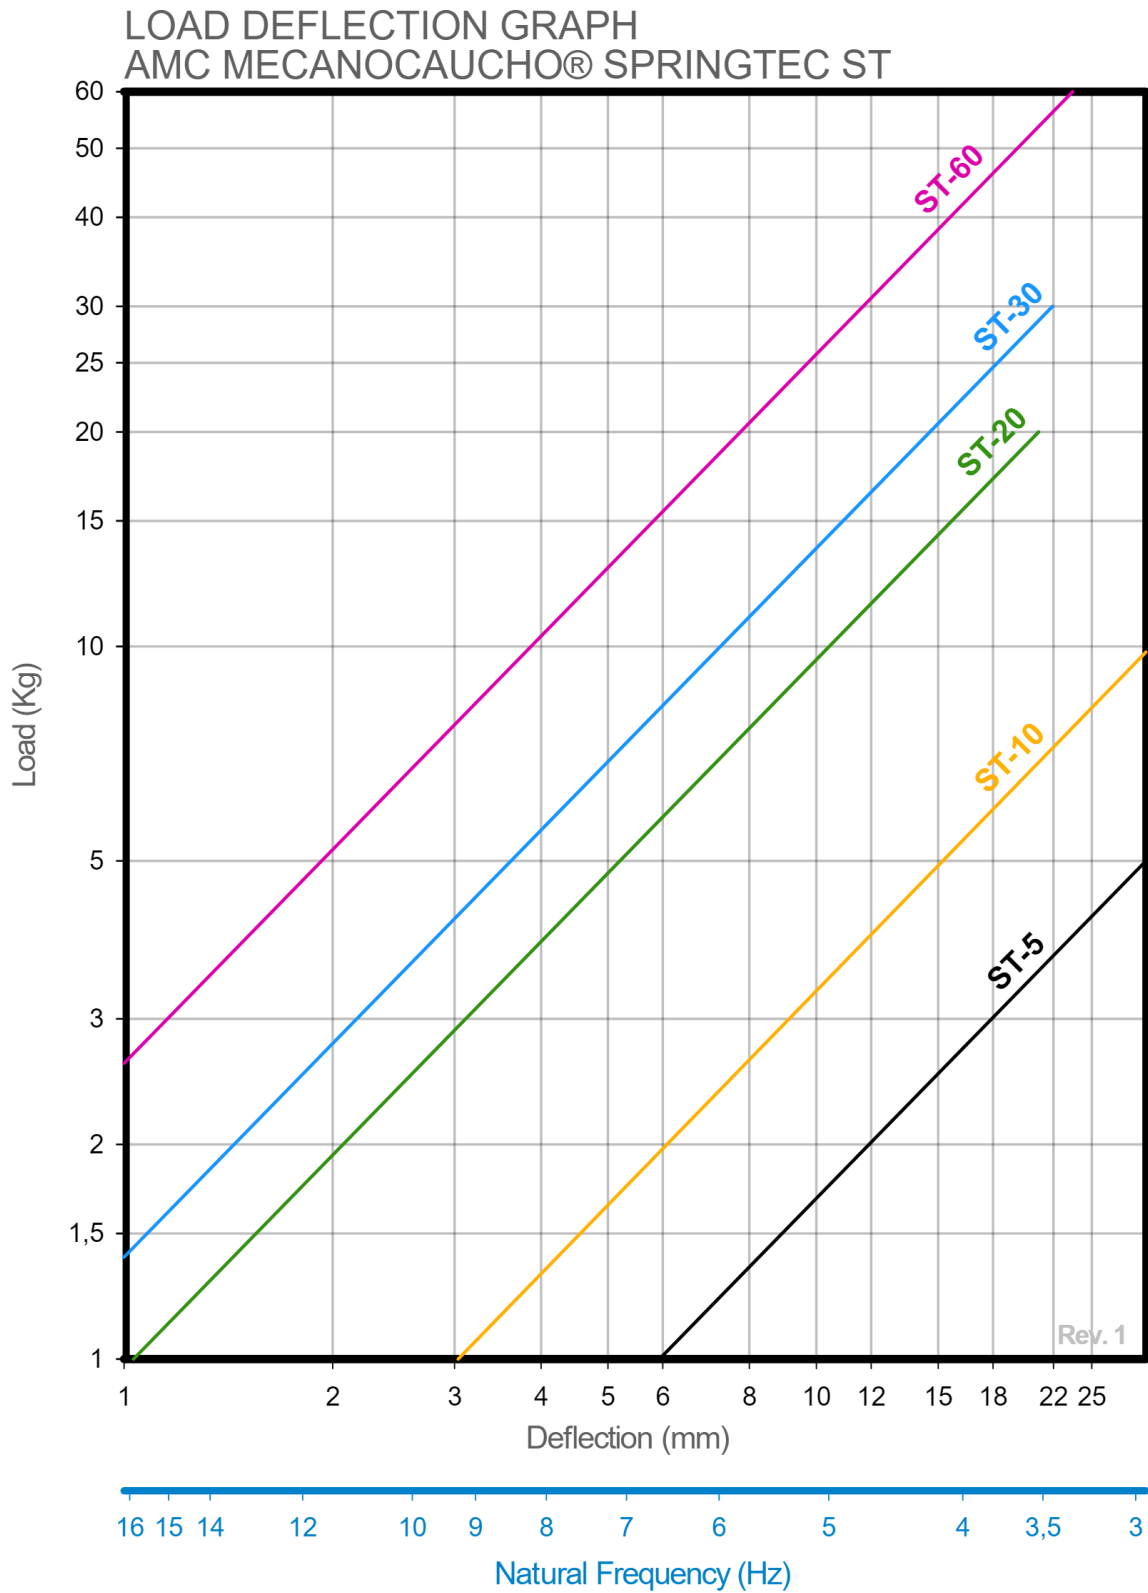

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com