


Akustik Super T47 + Sylomer®

Sylomer® acoustic hanger for T47 ceiling profiles. Fast, secure clip-on installation with outstanding vibration isolation.

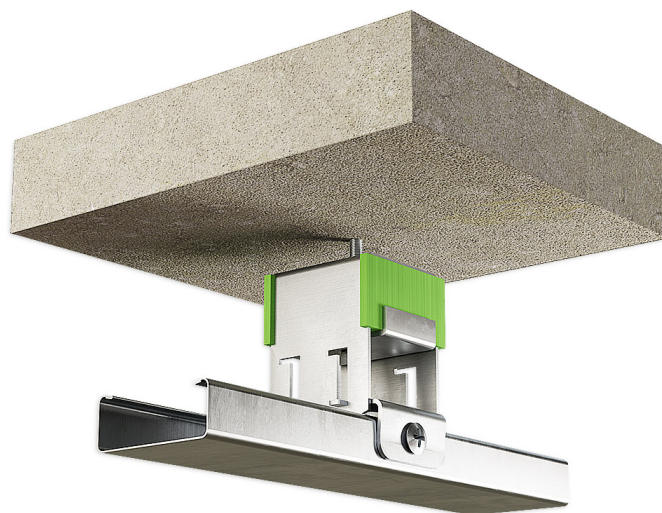

The Akustik Super T47 + Sylomer® range is designed for the suspension of acoustic ceilings, vibrating piping, and suspended machinery.


The integrated Sylomer® microcellular polyurethane element provides outstanding low-frequency vibration isolation, delivering significantly higher isolation performance than conventional rubber or cork isolators.

Its reinforced clip-on design enables fast, secure installation on 45–47 mm T-grid ceiling profiles while ensuring reliable long-term performance in demanding applications.




Drawings

Akustik Super T-47 + Sylomer®15 Type A / Akustik Super T47 + Sylomer®30 Type A

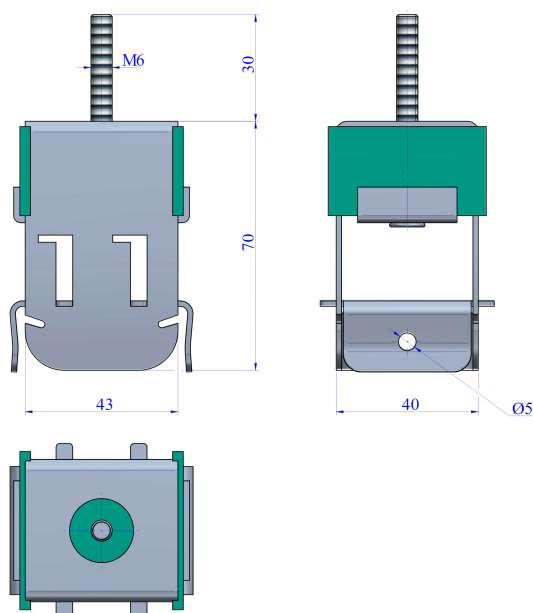


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Super T-47 + Sylomer®15 Type A	Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	15	23193	0.133
	Akustik Super T47 + Sylomer®30 Type A	Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	30	23821

Akustik Super T47 + Sylomer®50 Type A

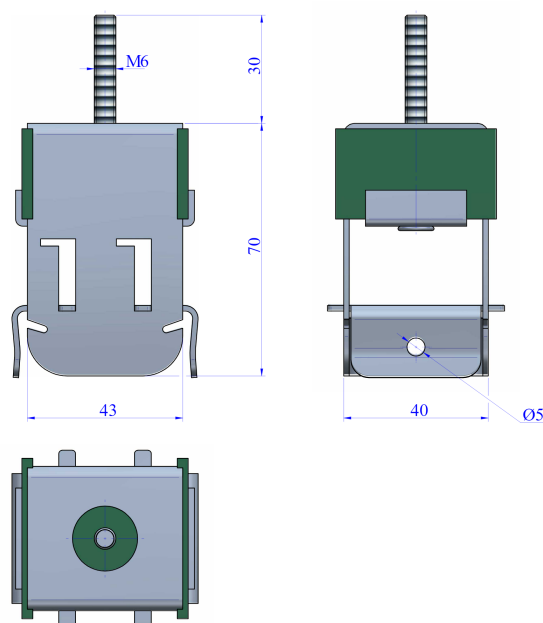


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Super T47 + Sylomer®50 Type A	Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	50	23588	0.17

Akustik Super T47 + Sylomer®75 Type A

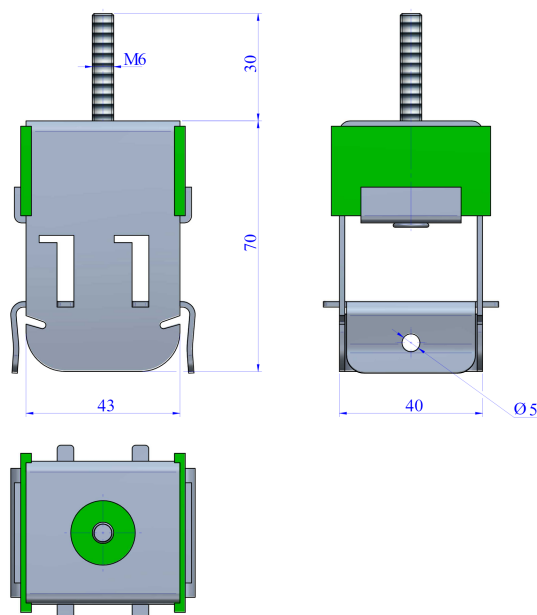


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Super T47 + Sylomer®75 Type A	Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	75	23841	0.18

Akustik Super T-47 + Sylomer®15 Type B / Akustik Super T47 + Sylomer®30 Type B

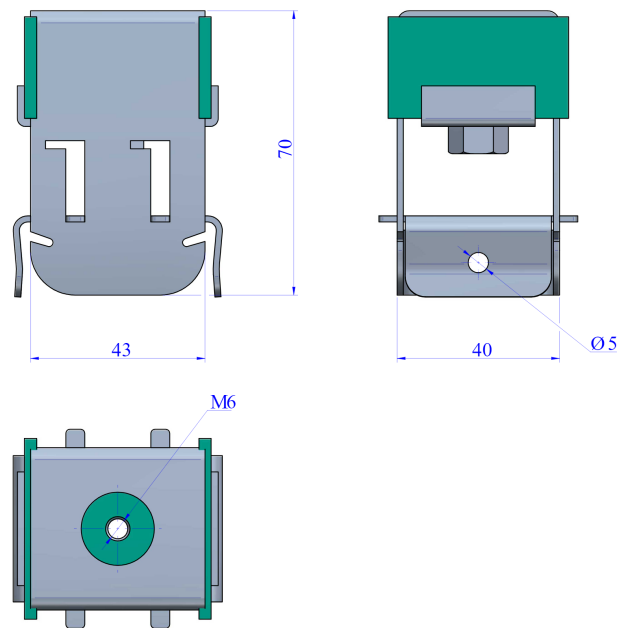


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Super T-47 + Sylomer®15 Type B	Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	15	23194	0.133
	Akustik Super T47 + Sylomer®30 Type B	Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	30	23822

Akustik Super T47 + Sylomer®50 Type B

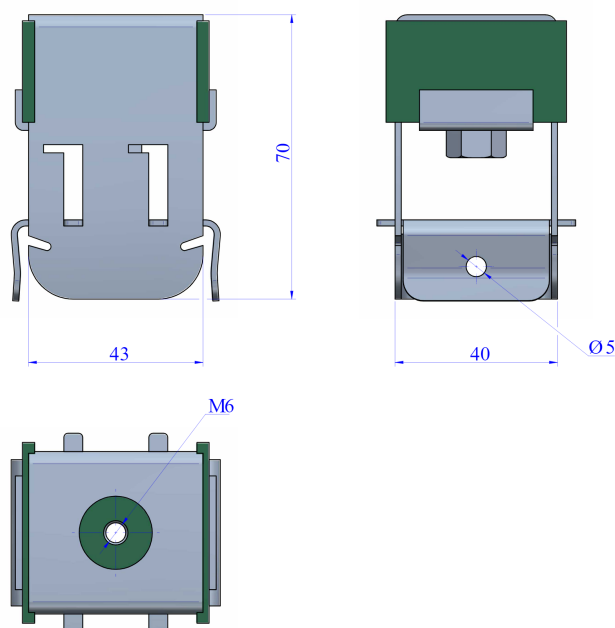

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Super T47 + Sylomer®50 Type B	Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	50	23589	0.166





Akustik Super T47 + Sylomer®75 Type B

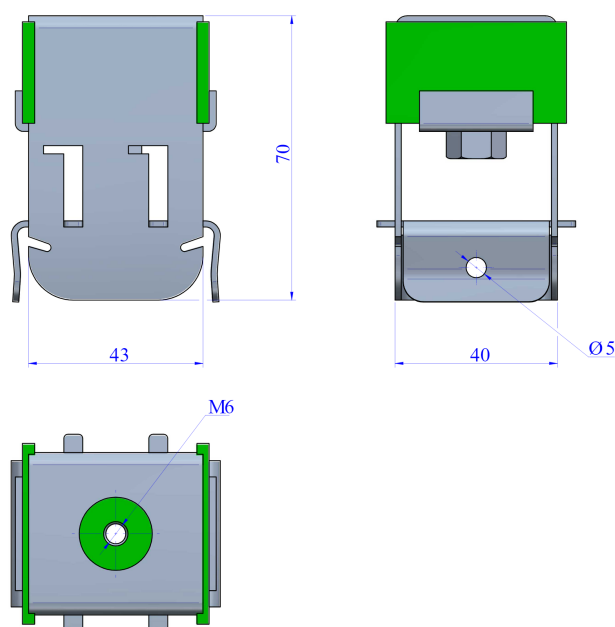





Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
Akustik Super T47 + Sylomer®75 Type B	Metal armor of the Akustik Super secured Metal armor of the Akustik Super secured to the ceiling by an M6 screw.	75	23842	0.175

Elastic properties

LOAD DEFLECTION GRAPHS

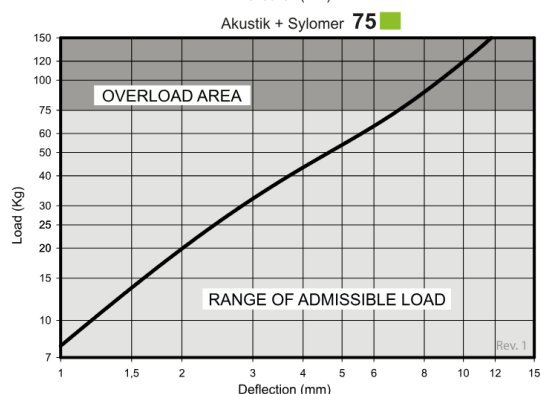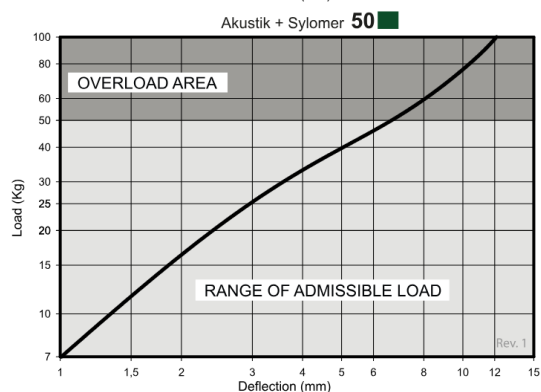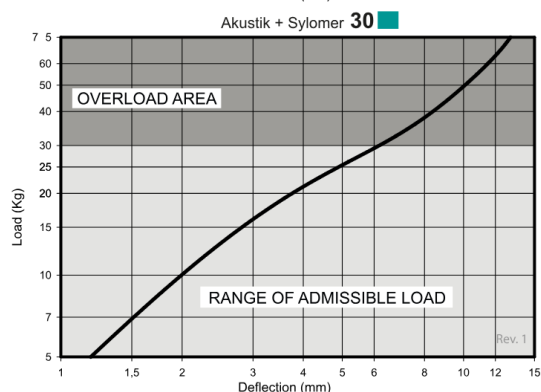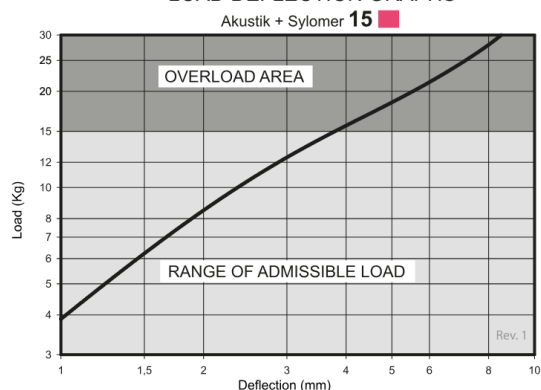

NATURAL FREQUENCY GRAPHS

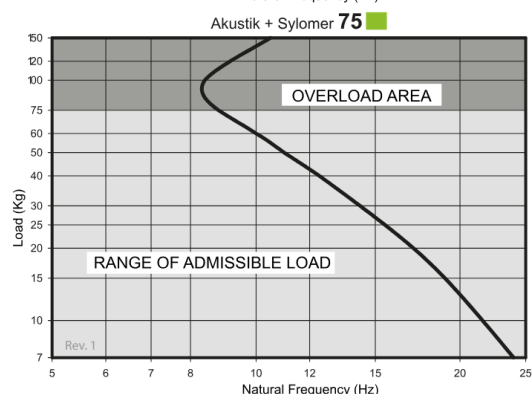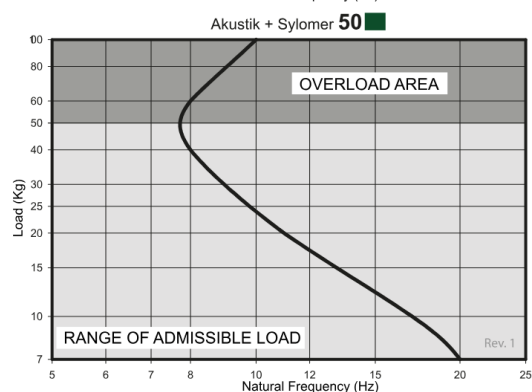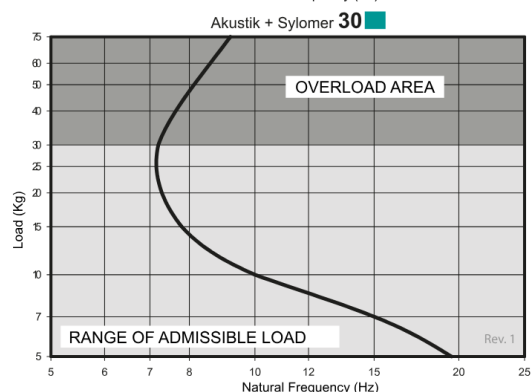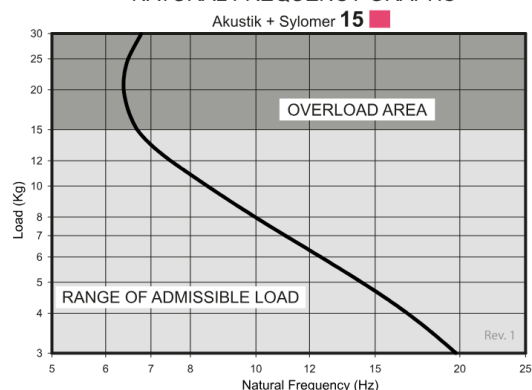

Technical characteristics

These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application. A great variety of fixing metal armors and elements facilitate installation and adapt better to each type of job. Their rugged metal parts withstand tensile stresses from 650 kg to 1000 kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.