

Akustik Super T60 Nonius +Sylomer®

Side-mounted acoustic hanger with Nonius connection and double Omega fixing. Secure installation with high-performance Sylomer® vibration isolation.




The AMC-MECANOCAUCHO® Akustik Nonius Lateral + Sylomer® range has been developed for the vibration isolation of suspended ceilings, pipework and suspended mechanical equipment where a lateral fixing arrangement is required.

Its side-mounted design, combined with the Nonius connection and double Omega fixing, provides a secure and stable suspension even in demanding installation conditions. The integrated Sylomer® microcellular polyurethane element effectively reduces the transmission of vibration and structure-borne noise, providing high and reliable long-term isolation performance.

The robust design and corrosion-resistant heavy-duty steel components provide high mechanical strength and long service life. Different Sylomer® grades are available to match the stiffness of the isolator to the supported load and optimise vibration isolation performance for each application.

Drawings




Akustik Super T60 Nonius + Sylomer®15 / Akustik Super T60 Nonius + Sylomer®30 / Akustik Super T60 Nonius + Sylomer®50

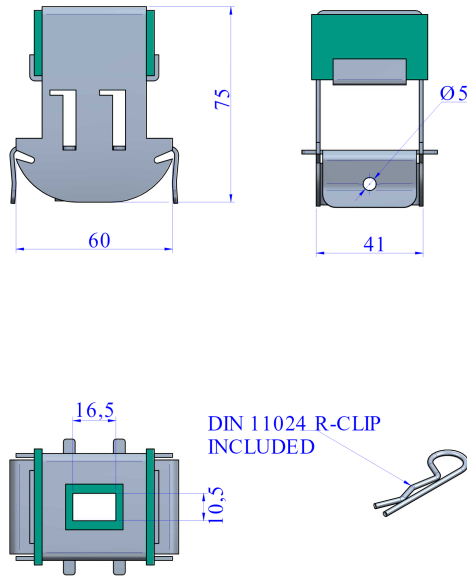




Type	Code
Akustik Super T60 Nonius + Sylomer®15	23693
Akustik Super T60 Nonius + Sylomer®30	23695
Akustik Super T60 Nonius + Sylomer®50	23697

Elastic properties

LOAD DEFLECTION GRAPHS

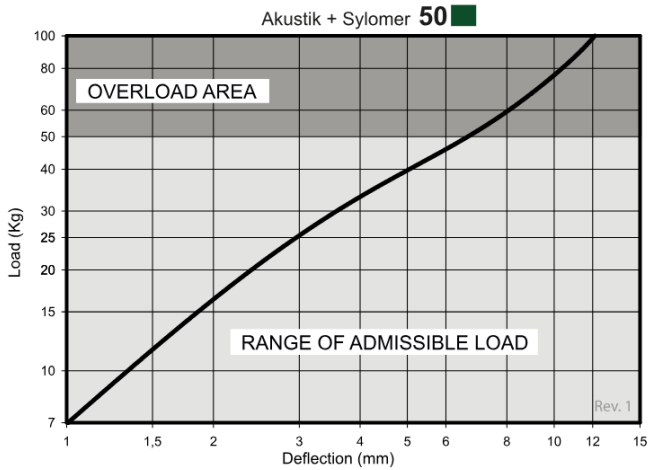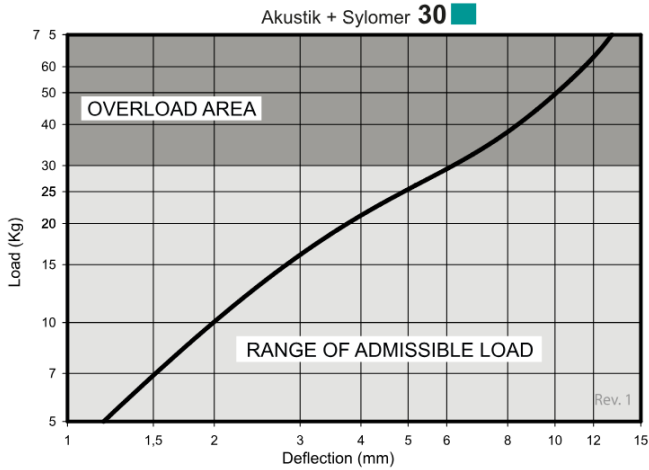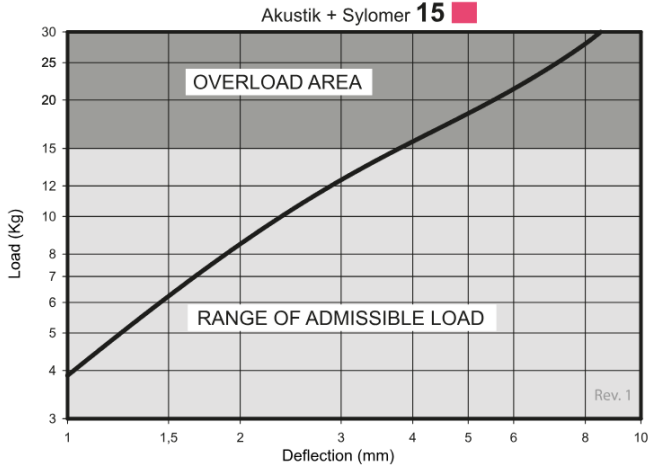

NATURAL FREQUENCY GRAPHS

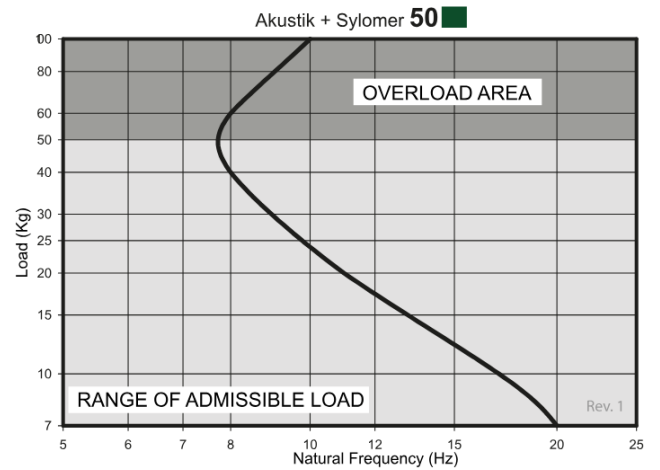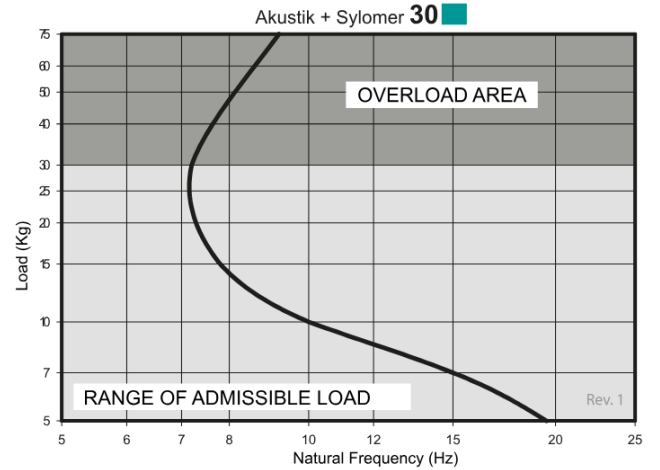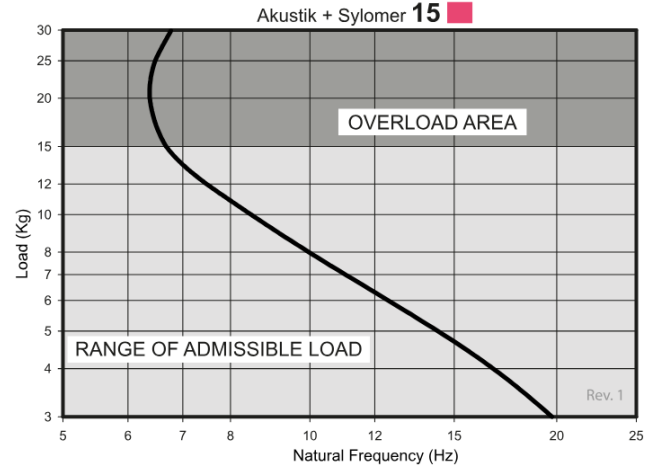

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com