


Akustik Super T60 +Sylomer®

Acoustic hanger for T60 ceiling grids with CD6027 Super clip. Tool-free installation and high-performance Sylomer® vibration isolation.

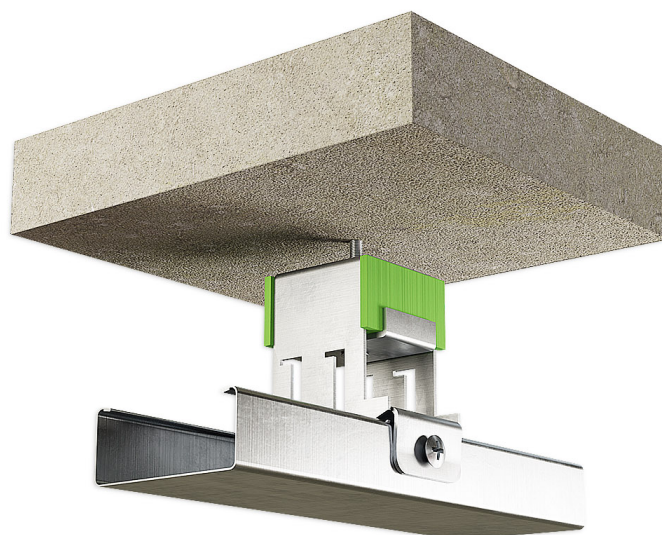

The AMC-MECANOCAUCHO® Akustik Super T60 + Sylomer® range has been specifically developed for CD6027suspended ceiling grids in demanding building acoustics applications.


Its Super clip system enables fast, tool-free installation while the integrated Sylomer® microcellular polyurethane element effectively reduces the transmission of structure-borne vibration and noise. Compared with conventional rubber or cork isolators, Sylomer® provides superior long-term performance and vibration isolation.

Like all AMC acoustic hangers, the Akustik Super T60 + Sylomer® is available in several load ranges. It is offered with either an **internal thread (Type B)** or an **integrated threaded rod (Type A)**, with both **M6 and M8 thread sizes** available for each version.

Ideal for suspended ceilings, HVAC services, pipework and lightweight mechanical equipment, the Akustik Super T60 + Sylomer® combines quick installation, reliable fixing and outstanding acoustic performance in commercial and industrial buildings.


Drawings

Akustik Super T-60 + Sylomer®15 Type A / Akustik Super T60 + Sylomer®30 Type A / Akustik Super T60 + Sylomer®50 Type A / Akustik Super T60 + Sylomer®75 Type A

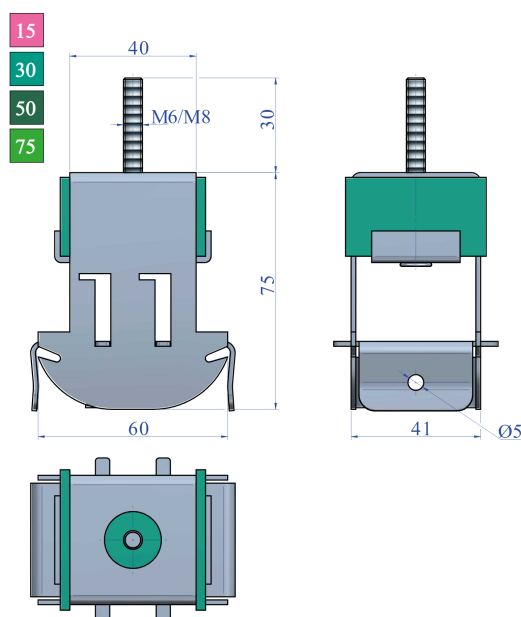

Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik Super T-60 + Sylomer®15 Type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	15	23195	M6	0.133
			23226	M8	0.133
Akustik Super T60 + Sylomer®30 Type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	30	23831	M6	M6
				M8	M8
Akustik Super T60 + Sylomer®50 Type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	50	23590	M6	M6
				M8	M8
Akustik Super T60 + Sylomer®75 Type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	75	23851	M6	M6
				M8	M8





Akustik Super T-60 + Sylomer®15 Type B / Akustik Super T60 + Sylomer®30 Type B / Akustik Super T60 + Sylomer®50 Type B / Akustik Super T60 + Sylomer®75 Type B

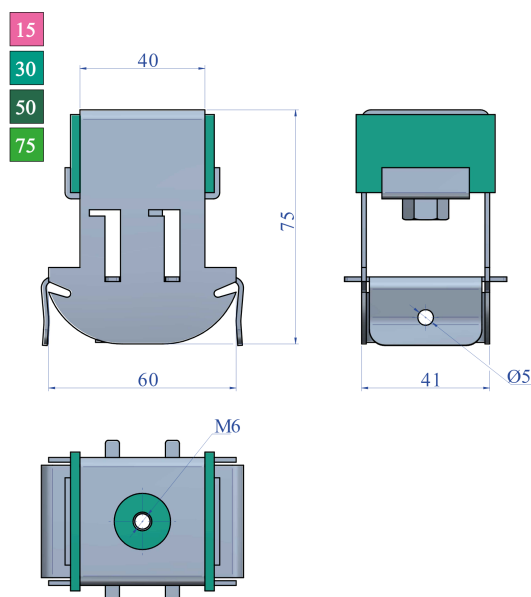





Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Akustik Super T-60 + Sylomer®15 Type B	Metal armor of the Akustik Super secured to the ceiling by an 6 screw.	15	23196	M6	0.133
			23227	M8	0.133
Akustik Super T60 + Sylomer®30 Type B	Metal armor of the Akustik Super secured to the ceiling by an screw.	30	30	23832	M6
				23229	M8
Akustik Super T60 + Sylomer®50 Type B	Metal armor of the Akustik Super secured to the ceiling by an screw.	50	50	23591	M6
				23233	M8
Akustik Super T60 + Sylomer®75 Type B	Metal armor of the Akustik Super secured to the ceiling by an screw.	75	75	23852	M6
				23853	M8

Elastic properties

LOAD DEFLECTION GRAPHS

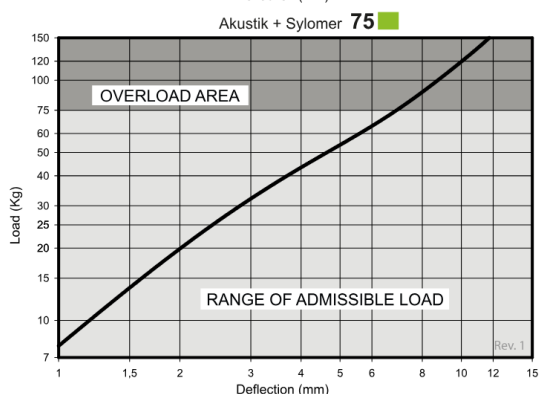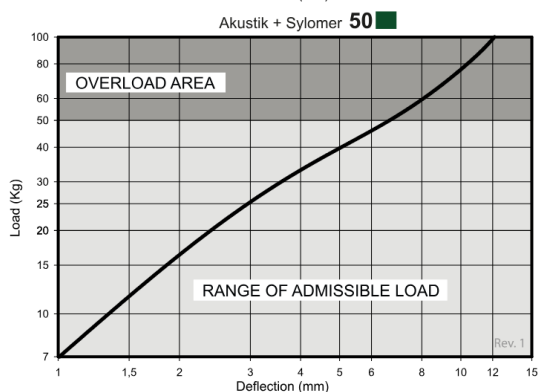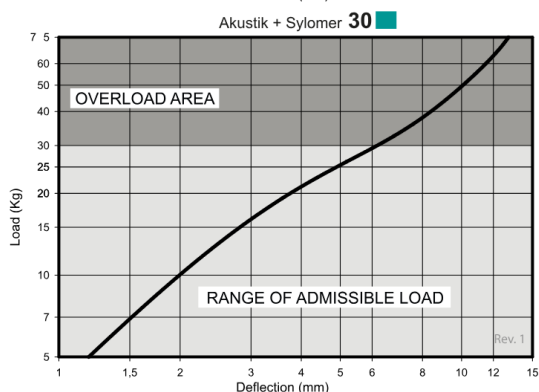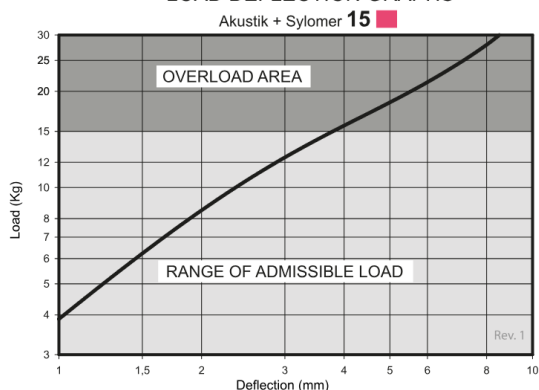

NATURAL FREQUENCY GRAPHS

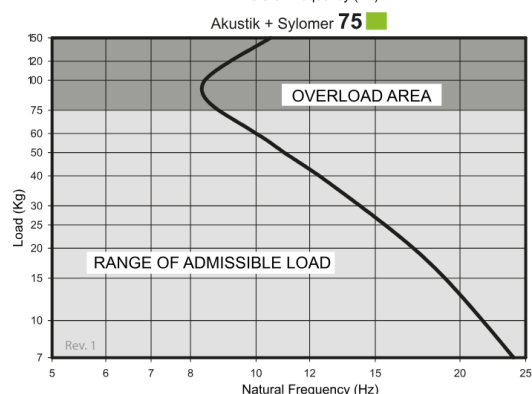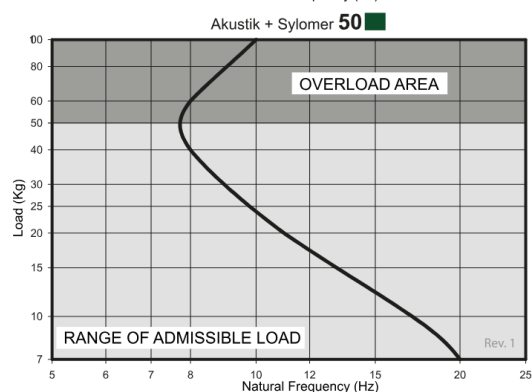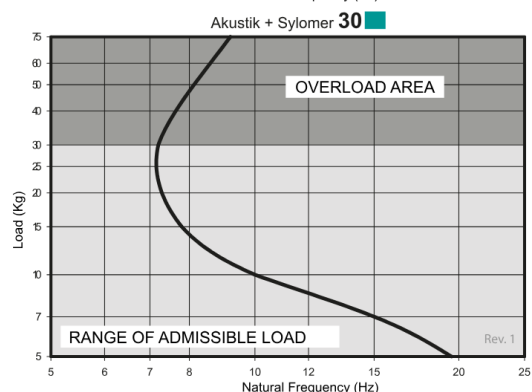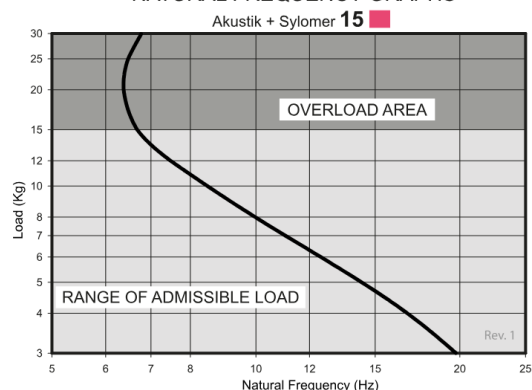

Technical characteristics

These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application. A great variety of fixing metal armors and elements facilitate installation and adapt better to each type of job. Their rugged metal parts withstand tensile stresses from 650 kg to 1000 kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.