

Akustik Super

Reinforced acoustic hanger for T-47 and T-60 ceiling profiles. Fast, secure installation with high traction resistance. Load range: 8–60 kg.




The Akustik Super range is designed for the suspension of acoustic ceilings and machinery operating above 1,000 rpm. Every model incorporates the same high-performance elastomer element, specifically engineered to provide effective vibration isolation and long-term mechanical reliability.

The reinforced steel housing is designed to support loads of up to 650 kg and is protected with a corrosion-resistant zinc-plated finish. Its clip-on design enables fast, secure installation on T-47 and T-60 (CD6027) ceiling profiles.


Drawings

Akustik Super T-47 A-45

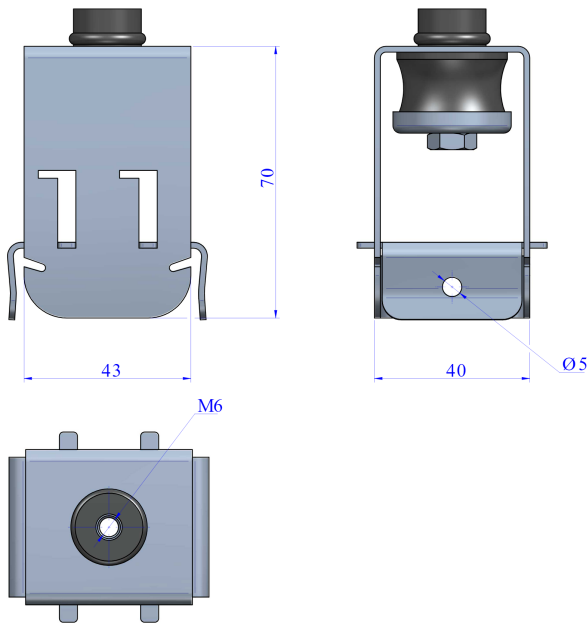


Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik Super T-47 A-45	-	8-30	23801	0.133

Akustik Super T-47 B-60

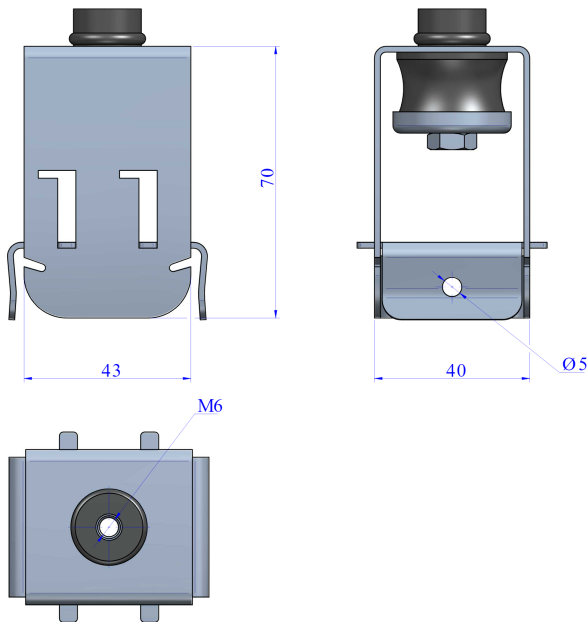


Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik Super T-47 B-60	-	25-60	23802	0.133

Akustik Super T-60 A-45

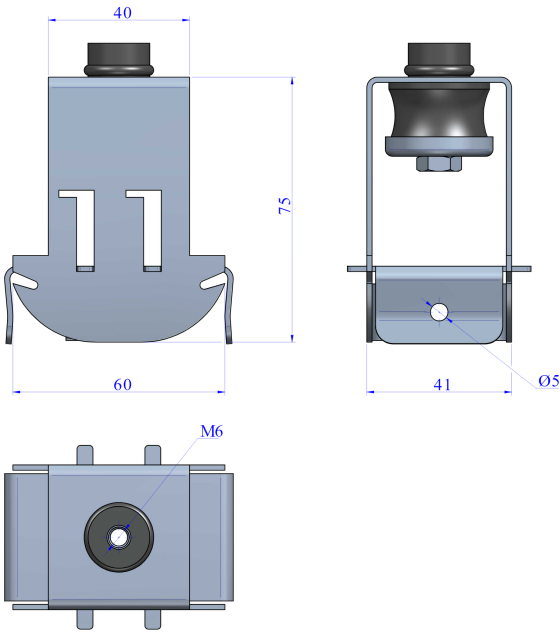




Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik Super T-60 A-45	-	8-30	23811	0.145

Akustik Super T-60 B-60

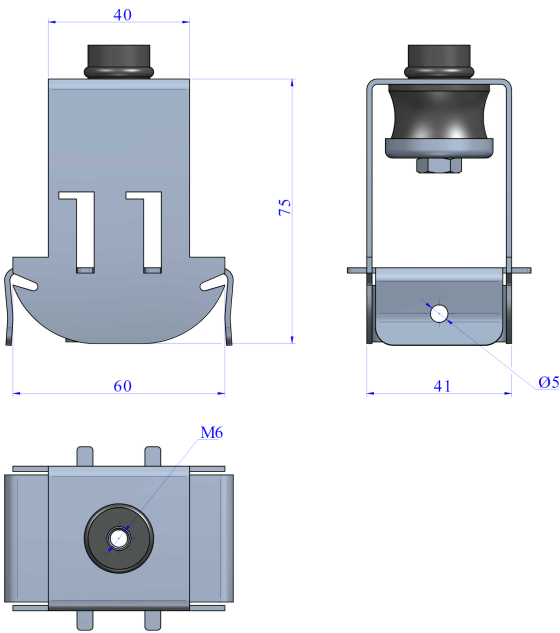

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik Super T-60 B-60	-	25-60	23812	0.145

Elastic properties

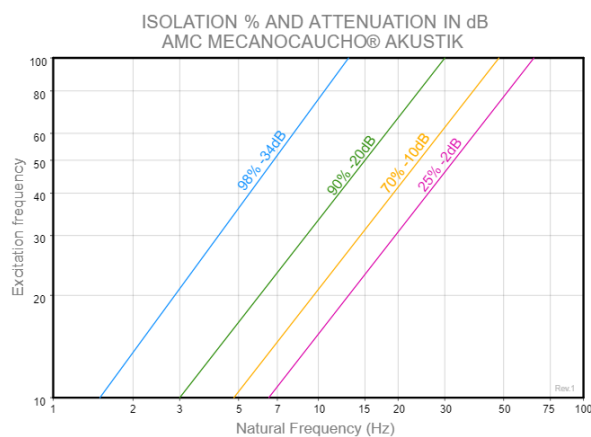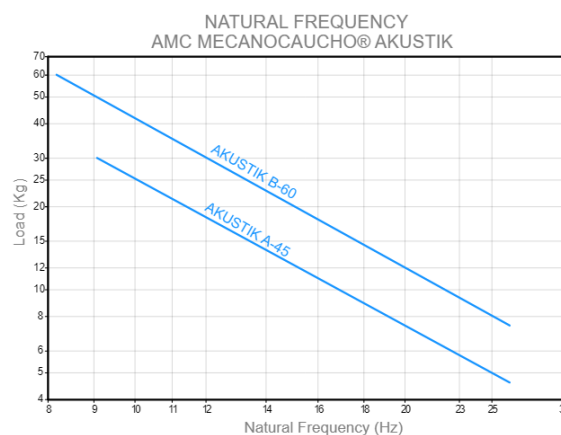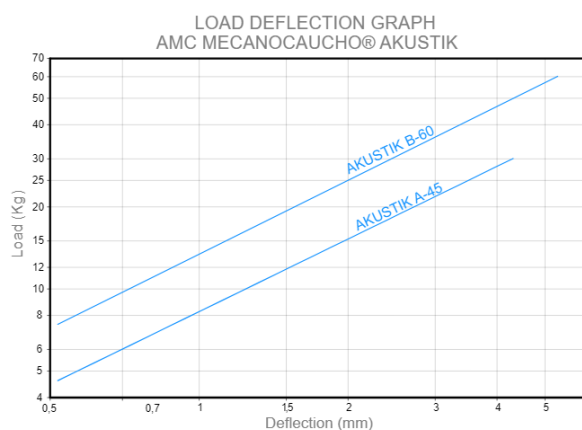

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com