
Akustik Slip Clip + Sylomer® Acoustic Hanger

Compact acoustic hanger with Sylomer® for Omega profiles of different widths. Ideal for suspended ceilings and wall linings where installation space is limited.

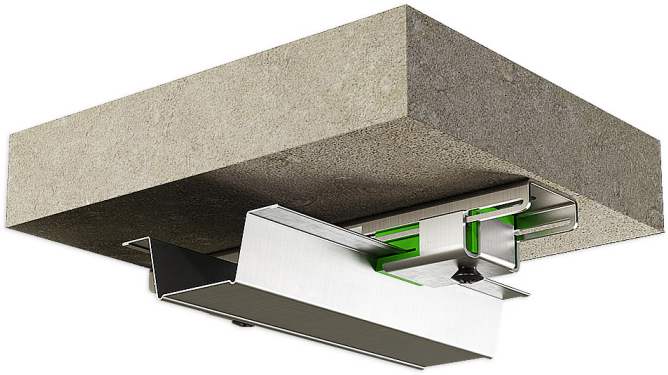

The Akustik Slip Clip + Sylomer® acoustic hanger is designed for the vibration isolation of suspended ceilings and wall linings constructed with Omega profiles.

Its adjustable design accommodates Omega profiles of different widths, providing a versatile fixing system for a wide range of ceiling and wall configurations.


The Sylomer® elastic element effectively reduces the transmission of vibration and structure-borne noise to the supporting structure. Its compact design minimises the required installation height, making it particularly suitable for projects where available space is limited.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

Akustik Slip Clip + Sylomer 8 / Akustik Slip Clip + Sylomer 15 / Akustik Slip Clip + Sylomer 30

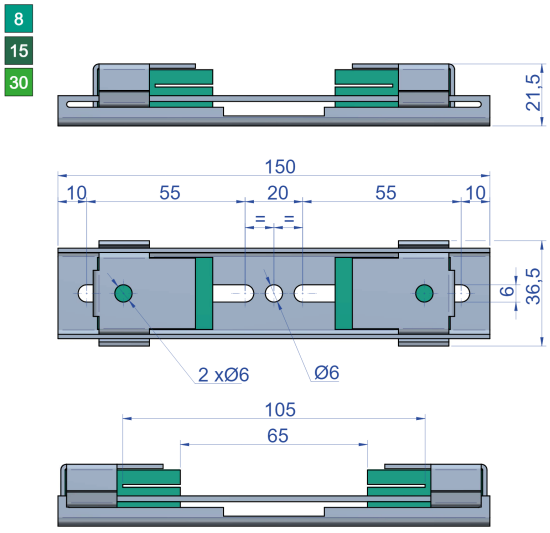

MAX. EXTENSION

MAX. CHANNEL WIDTH = 82
MIN. CHANNEL WIDTH = 63,5

Type	Max.Load (kg)	Code	Weight(kg)
Akustik Slip Clip + Sylomer 8	8	23835	0,12
Akustik Slip Clip + Sylomer 15	15	23628	0,12
Akustik Slip Clip + Sylomer 30	30	23688	0,12

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Technical characteristics

- Elastic **Sylomer® element** to reduce the transmission of vibration and structure-borne noise.
- Compatible with **Omega channels of different widths**.
- Compact design to **minimize ceiling height loss**.
- Suitable for the **acoustic decoupling of suspended ceilings and wall assemblies with metal framing**.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Excellent value for money

This mount delivers very high performance for its cost compared with other possible solutions.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.