Akustik T + Sylomer® Acoustic Hanger

Acoustic hanger with Sylomer® for suspended T-grid ceilings. Fast installation and effective isolation of vibration and structure-borne noise.



The Akustik T + Sylomer® acoustic hanger is specifically designed for the vibration isolation of suspended ceilings using T-grid systems.

It attaches directly to the ceiling profile, allowing quick and straightforward installation. The Sylomer® elastic element effectively reduces the transmission of vibration and structure-borne noise between the suspended ceiling and the supporting structure.


The Akustik T + Sylomer® is particularly suitable for offices, technical rooms and other applications requiring a suspended T-grid ceiling combined with high-performance vibration isolation.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Drawings

Akustik T + Sylomer 15 / Akustik T + Sylomer 30 / Akustik T + Sylomer 50 / Akustik T + Sylomer 75

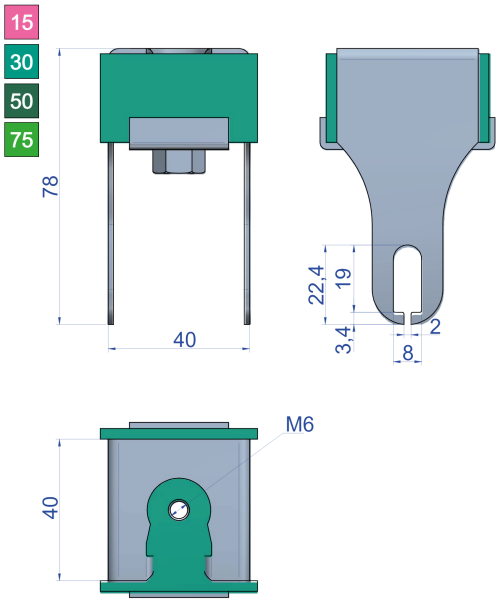

Type	Max.Load (kg)	Code	Weight(kg)
Akustik T + Sylomer 15	15	23795	0.118
Akustik T + Sylomer 30	30	23797	0.118
Akustik T + Sylomer 50	50	23798	0.118
Akustik T + Sylomer 75	75	23799	0.118


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


Akustik + Sylomer **15**

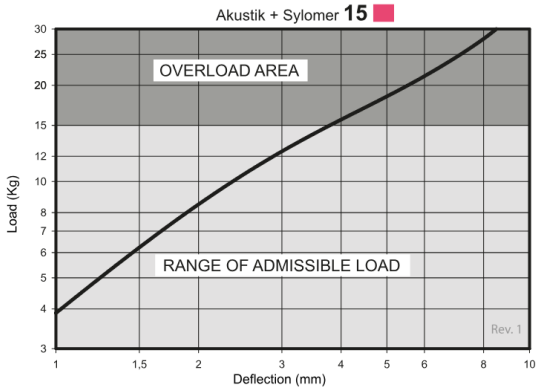


Akustik + Sylomer **30**

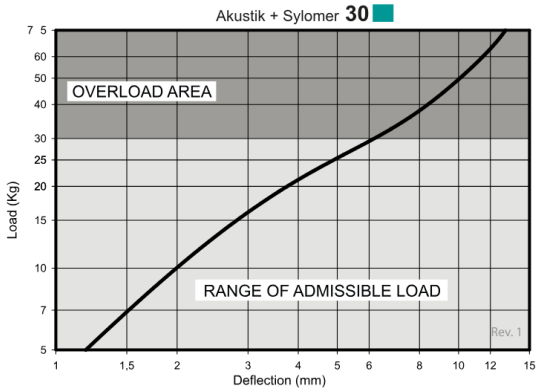

Akustik + Sylomer **50**

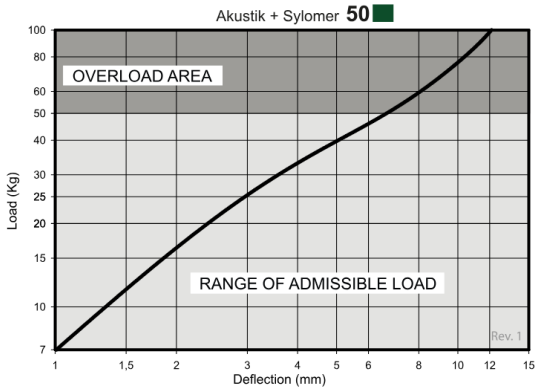


Akustik + Sylomer **75**

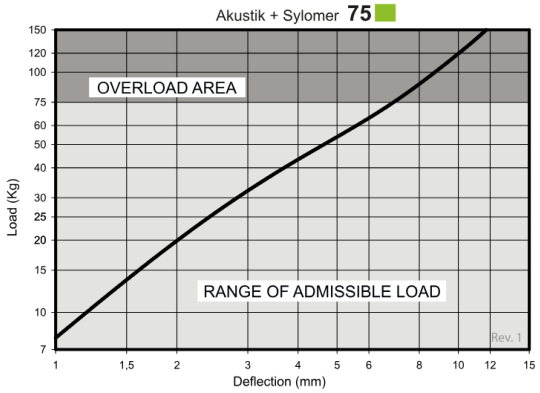


NATURAL FREQUENCY GRAPHS


Akustik + Sylomer **15**

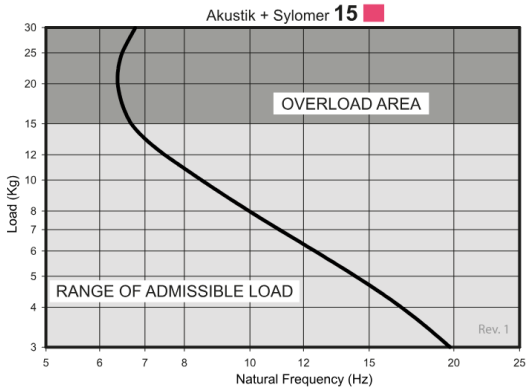


Akustik + Sylomer **30**

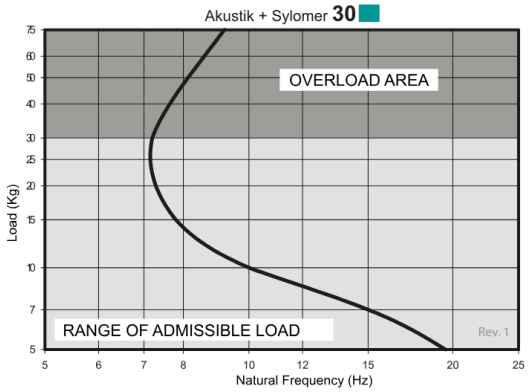

Akustik + Sylomer **50**

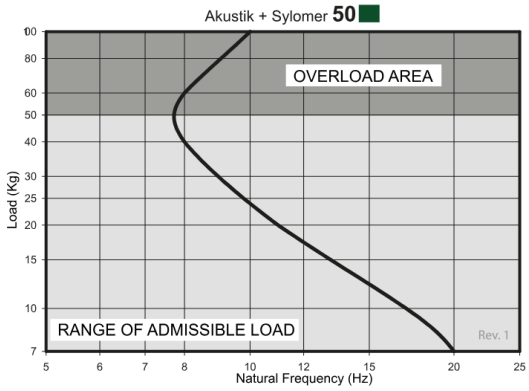

Akustik + Sylomer **75**

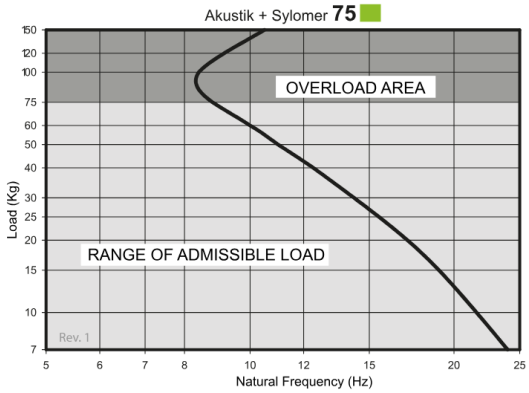

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.