

Akustik T + Sylomer® Acoustic Hanger

Acoustic hanger with Sylomer® for suspended T-grid ceilings. Fast installation and effective isolation of vibration and structure-borne noise.



The Akustik T + Sylomer® acoustic hanger is specifically designed for the vibration isolation of suspended ceilings using T-grid systems.


It attaches directly to the ceiling profile, allowing quick and straightforward installation. The Sylomer® elastic element effectively reduces the transmission of vibration and structure-borne noise between the suspended ceiling and the supporting structure.

The Akustik T + Sylomer® is particularly suitable for offices, technical rooms and other applications requiring a suspended T-grid ceiling combined with high-performance vibration isolation.



Drawings





Akustik T + Sylomer 15 / Akustik T + Sylomer 30 / Akustik T + Sylomer 50 / Akustik T + Sylomer 75

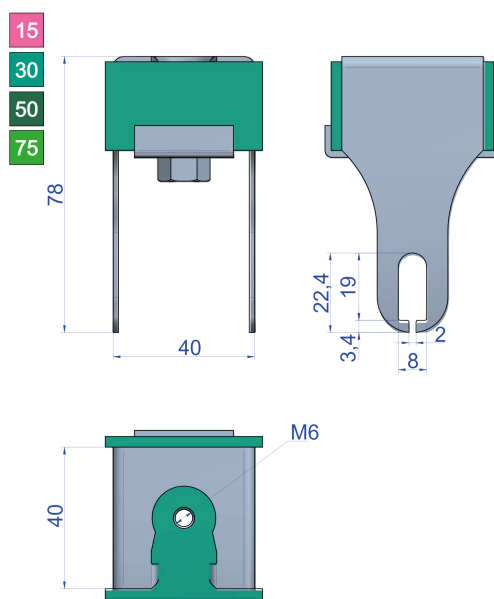





Type	Max.Load (kg)	Code	Weight(kg)
Akustik T + Sylomer 15	15	23795	0.118
Akustik T + Sylomer 30	30	23797	0.118
Akustik T + Sylomer 50	50	23798	0.118
Akustik T + Sylomer 75	75	23799	0.118

Elastic properties

LOAD DEFLECTION GRAPHS

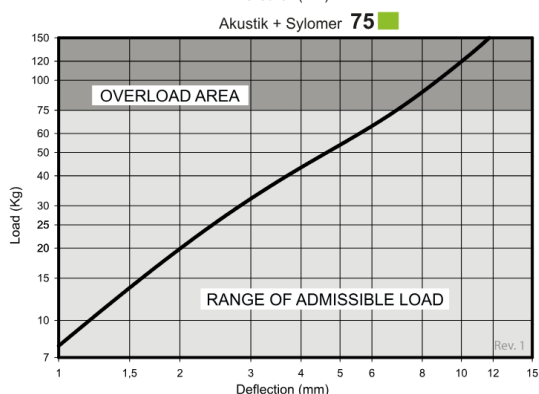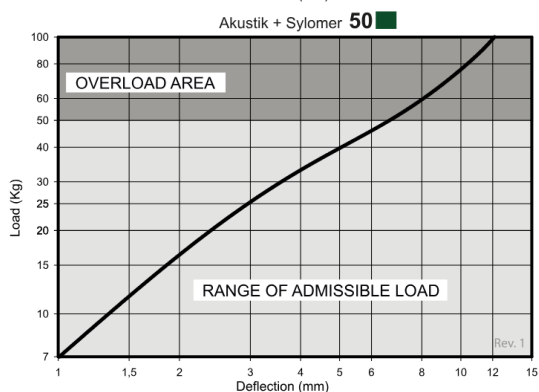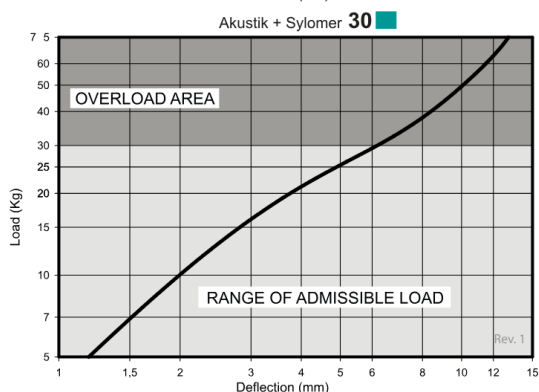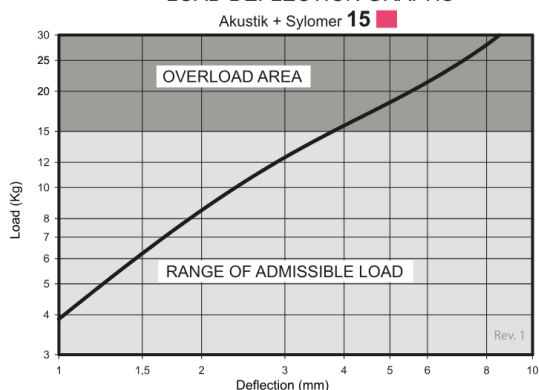

NATURAL FREQUENCY GRAPHS

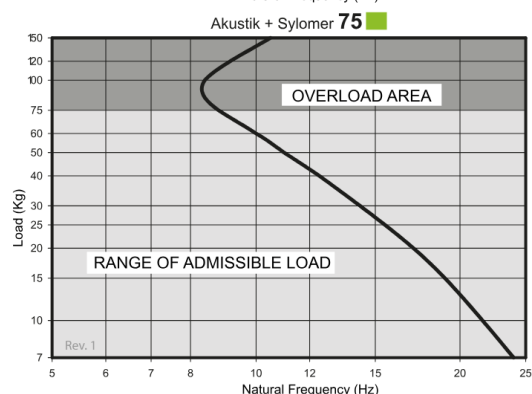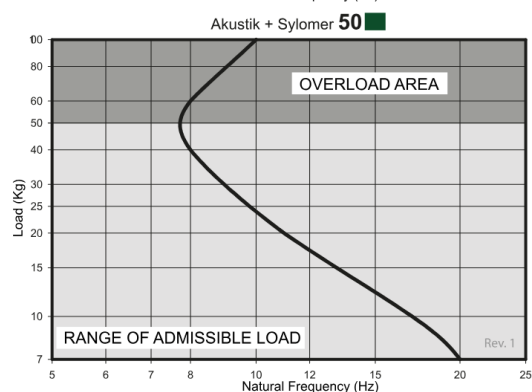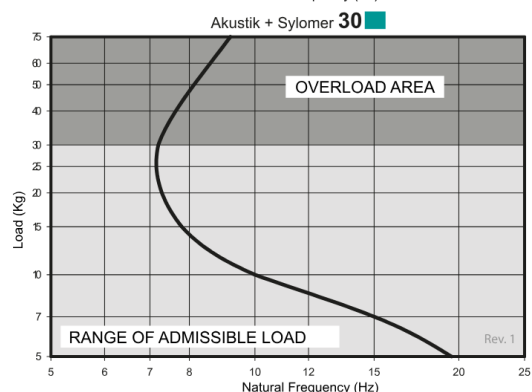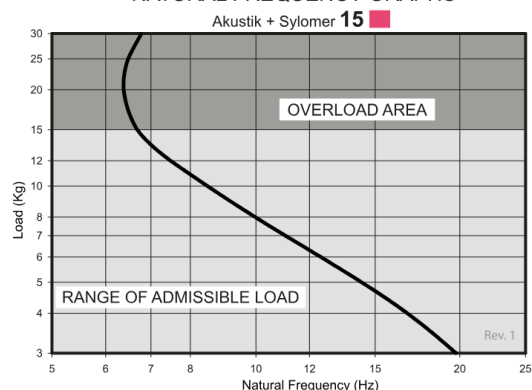

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com