
EP 700 Super + Sylomer®

Direct-fixing acoustic hanger with Sylomer®. Double fixing to the structure, particularly suitable for suspended ceilings beneath timber structures.

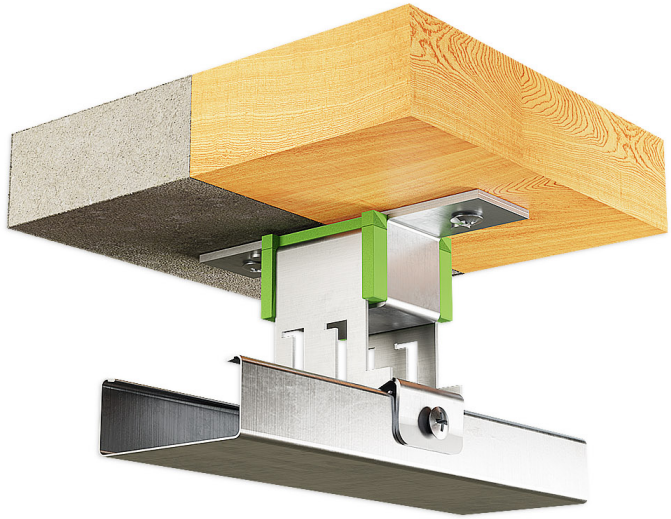

The EP 700 Super + Sylomer® acoustic hanger is designed for the acoustic isolation of suspended ceilings by means of direct fixing to the supporting structure, without the use of threaded rods.

Its Sylomer® elastic element effectively reduces the transmission of vibration and structure-borne noise between the suspended ceiling and the supporting structure. The double fixing provides a robust, secure and stable installation.


The EP 700 Super + Sylomer® is particularly suitable for timber structures, where it can be fixed directly to the structural element using two screws.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

EP 700 Super + Sylomer 30

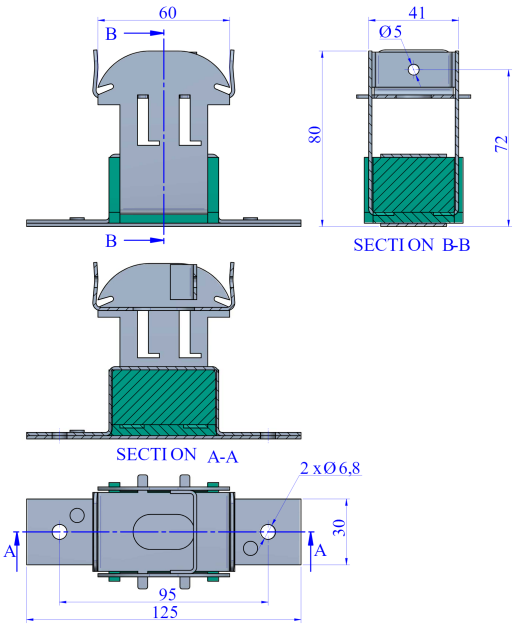


Type	SUMMARY	Code	Max. Load(kg)	Weight(kg)
EP 700 Super + Sylomer 30	They are secured by two “predrilled” and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique.	23745	30	0.28

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

EP 700 Super + Sylomer 75

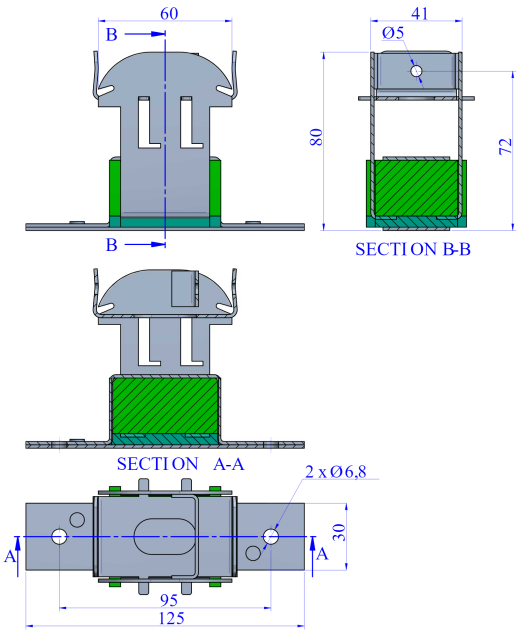

Type	SUMMARY	Code	Max. Load(kg)	Weight(kg)
EP 700 Super + Sylomer 75	They are secured by two “predrilled” and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique.	23746	75	0.28

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Secure ceiling anchorage

With more than one fixing point to the overhead slab, it is particularly reliable for anchorages with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.