

Grand Akustik 3 +Sylomer®

Heavy-duty acoustic hanger for double T profiles with adjustable slotted connection. High-performance Sylomer® vibration isolation.



The AMC-MECANOCAUCHO® Grand Akustik 3 + Sylomer® range has been specifically developed for the vibration isolation of suspended ceilings, HVAC services, pipework and suspended mechanical equipment requiring higher load capacities.

Designed for installation on double T profiles, its adjustable slotted connection allows precise positioning and simplifies installation while providing a secure suspension. The integrated Sylomer® microcellular polyurethane element effectively reduces the transmission of structure-borne vibration and noise and is available in different stiffness grades to match the supported load.

The Grand Akustik 3 + Sylomer® combines high load capacity, installation flexibility and outstanding long-term acoustic performance. Heavy-duty steel components are protected by a corrosion-resistant finish, ensuring reliable performance in demanding commercial and industrial environments.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain


Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

Drawings

Grand Akustik3 + Sylomer®60 Type A / Grand Akustik 3 + Sylomer®100 Type A / Grand Akustik3 + Sylomer®150 Type A

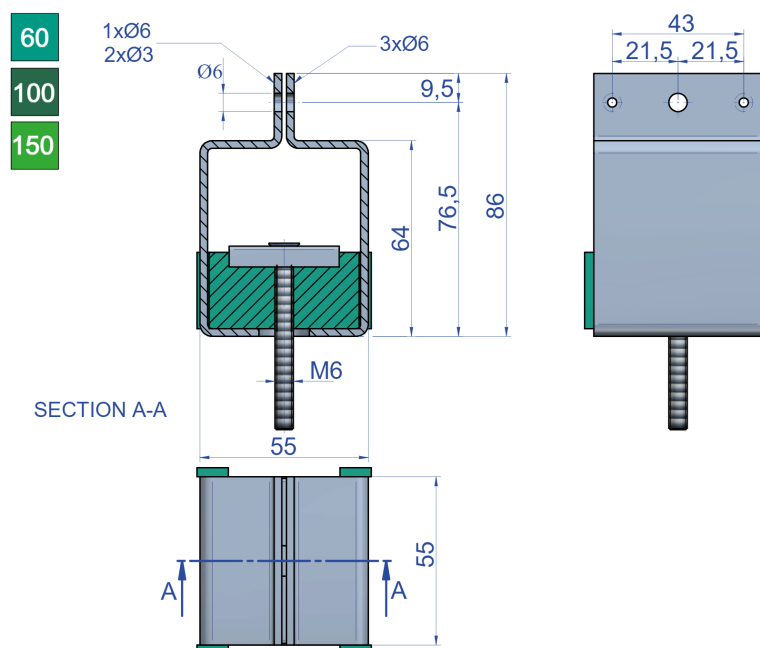

Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Grand Akustik3 + Sylomer®60 Type A	It is secured directly to the ceiling by means of one screw and to the "inverted double T" type profile thanks to the design of its metal armor.	60	23607	M6	0.396
Grand Akustik 3 + Sylomer®100 Type A	It is secured directly to the ceiling by means of one screw and to the "inverted double T" type profile thanks to the design of its metal armor.	100	23598	M6	0.396
Grand Akustik3 + Sylomer®150 Type A	It is secured directly to the ceiling by means of one screw and to the "inverted double T" type profile thanks to the design of its metal armor.	150	23623	M6	0.396




AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

Grand Akustik 3 + Sylomer®60 Type B / Grand Akustik 3 + Sylomer®100 Type B / Grand Akustik 3 + Sylomer®150 Type B

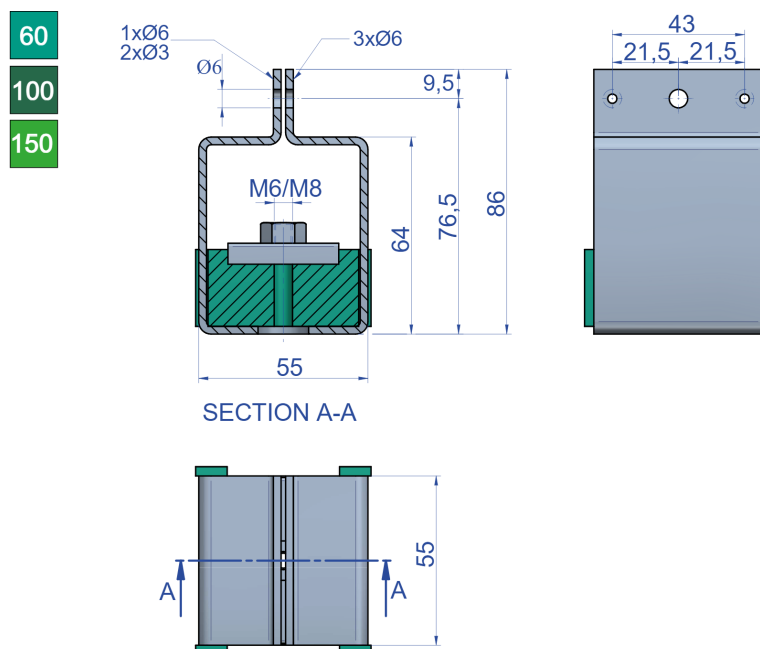

Type	SUMMARY	Max.Load (kg)	Code	M	Weight(kg)
Grand Akustik 3 + Sylomer®60 Type B	It is secured directly to the ceiling by means of a "Type B" female fixing and to the "inverted double T" type profile thanks to the design of its metal armor.	60	23615	M6	0.396
			23884	M8	0.396
Grand Akustik 3 + Sylomer®100 Type B	It is secured directly to the ceiling by means of one "type B" female screw and to the "inverted double T" type profile thanks to the design of its metal armor.	100	23599	M6	0.396
			23885	M8	0.396
Grand Akustik 3 + Sylomer®150 Type B	It is secured directly to the ceiling by means of one "type B" female screw and to the "inverted double T" type profile thanks to the design of its metal armor.	150	23631	M6	0.396
			23639	M8	0.396









AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

Elastic properties

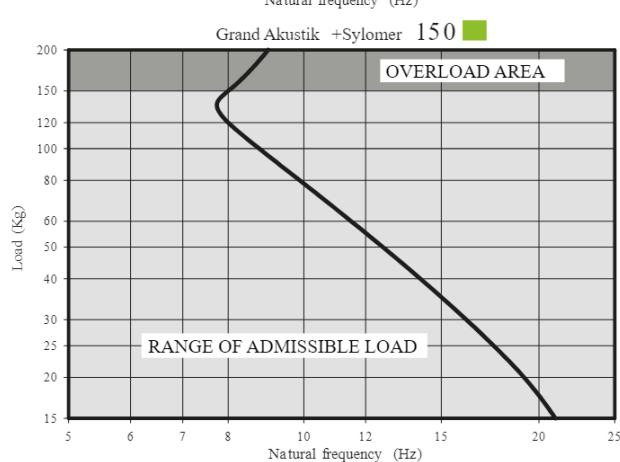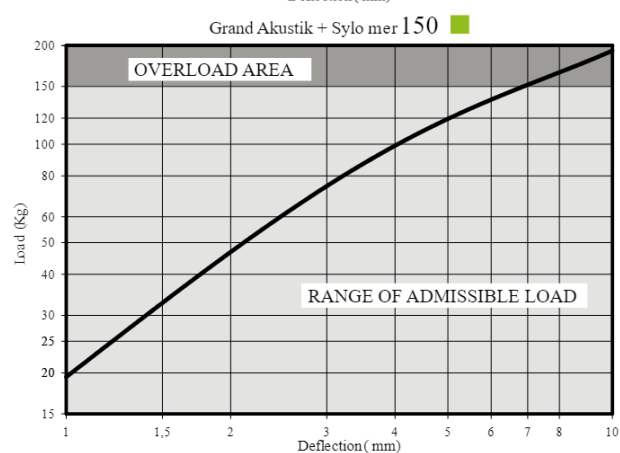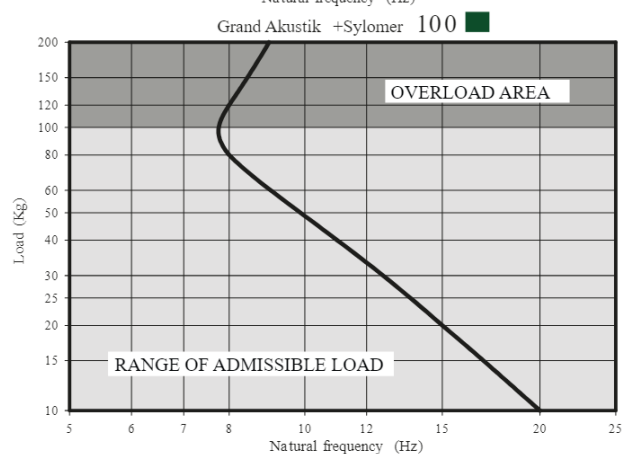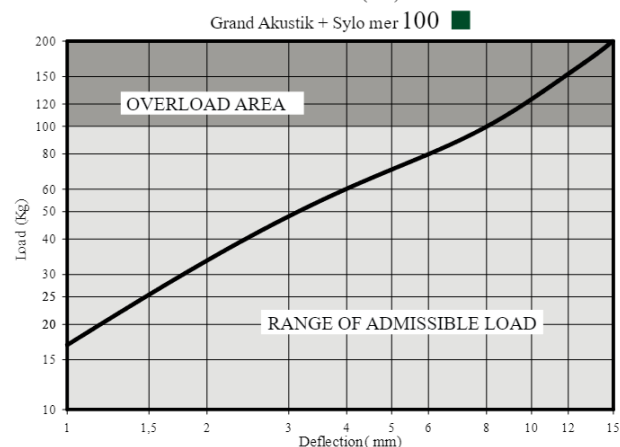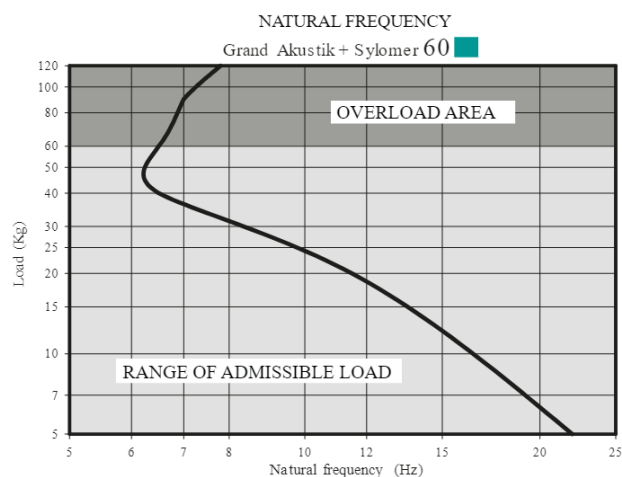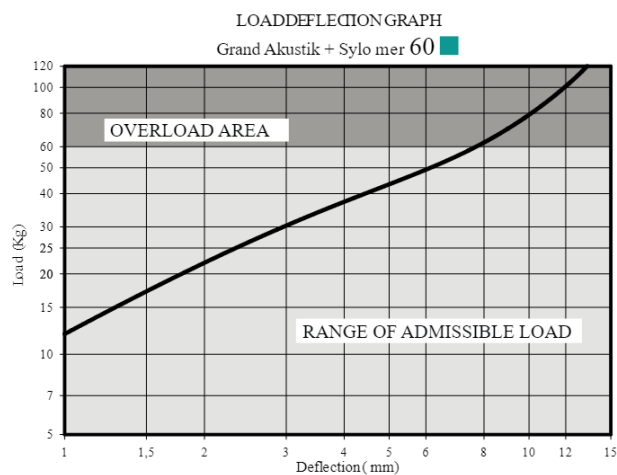

Technical characteristics

These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application. A great variety of fixing windows and elements facilitate installation and adapt better to each type of job.

Their rugged metal parts can withstand tensile stresses from 650 to 1000 Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.