GRAND AKUSTIK 2 + SYLOMER®

These acoustic hangers have been conceived for suspension from suspended ceilings with 12 gauge wires, vibrating pipelines and machinery



These **acoustic hangers** have been conceived for the suspension of false ceilings, vibrating pipelines and machinery that has to be suspended.

The excellent properties of the Sylomer® microcellular polyurethane material achieve elevated isolation values as opposed to other mounts that use rubber or cork, or a combination of both. These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application.


A great variety of fixing metal armors and elements facilitate the installation and to adapt better to each type of job. Their rugged metal parts can withstand tensile stresses from 650Kg to 1000Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings

Grand Akustik 2 + Sylomer®60 Type C / Grand Akustik 2 + Sylomer®100 Type C / Grand Akustik 2 + Sylomer®150 Type C

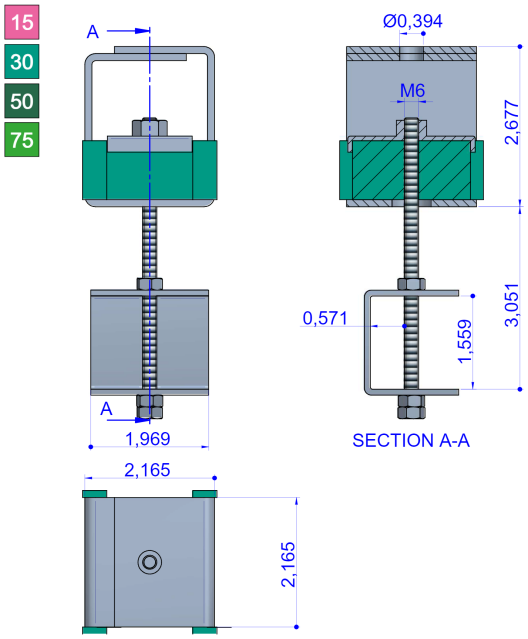


Type	Max. Load (lbs)	Code
Grand Akustik 2 + Sylomer®60 Type C	132	25628
Grand Akustik 2 + Sylomer®100 Type C	220	25629
Grand Akustik 2 + Sylomer®150 Type C	331	25630

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Grand Akustik 2 + Sylomer®60 Type D / Grand Akustik 2 + Sylomer®100 Type D

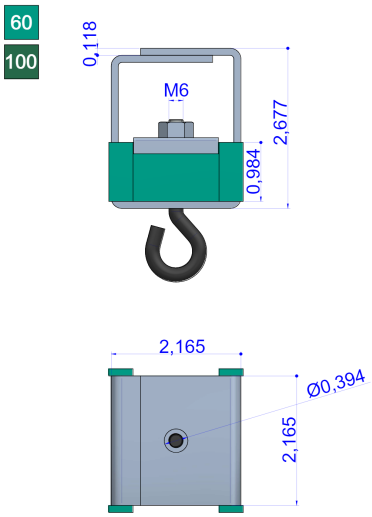

Type	Max. Load (lbs)	Code
Grand Akustik 2 + Sylomer®60 Type D	132	23078
Grand Akustik 2 + Sylomer®100 Type D	220	23079

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Technical characteristics

These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application. A great variery of fixing windows and elements facilitate installation and adapt better to each type of job.

Their rugged metal parts can withstand tensile stresses from 650 to 1000 Kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.