

Akustik Lateral

Acoustic hanger for lateral wall or beam mounting. Ideal where direct ceiling fixing is not possible.




The Akustik Lateral range is designed for the suspension of acoustic ceilings and machinery operating above 1,000 rpm where lateral mounting is required. Every model incorporates the same high-performance elastomer element, specifically engineered to provide effective vibration isolation and long-term mechanical reliability.

The steel housing is designed to support loads of up to 650 kg and is protected with a corrosion-resistant zinc-plated finish. Its lateral mounting configuration provides a practical solution where direct fixing to the structural slab is not possible.




Drawings

Akustik Lateral A-45 / Akustik Lateral B-60

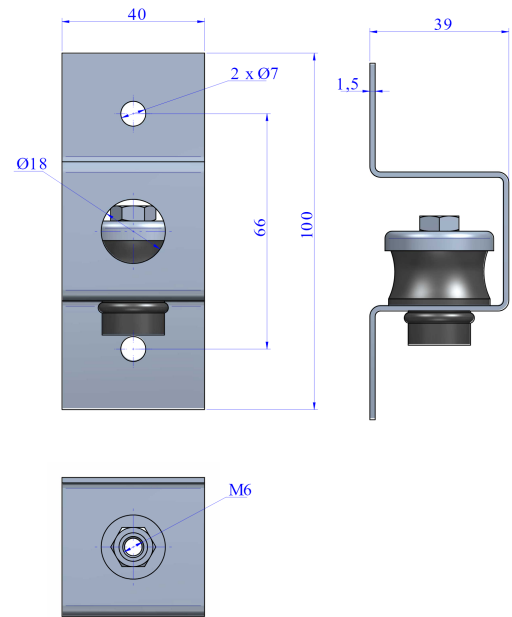

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
Akustik Lateral A-45	-	8-30	23571	0.138
	Akustik Lateral B-60	-	25-60	23572

Elastic properties

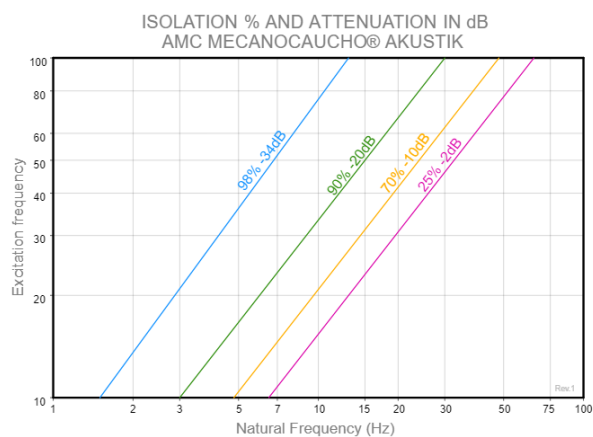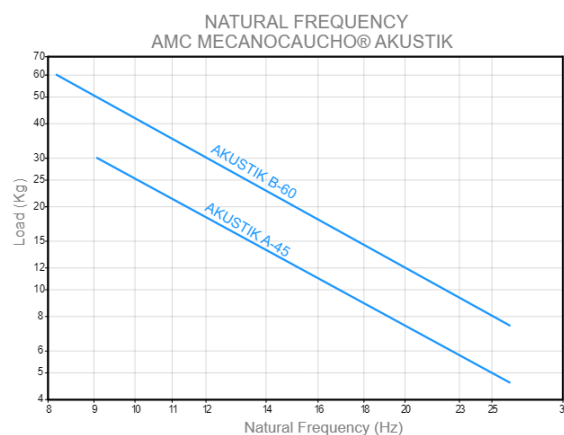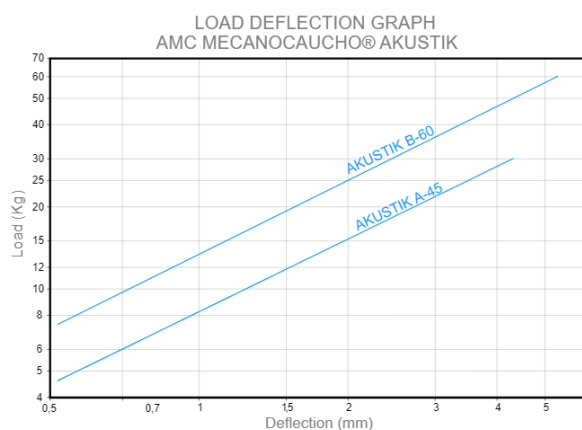

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com