

SRS +Sylomer®

Spring and Sylomer® acoustic hanger for suspended ceilings and machinery. Outstanding vibration isolation across a wide frequency range. Load range: 25–150 kg.



The SRS + Sylomer® range is designed for the suspension of acoustic ceilings and suspended machinery requiring superior vibration isolation.

By combining the high deflection of a steel spring with the damping properties of Sylomer® microcellular polyurethane, these hangers provide outstanding low-frequency vibration isolation while effectively controlling spring resonance and improving mid-frequency performance.

This hybrid design delivers reliable long-term performance for applications where maximum isolation efficiency is required.



Drawings

SRS 25 + SYLOMER®

Type	Max. Load(kg)	Spring color	Code	Weight(kg)
SRS 25 + SYLOMER®	25	Black	23546	0.876

SRS 50 + SYLOMER®

Type	Max. Load(kg)	Spring color	Code	Weight(kg)
SRS 50 + SYLOMER®	50	Blue	23547	0.865

SRS 75 + SYLOMER®

Type	Max. Load(kg)	Spring color	Code	Weight(kg)
SRS 75 + SYLOMER®	75	Grey	23551	0.858

SRS 100 + SYLOMER®

Type	Max. Load(kg)	Spring color	Code	Weight(kg)
SRS 100 + SYLOMER®	100	Beige	23548	0.897


SRS 125 + SYLOMER®

Type	Max. Load(kg)	Spring color	Code	Weight(kg)
SRS 125 + SYLOMER®	125	White	23549	0.875

SRS 150 + SYLOMER®

Type	Max. Load(kg)	Spring color	Code	Weight(kg)
SRS 150 + SYLOMER®	150	Black	23550	0.956

Elastic properties

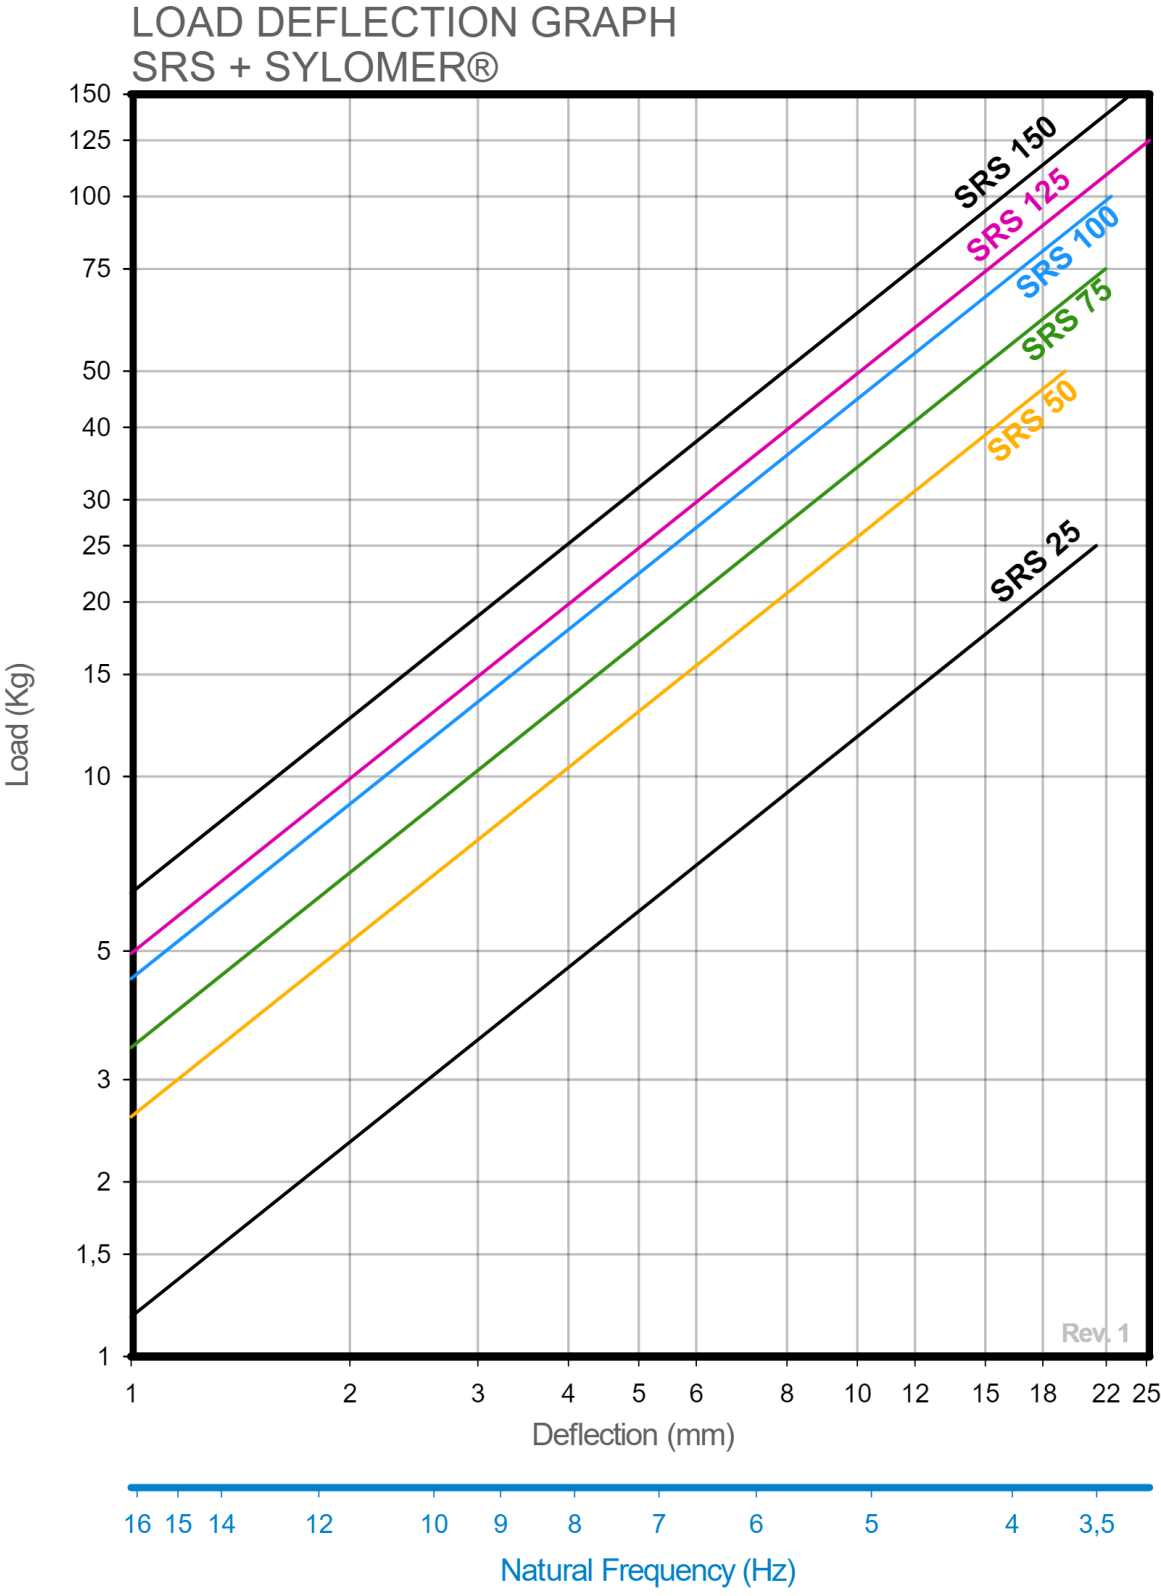

Technical characteristics

These antivibration mounts are manufactured in 6 different steel spring models to adapt optimal for each application.

Their rugged metal parts withstand can tensile stresses. They are supplied with an anticorrosive treatment that can resist tensile stresses up to 1000Kg withstand the toughest environments.

NEVER METAL TO METAL CONTACT

The hanger has a clearance that allows the threaded rod to swing within a 35° angle envelope to absorb irregularities in the ceiling.