SRS + SYLOMER

Spring and Sylomer® acoustic hanger for high-performance vibration isolation, particularly at low frequencies. Load capacity up to 330 lb.



The **SRS + SYLOMER® acoustic hangers** are designed for the vibration isolation of suspended ceilings and mechanical equipment operating at low frequencies.

The system combines the **low stiffness of a steel spring** with the damping properties of **Sylomer® microcellular polyurethane**, providing effective vibration isolation over a broad frequency range.


This combination improves isolation performance compared with conventional rubber or cork hangers and is particularly suitable for applications where **low-frequency vibration isolation** is required.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings

SRS 25 + SYLOMER® Type C / SRS 50 + SYLOMER® Type C / SRS 75 + SYLOMER® Type C / SRS 100 + SYLOMER® Type C / SRS 125 + SYLOMER® Type C / SRS 150 + SYLOMER® Type C

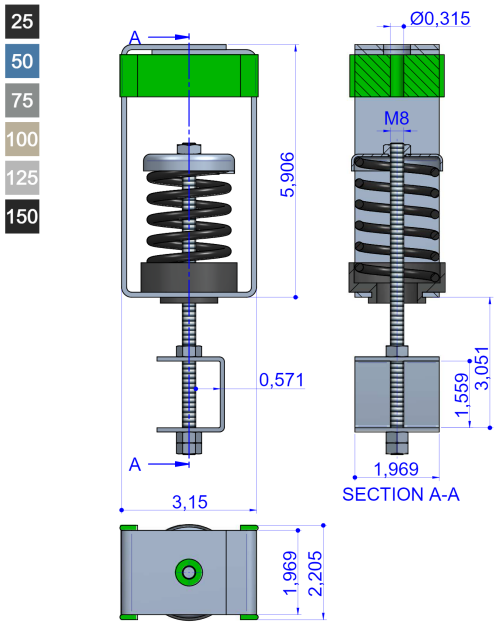


Type	Spring color	Max. Load(lbs)	Code
SRS 25 + SYLOMER® Type C	Black	55	25600
SRS 50 + SYLOMER® Type C	Blue	110	25601
SRS 75 + SYLOMER® Type C	Grey	165	25602
SRS 100 + SYLOMER® Type C	Beige	220	25603
SRS 125 + SYLOMER® Type C	White	276	25604
SRS 150 + SYLOMER® Type C	Black	331	25605

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

SRS 25 + SYLOMER® Type D / SRS 50 + SYLOMER® Type D / SRS 75 + SYLOMER® Type D / SRS 100 + SYLOMER® Type D

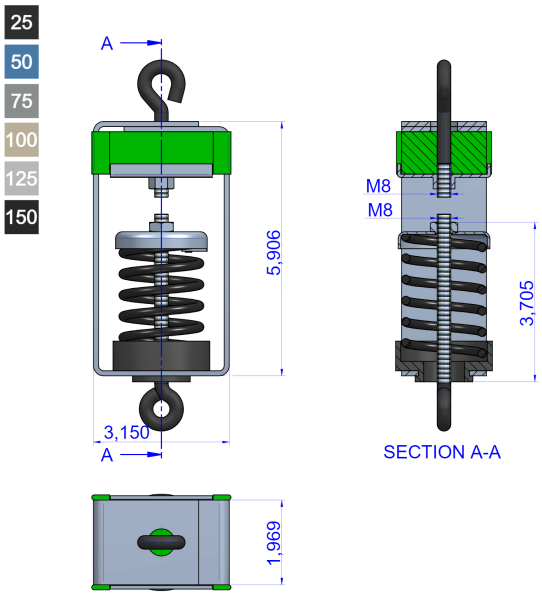


Type	Spring color	Max. Load(lbs)	Code
SRS 25 + SYLOMER® Type D	Black	55	23487
SRS 50 + SYLOMER® Type D	Blue	110	23488
SRS 75 + SYLOMER® Type D	Grey	165	23489
SRS 100 + SYLOMER® Type D	Beige	220	23490

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Elastic properties

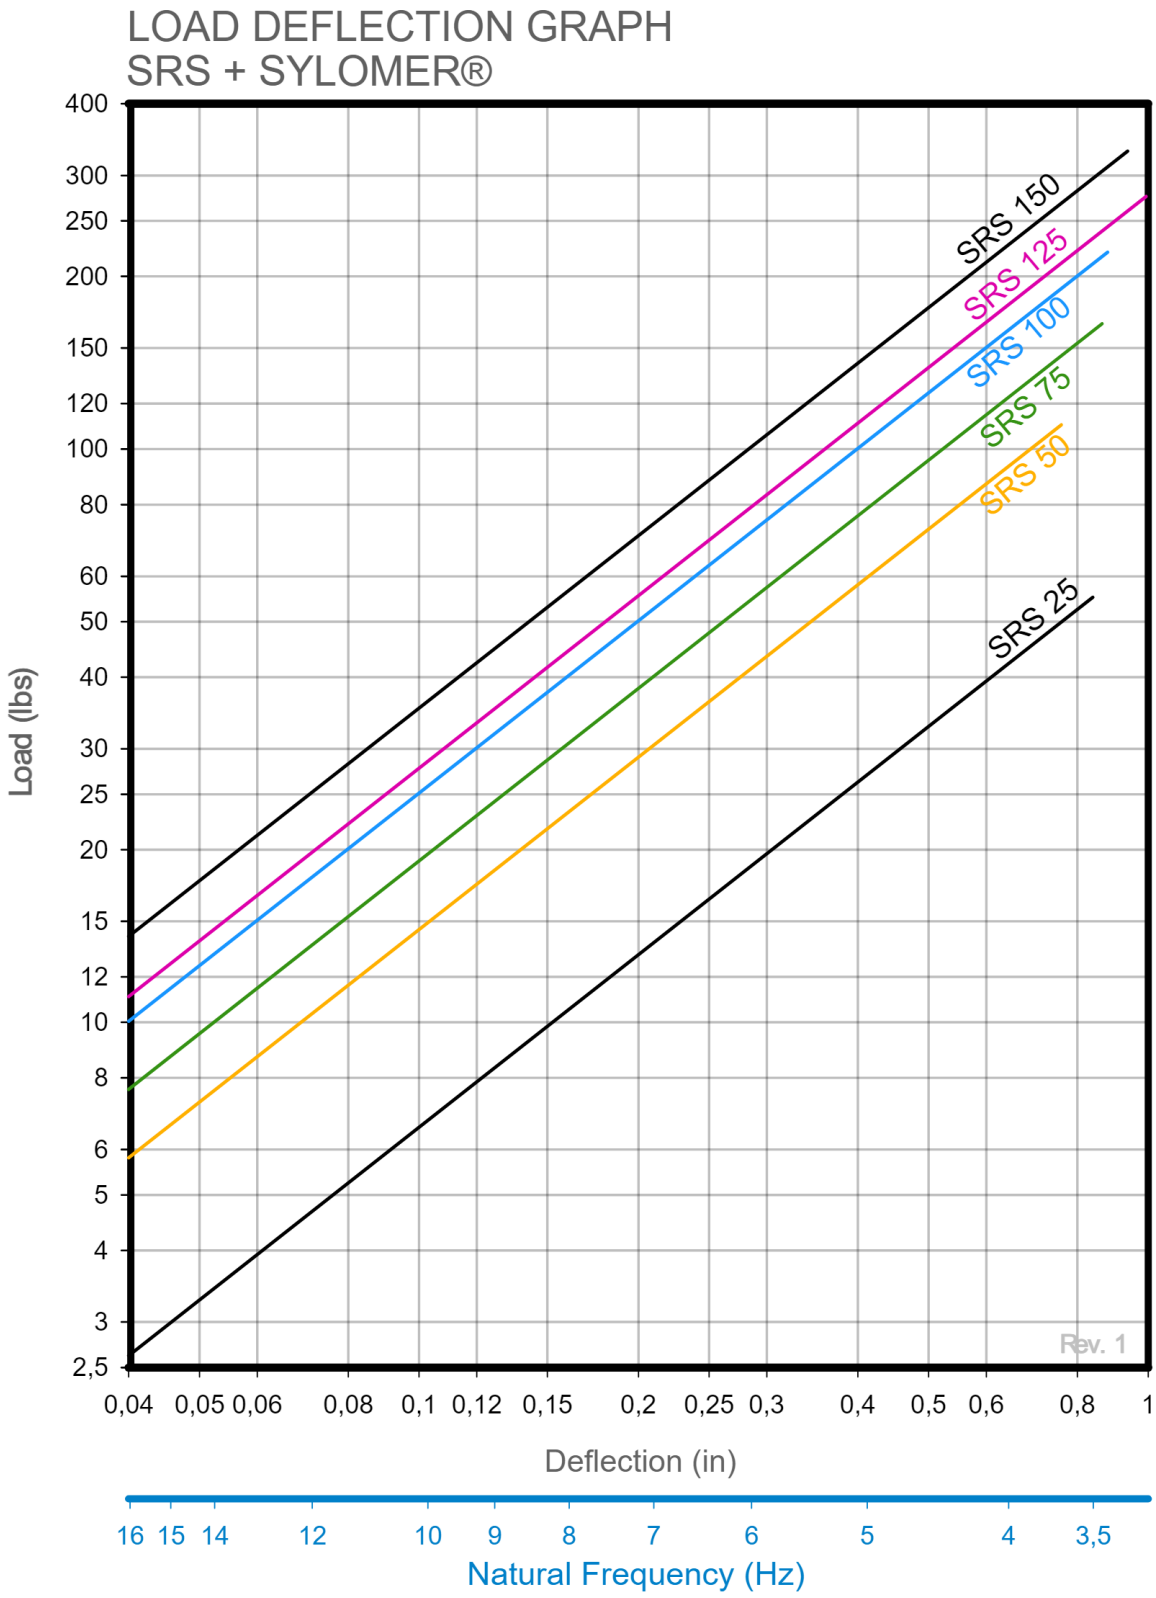

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Technical characteristics

These antivibration mounts are manufactured in 6 different steel spring models to adapt optimal for each application.

Their rugged metal parts withstand can tensile stresses. They are supplied with an anticorrosive treatment that can resist tensile stresses up to 1000Kg withstand the toughest environments.

NEVER METAL TO METAL CONTACT

The hanger has a clearance that allows the threaded rod to swing within a 35° angle envelope to absorb irregularities in the ceiling.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.