

EP 100

Rubber acoustic isolation mount for the resilient fixing of independent wall linings. A simple, robust and economical solution with mechanical screw fixing.



The **EP 100** is a rubber acoustic isolation mount designed for the **resilient fixing of independent acoustic wall linings**, reducing the transmission of vibration and **structure-borne sound** between the lining and the supporting structure.

Its **resilient rubber element** provides a flexible connection at the fixing point, limiting **acoustic bridges** and improving the overall acoustic performance of the wall system.

Its simple and robust design, with **mechanical screw fixing**, provides reliable installation and an economical solution for applications requiring **localised resilient decoupling of the supporting framework**.

The EP 100 is particularly suitable for **independent wall linings, acoustic linings and other lightweight framing systems** requiring reduced transmission of vibration and structure-borne sound to the building structure.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13




sales@amcsa.es



www.mecanocaucho.com

Drawings

EP 100

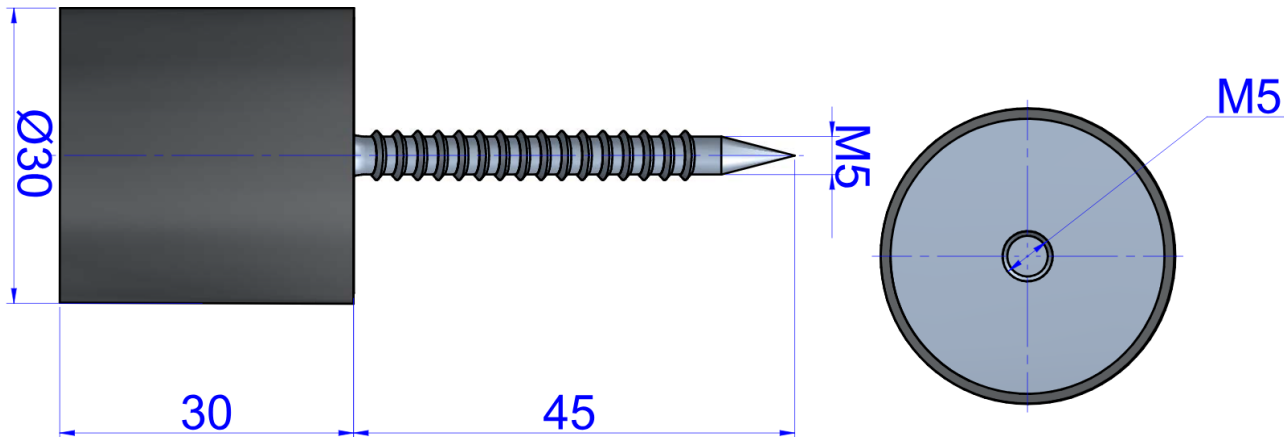

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
EP 100	Mount designed for vibration damping of walls, equipped with long ring-attached screws for threading onto wooden or plastified walls. Maximum load per damper 10 kg.	-	24001	0,046

Technical characteristics

- Wall support with **screw anchoring**
- Elastic element made of **high-elasticity rubber**
- Simple solution for **acoustic wall linings**
- Basic reduction of structural vibrations
- Compact and cost-efficient design
- Less convenient installation than other solutions in the range



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com